

HT-LM-410B C

LED 4-HEAD MOVING BEAM LIGHT

RGBW 4IN1



User Manual




Please read this user manual before using this product



● Features

Voltage: AC100-240V. 50 / 60HZ
 Power Consumption: 200W
 LED: 4pcs 10W White CREE LED
 Cooling system: convection cooling
 Dimmer: 0~100%
 Strobe: 0~20/second
 Operation Mode: DMX 512/Sound Control/Master/slave mode
 LED Display, easy to control
 Channel: 14CH/36CH/39CH
 Scan speed: Pan 540°, tilt 270° speed adjustable
 Scan position: Reposition auto after unexpected movement,
 electronic auto position correction
 N.W: 11.5KG
 G.W: 12.5KG
 Size: 80*9*23CM

● LED display

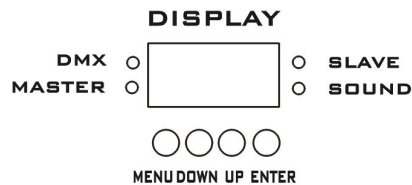

3-Pin XLR to 5-Pin XLR Conversion		
Conductor	3-Pin XLR Female (Out)	5-Pin XLR Male (In)
Ground/Shield	Pin 1	Pin 1
Data Compliment (- signal)	Pin 2	Pin 2
Data True (+ signal)	Pin 3	Pin 3
Not Used		Pin 4 - Do Not Use
Not Used		Pin 5 - Do Not Use

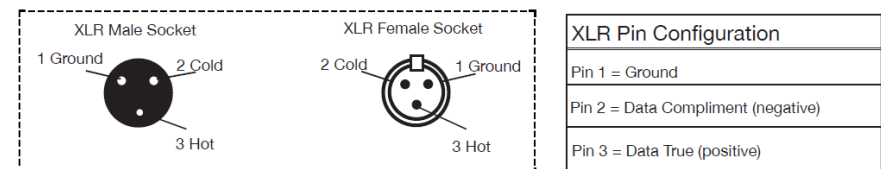

Safety instruction

This device has left our premises in absolutely perfect condition. In order to maintain this condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this manual.


Please note: Every information is subject to change without prior notice

13	0-255	BAR2	Pan Fine
14	0-255	BAR2	Tilt
15	0-255	BAR2	Tilt Fine
16	0-255	BAR2	Pan/Tilt Speed
17	0-255	BAR2	Red
18	0-255	BAR2	Green
19	0-255	BAR2	Blue
20	0-255	BAR2	White
21	0-255	BAR3	Pan
22	0-255	BAR3	Pan Fine
23	0-255	BAR3	Tilt
24	0-255	BAR3	Tilt Fine
25	0-255	BAR3	Pan/Tilt Speed
26	0-255	BAR3	Red
27	0-255	BAR3	Green
28	0-255	BAR3	Blue
29	0-255	BAR3	White
30	0-255	BAR4	Pan
31	0-255	BAR4	Pan Fine
32	0-255	BAR4	Tilt
33	0-255	BAR4	Tilt Fine
34	0-255	BAR4	Pan/Tilt Speed
35	0-255	BAR4	Red
36	0-255	BAR4	Green
37	0-255	BAR4	Blue
38	0-255	BAR4	White
39	150-200	Reset	

● 3-pin XLR

Note:1, To the function mode you need, press Enter to confirm, press MODE about two seconds to quit. 2, The equipment can accept DMX signal whenever active mode, DMX is preferential.

● Digital display

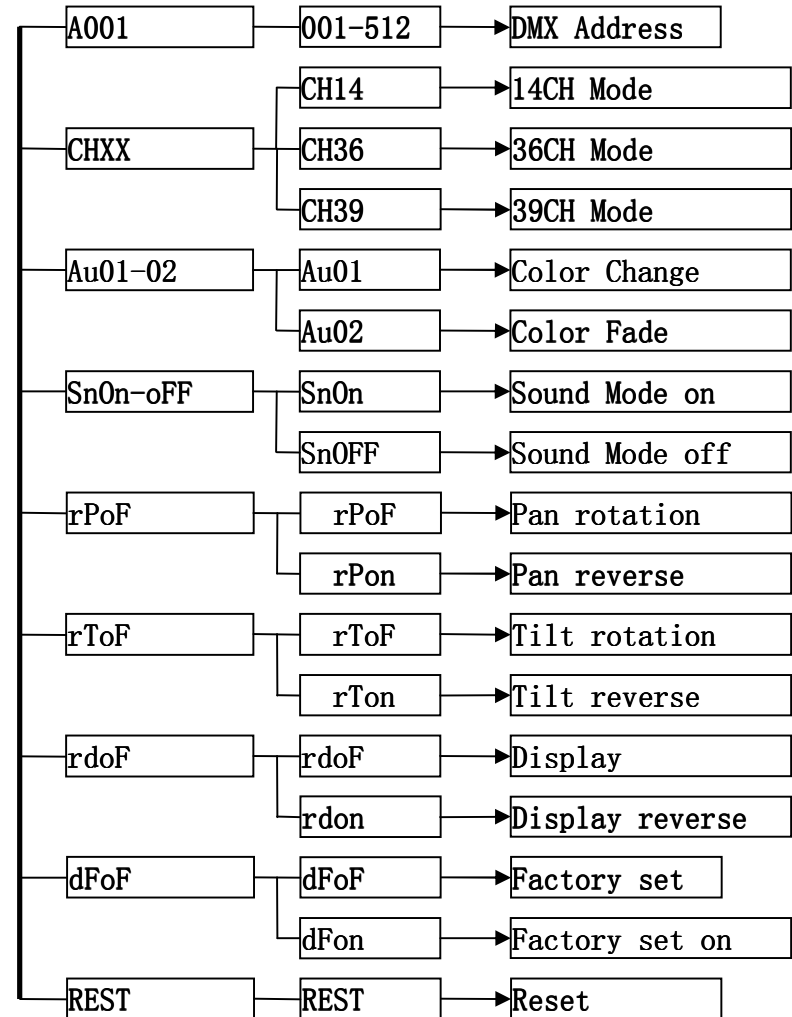

● DMX mode

14CH

Channel		Function	
1	0-255	Pan	
2	0-255	Pan Fine	
3	0-255	Tilt	
4	0-255	Tilt Fine	
5	0-255	Pan/Tilt Speed	
6	0-255	Dimmer	
7	0-255	Strobe	
8	0-255	Red	
9	0-255	Green	
10	0-255	Blue	
11	0-255	White	
12	0-255	Built-in programs	
13	0-255	Speed of built-in programs	
14	150-200	Reset	

36CH

Channel		Function	
1	0-255	BAR1	Pan
2	0-255	BAR1	Tilt
3	0-255	BAR1	Pan/Tilt Speed
4	0-255	BAR1	Dimmer
5	0-255	BAR1	Strobe
6	0-255	BAR1	Red
7	0-255	BAR1	Green
8	0-255	BAR1	Blue
9	0-255	BAR1	White
10	0-255	BAR2	Pan
11	0-255	BAR2	Tilt
12	0-255	BAR2	Pan/Tilt Speed
13	0-255	BAR2	Dimmer
14	0-255	BAR2	Strobe
15	0-255	BAR2	Red
16	0-255	BAR2	Green

17	0-255	BAR2	Blue
18	0-255	BAR2	White
19	0-255	BAR3	Pan
20	0-255	BAR3	Tilt
21	0-255	BAR3	Pan/Tilt Speed
22	0-255	BAR3	Dimmer
23	0-255	BAR3	Strobe
24	0-255	BAR3	Red
25	0-255	BAR3	Green
26	0-255	BAR3	Blue
27	0-255	BAR3	White
28	0-255	BAR4	Pan
29	0-255	BAR4	Tilt
30	0-255	BAR4	Pan/Tilt Speed
31	0-255	BAR4	Dimmer
32	0-255	BAR4	Strobe
33	0-255	BAR4	Red
34	0-255	BAR4	Green
35	0-255	BAR4	Blue
36	0-255	BAR4	White

39CH

Channel		Function	
1	0-255	BAR1	Pan
2	0-255	BAR1	Pan Fine
3	0-255	BAR1	Tilt
4	0-255	BAR1	Tilt Fine
5	0-255	BAR1	Pan/Tilt Speed
6	0-255	BAR1-4	Dimmer
7	0-255	BAR1-4	Strobe
8	0-255	BAR1	Red
9	0-255	BAR1	Green
10	0-255	BAR1	Blue
11	0-255	BAR1	White
12	0-255	BAR2	Pan