



18

广州市皓腾灯光有限公司

Idealight Industrial Co., Limited

2024

科技
Technology





愉悦
Joy

环保
Environmental protection

目录

Contents

防水摇头灯/Outdoor moving head	1-11
摇头灯/Moving head	12-14
LED摇头灯/LED moving head	15-27
LED帕灯/LED par light	28-34
多功能会议灯/Multi functional conference light	35-37
LED频闪灯/LED strobe light	38-41
染色灯/LED wash light	42-46
观众灯/LED blinder	47-48
LED效果灯/LED effect light	49-52
追光灯/Follow spot	53-54
激光灯/Laser light	55-57
舞台特效灯/Stage special effect lights	58-61
效果设备/Effect machine	62-64
控台/Controller	65-67

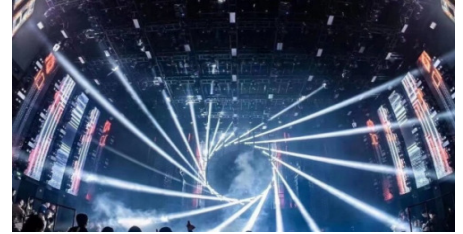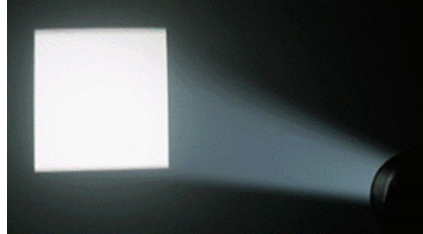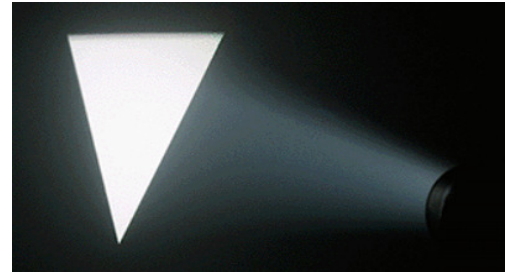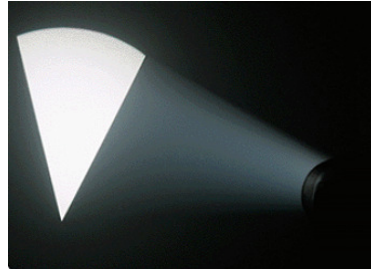

HT-LM-1400Profile IP
1400W防水摇头切割灯
1400W Waterproof moving head profile light

中文参数

电气参数

输入电压: AC100-240V, 50/60Hz

整灯功率: 1550W

光源

光源类型: 1400W白光LED模组

平均寿命: >20000小时

色彩系统

1个颜色盘: 8个颜色片+空白; 带双向旋转的彩虹效果

CMY无极线性混色+CTO无极线性色温调节 (6000K-2800K)

图案系统

1个固定图案盘: 6个金属图案+一段局部动感纹理+空白; 带图案抖动功能

1个旋转图案盘: 7个插拔式的旋转图案片+空白; 带图案抖动和任意定位功能

效果

变焦及调焦: 10倍电子线性变焦5°-50°, 调焦距离2米到无限远

1个切割盘: 一组由4个独立运动的切割片组成的光斑切割系统, 整个切割系统可做100°旋转

光圈: 5%-100%线性调整

1个棱镜盘: 1个双向旋转8棱镜

雾化: 一个独立柔光片

调光及频闪: 0-100%线性电子调光; 快速电子频闪

显示与控制

显示屏与主控: LCD显示屏, 支持中英文切换; 可查询灯具信息;

通道: 标准39通道/精简34通道

DMX协议信号及连接: USITT DMX 512; 3芯 XLR 输入和输出

控制: RDM功能; 通过DMX信号接口对灯具升级

智能散热: 温度传感检测, 风扇转速和光源工作温度互相跟踪自动调节。

扫描

水平扫描: 540°(16 bit解析度)

垂直扫描: 245°(16 bit解析度)

自动纠错: 具有电磁感应自动纠错复位功能

吊挂方式: 一体化折叠灯钩

尺寸重量与防护等级

产品尺寸: 412x330x754mm

净重: 31kg

防护等级: IP65

Product features

POWER SUPPLY

Voltage: AC 100~240V 50/60Hz

Power: 1550W

LIGHT SOURCE

High power 1400W LED

Lifespan: over 20,000 hours

COLOR

Color: One 8-color wheel + blank, with bidirectional rotation rainbow effect;

CMY infinite color mixing + CTO color temperature adjust (6800K-2800K)

GOBO

Static Gobo: 6 metal gobos + animation + blank, gobo with shaking effect

Rotating Gobo: 7 interchangeable gobos + blank; with the effect of positioning and shaking

EFFECT

Zoom: electronic linear zoom 5°-50°, distance from 2m to infinity;

Framing system: 4 blades that move separately, 90° rotation of the entire system

Iris: 5%-100% linear adjustment

Prism: 8-facet prism, clockwise and counter-clockwise

Frost: An independent frost

Dimmer & Strobe: 0-100% linear electronic dimmer, fast electronic strobe

CONTROL & PROGRAMMING

Display: LCD display screen, support both Chinese and English

DMX Channels: 39CH / 34CH

DMX Signal: USITT DMX 512, 3-pin input & output

Control: Support RDM addressing;

Intelligent temperature control to ensure LED lifespan

MOVEMENT

Pan: 540° 16 Bit

Tilt: 245° 16 Bit

Automatically error correction and reset system

SIZE & WEIGHT & IP Rating

Size: 412L x 330W x 754H(mm)

Net weight: 31.00kgs

IP65



HT-LM-600BSW IP

600W防水光束图案柔光三合一摇头灯

600W Waterproof LED moving head beam spot wash 3in1



中文参数

电气参数

输入电压: AC100-240V, 50/60Hz

整灯功率: 600W

光源

光源类型: 500W白光LED模组

平均寿命: >20000小时

色彩系统

1个颜色盘: 10个颜色片

CMY无极线性混色+CTO无极线性色温调节 (6800K-2800K)

图案系统

1个固定图案盘: 9个金属图案

1个旋转图案盘: 7个插拔式的旋转图案片; 有图案定位、双向旋转、图案流水和抖动效果

效果

变焦及调焦: 电子线性变焦3°-30°

光圈: 5%-100%线性调整

1个棱镜盘: 1个双向旋转3棱镜

1个独立柔光镜

调光及频闪: 0-100%线性电子调光; 快速电子频闪

标准模式: 24CH通道, 精简模式: 21CH通道。

DMX协议信号: USITT DMX 512, Art-Net / RDM, 无线DMX512

DMX 信号连接: 3芯 XLR 输入和输出。

Pan/Tilt 解析度: 16 bit。

Dimmer 解析度: 16 bit

显示与控制

显示屏与主控: LCD显示屏, 支持中英文切换; 可查询灯具信息;

控制: RDM功能; 通过DMX信号接口对灯具升级

智能散热: 温度传感检测, 风扇转速和光源工作温度互相跟踪自动调节。

扫描

水平扫描: 540°(16 bit解析度)

垂直扫描: 245°(16 bit解析度)

自动纠错: 具有电磁感应自动纠错复位功能

防护等级: IP65

Product features

Electrical parameters

Input voltage: AC100-240V, 50/60Hz

Power consumption: 600W

light source

Light source type: 500W white LED module

Average lifespan:>20000 hours

color system

1 color palette: 10 colors

CMY color mixing+CTO color temperature adjustment (6800K-2800K)

Pattern system

1 static gobo wheel: 9 metal goboes

1 rotating gobo wheel: 7 rotating goboes

Zoom and Focusing: Electronic Linear Zoom 3 ° -30 °

Aperture: 5% -100% linear adjustment

1 prism disc: 1 bidirectional rotating 3 prism

1 independent soft light mirror

Dimming and flicker: 0-100% linear electronic dimming; Fast electronic strobe

Standard mode: 24CH channel, simplified mode: 21CH channel.

DMX protocol signal: USITT DMX 512, Art-Net / RDM, Wireless DMX512

DMX signal connection: 3-core XLR input and output.

Pan/Tilt resolution: 16 bit Dimmer resolution: 16 bit

Displays and Controls

Display screen and main control: LCD display screen

Control: RDM function; Upgrading lighting fixtures through the DMX signal interface

Intelligent cooling: temperature sensing detection, fan speed and light source working temperature tracking and automatic adjustment.

scan

Horizontal scan: 540 ° (16 bit resolution)

Vertical scan: 245 ° (16 bit resolution)

Automatic error correction: with electromagnetic induction automatic error correction reset function

Protection level: IP65



HT-350BeamIP

350W防水摇头光束灯

350W Waterproof moving head beam




中文参数

- 1.电压: AC110-240V/50-60HZ
- 2.灯泡: OSRAM 350W灯泡 / YODN 350W灯泡
- 3.消耗功率: 500W
- 4.透镜: 3片透镜式镜头组
- 5.光束角度: 2°
- 6.运行方式: DMX, 主副机, 自走
- 7.DMX 512控制通道: 16通道/20通道
8. 高档触摸彩色液晶显示屏
9. 水平角度: 540degree (16bit); 垂直角度: 270degree (16bit)
10. 颜色盘: 13种颜色+白光
11. 图案盘: 13种图案+白光, 带图案流水和图案抖动效果
12. 棱镜: 可自转8+16+24蜂窝棱镜
13. 线性调焦0-100%
14. 线性雾化及七彩/高显指片可选
15. 调光(0%-100%)
16. 双频闪片频闪0-20次/秒
- 17.产品尺寸: 370*300*680mm 包装尺寸: 550*440*680mm
- 18.净重: 23kg 毛重: 27KG
- 19.IP65

Product features

- 1.Voltage: AC110-240V/50-60HZ
- 2.Lamp: OSRAM 350W lamp / YODN 350W lamp
- 3.Power consumption: 500W
4. Lens: high precision optical lens group
5. Beam angle: parallel beam angel 2 degree
6. Operation mode: DMX512, Master/ slave, Auto
7. DMX512 channels: 16CHS/20CHS
8. High grade color touch LCD display
9. Pan/Tilt: 540degree/270degree, automatically accurate positioning
10. Color Wheel 1: 13colors + open
11. Gobo Wheel: 13gobos + open, gobo shaking effect
12. Prism: 8+16+24 facet honeycomb prism rotation in both directions at different speeds
- 13.Focus: linear adjustment
14. Wash effect & Rainbow effect
15. Dimmer: 0-100% linear adjustment
16. Strobe: Double plates strobe (0 -20 times/ second)
17. Product Size: 370*300*680mm Packing size: 550*440*680mm
18. Net Weight: 23KG Gross Weight: 27KG
- 19.IP65

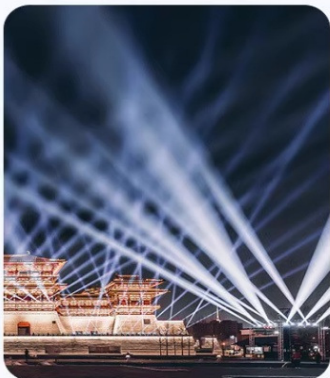


时代建筑
TIMES ARCHITECTURE



江边美景
RIVERSIDE BEAUTY



舞台演出
STAGE PERFORMANCE

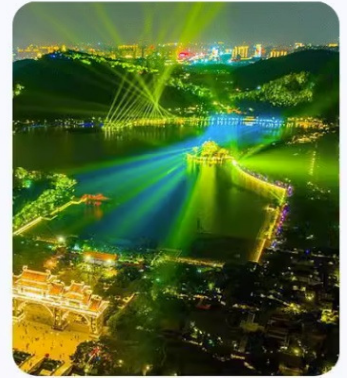


户外公园
OUTDOOR PARK



HT-380BeamIP

380W防水摇头光束灯

380W Waterproof moving head beam

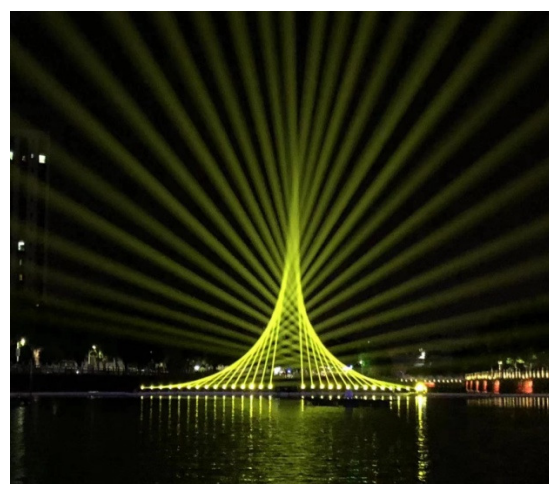

中文参数

- 1.电压：宽电压110V-240V, 50-60Hz
- 2.光源：Osram 371W / PHILIPS MSD SILVER 380W / YODN 380W,电子镇流器，长寿命3000小时
- 3.消耗功率：550W
- 4.采用高密度玻璃光学镜头
- 5.光束角度:1.8°
- 6.控制方式:DMX 512，自走，主从机自走
- 7.通道：16个/20个国际标准DMX512通道
- 8.水平/垂直：防水灯的灯具可做540°水平或270°垂直扫描，速度快而平稳，智能化光电复位修正系统.
- 9.颜色：颜色盘：13+1+七彩彩虹效果+雾化功能
- 10.图案：图案盘：13固定图案+1白光
- 11.棱镜：8棱镜,16+24棱镜叠加可旋转，宏功能
- 12.调焦：电子线性高清动调焦
- 13.雾化
- 14.线性的调光曲线：0%-100%线性调光
- 15.频闪:双片式频闪
- 16.显示屏：LCD 显示屏适应不同的安装位置
- 17.净重：27Kg 外形尺寸：424*367*725mm
- 18.毛重：33.3KG 包装尺寸：601*530*735mm
- 19.防水等级：IP65


Product features

- 1.Voltage: AC110-240V/50-60HZ
- 2.Lamp: Osram 371W / PHILIPS MSD SILVER 380W / YODN 380W, Electronic Ballast, average lifetime 3000hours
- 3.Power consumption: 550W
4. Lens: high precision optical lens group
5. Zoom: parallel beam angel 1.8 degree
6. Operation mode: DMX512, Master/ slave, Auto
7. DMX512 channels: 16CHS/20CHS
8. Pan/Tilt: 540degree/270degree, automatically accurate positioning
9. Color Wheel: 13colors + open, rainbow effect
10. Gobo Wheel: 13gobos + open, gobo shaking effect
11. Prism: 8-facet circular prism, 16+24 honeycomb prism with overlying
12. Focus: linear adjustment
13. Wash effect
14. Dimmer: 0-100% linear adjustment
15. Strobe: Double plates strobe (0-20 times/ second)
16. color touch display
17. N.W: 27Kg Product Size: 424*367*725mm
18. G.W: 33.3KG Packing Size: 601*530*735mm
- 19.IP rating: IP65

颜色盘/Color wheel:



图案盘/Gobo wheel:

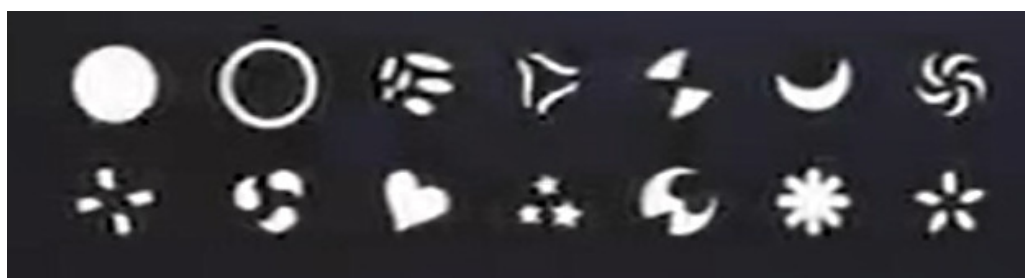



HT-420Beam IP

420W防水摇头光束灯


420W Waterproof moving head beam

中文参数

1. 宽电压: AC90V-235V 50-60Hz
2. 消耗功率: 600W
3. 光源系统: 420 (飞利浦)
4. 色温: 7900±500K
5. 颜色系统: 颜色盘: 14+七彩彩虹效果+雾化功能
6. 图案系统: 图案盘: 13固定图案+1 白光
7. 调焦系统: 电子调焦
8. 雾化: 具有雾化功能、可实现柔光效果
9. 棱镜: 8+16棱镜, 双棱镜自转, 速度可调。
10. 电机: XY轴使用三相电机, 使灯具快慢速度稳定性高, 定位角度准!
11. 调光曲线: 0%-100%线性调光、平滑无闪烁
12. 光束角度: 0-2°
13. 双通道: 16通道或20通道
14. 透镜直径: 180mm
15. 防水等级: IP66
16. 控制方式1: DMX 512
17. 显示屏: LCD 显示屏、适应不同的安装位置、可旋转180°
18. 水平垂直: 采用高精度三相电机、定位准确、运行平滑、可自动校正定位
19. 水平: 540°旋转、解析度8/16Bit、具有微调
20. 垂直: 270°旋转、解析度8/16Bit、具有微调。
21. 外壳: 全压铸铝。
22. 灯体尺寸: 695*390*326mm
23. 净重: 26KG

Product features

1. Wide voltage: AC90V-235V 50-60Hz
2. Power consumption: 600W
3. Light source system: 420 (Philips)
4. Color temperature: 7900±500K
5. Color system: Color wheel: 14+rainbow effect+atomization function
6. Gobo system: Gobo wheel: 13 static goboes+open
7. Focusing system: electronic focusing
8. Atomization: With atomization function, it can achieve wash effect
9. Prism: 8+16 prism, dual prism rotation, adjustable speed.
10. Motor: The XY axis uses a three-phase motor, which ensures high speed stability and accurate positioning angle!
11. Dimming curve: 0% -100% linear dimming, smooth without flicker
12. Beam angle: 0-2°
13. Dual channel: 16 channel or 20 channel
14. Lens diameter: 180mm
15. Waterproof grade: IP66
16. Control mode 1: DMX 512
17. Display screen: LCD display screen, adaptable to different installation positions, rotatable 180 °
18. Horizontal and Vertical: Using high-precision three-phase motors, accurate positioning, smooth operation, and automatic correction of positioning
19. Horizontal: 540 ° rotation, resolution 8/16 bit, with fine tuning
20. Vertical: 270 ° rotation, resolution 8/16 bit, with fine tuning.
21. Shell: Fully die cast aluminum.
22. Lamp body size: 695 * 390 * 326mm
23. Net weight: 26KG

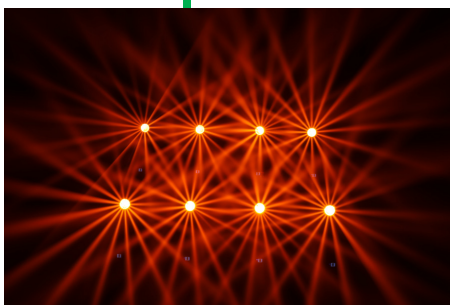



HT-480BeamIP

480W防水摇头光束灯

480W Waterproof moving head beam




中文参数

- 1.电压：宽电压110V-240V, 50-60Hz
- 2.光源：Osram 461W,电子镇流器
- 3.消耗功率：700W
- 4.采用高密度玻璃光学镜头，直径185mm
- 5.光束角度：2°
- 6.控制方式:DMX 512，主从机，自走
- 7.通道：16个/20个国际标准DMX512通道
- 8.显示屏：LCD 显示屏适应不同的安装位置
- 9.水平/垂直：防水灯的灯具可做540°水平或270°垂直扫描，速度快而平稳，智能化光电复位修正系统.
- 10.颜色：颜色盘：13+1 白光
- 11.图案：图案盘：13 固定图案+1 白光
- 12.棱镜1：8棱镜叠加可旋转，宏功能
棱镜2：8+16+24蜂窝棱镜叠加可旋转，宏功能
- 13.调焦：电子线性高清动调焦
- 14.七彩彩虹效果+雾化功能
- 15.线性的调光曲线：0%-100%线性调光
- 16.频闪:双片式频闪
- 17.外形尺寸：420*380*720mm
包装尺寸：600*500*850mm
- 18.净重：32Kg 毛重：36KG
- 19.防水等级：IP65


Product features

- 1.Voltage: AC110-240V/50-60HZ
- 2.Lamp: OSRAM 461W lamp
- 3.Power consumption: 700W
4. Lens: high precision optical lens group, 185mm diameter
5. Beam angle: parallel beam angel 2 degree
6. Operation mode: DMX512, Master/ slave, Auto
7. DMX512 channels: 16CHS/20CHS
8. High grade color touch LCD display
9. Pan/Tilt: 540degree/270degree, automatically accurate positioning
10. Color Wheel 1: 13colors + open
11. Gobo Wheel: 13gobos + open, gobo shaking effect
12. Prism 1: 8-facet circular prism rotation in both directions at different speeds
Prism 2: 8+16+24 facet honeycomb prism rotation in both directions at different speeds
with prism overlying
- 13.Focus: linear adjustment
14. Wash effect & Rainbow effect
15. Dimmer: 0-100% linear adjustment
16. Strobe: Double plates strobe (0 -20 times/ second)
17. Product Size: 420*380*720mm Packing size: 600*500*850mm
18. Net Weight: 32KG Gross Weight: 36KG
- 19.IP65

颜色盘/Color wheel:

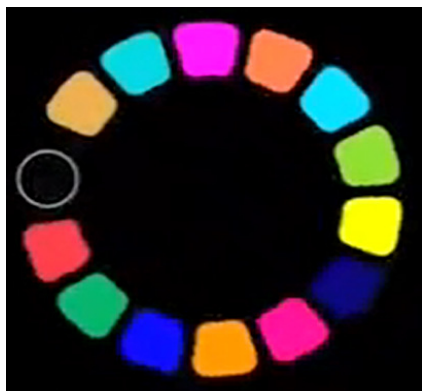

图案盘/Gobo wheel:

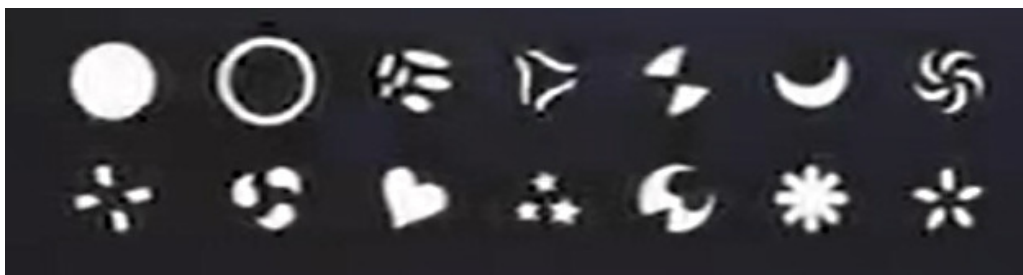



HT-380BSW IP

380W防水摇头三合一灯


380W Waterproof moving head beam spot wash 3in1

中文参数

- 1.电压：宽电压110V-240V, 50-60Hz
- 2.光源：Osram / PHILIPS 380W,电子镇流器
- 3.消耗功率：450W
- 4.采用高密度玻璃光学镜头
- 5.光束角度:2.8°~38°
- 6.控制方式:DMX 512，主从机，自走
- 7.通道：17个国际标准DMX512通道
- 8.显示屏：LCD 显示屏适应不同的安装位置
- 9.水平/垂直：防水灯的灯具可做540°水平或270°垂直扫描，速度快而平稳，智能化光电复位修正系统。
- 10.颜色：颜色盘：13+1白光
- 11.图案：图案盘1：14 固定图案+1 白光
图案盘2：8 固定图案+1 白光
- 12.棱镜：8棱镜叠加可旋转，宏功能
- 13.调焦：电子线性高清动调焦
- 14.七彩彩虹效果+雾化功能
- 15.线性的调光曲线：0%-100%线性调光
- 16.频闪:双片式频闪
- 17.外形尺寸：370*300*680mm
- 18.净重：23Kg
- 19.防水等级：IP65

Product features

- 1.Voltage: AC110-240V/50-60HZ
- 2.Lamp: OSRAM / Philips 380W lamp
- 3.Power consumption: 450W
4. Lens: high precision optical lens group
5. Beam angle: parallel beam angel 2.8~38° degree
6. Operation mode: DMX512, Master/ slave, Auto
7. DMX512 channels: 17CHS
8. High grade color touch LCD display
9. Pan/Tilt: 540degree/270degree, automatically accurate positioning
10. Color Wheel 1: 13colors + open
11. Gobo Wheel: 14gobos + open, gobo shaking effect
Gobo Wheel 2: 8gobos + open, gobo srotation
12. Prism: 8-facet circular prism rotation in both directions at different speeds
- 13.Focus: linear adjustment
14. Wash effect & Rainbow effect
15. Dimmer: 0-100% linear adjustment
16. Strobe: Double plates strobe (0 -25 times/ second)
17. Product Size: 370*300*680mm
18. Net Weight: 23KG
19. IP Rating: IP65

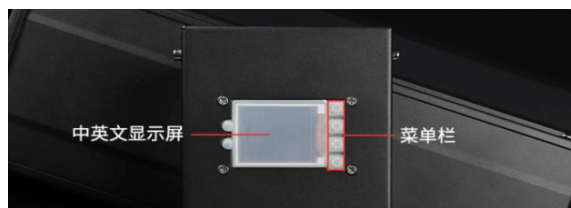



HT-420BSW IP

420W防水摇头三合一灯

420W Waterproof moving head beam spot wash 3in1



中文参数

1. 宽电压: AC90V-235V 50-60Hz
2. 消耗功率: 600W
3. 光源系统: 420 (飞利浦)
4. 色温: 7900±500K
5. 颜色系统: 颜色盘: 14颜色+雾化功能
6. 图案系统: 图案盘: 15固定图案+8旋转玻璃图案+1 白光
7. 调焦系统: 电子调焦
8. 雾化: 具有雾化功能、可实现柔光效果
9. 频闪: 独立频闪效果, 0.5-20次/秒, 速度可调
10. 棱镜: 8棱镜: 棱镜自转可调速
11. 电机: XY轴使用三相电机, 使灯具快慢速度稳定性高, 定位角度准!
12. 调光曲线: 0%-100%线性调光、平滑无闪烁
13. 光束角度: 0-45°
14. 双通道: 16通道或18通道
15. 透镜直径: 152mm
16. 防水等级: IP65
17. 控制方式: 1:DMX 512
18. 显示屏: LCD 显示屏、适应不同的安装位置、可旋转180°
19. 水平垂直: 采用高精度三相电机、定位准确、运行平滑、可自动校正定位
20. 水平: 540°旋转、解析度8/16Bit、具有微调
21. 垂直: 270°旋转、解析度8/16Bit、具有微调。
22. 外壳: 全压铸铝。
23. 灯体尺寸: 695*390*326mm
24. 净重: 26KG

Product features

1. Wide voltage: AC90V-235V 50-60Hz
2. Power consumption: 600W
3. Light source system: 420 (Philips)
4. Color temperature: 7900±500K
5. Color system: Color palette: 14 colors+atomization function
6. Pattern system: Pattern disk: 15 fixed patterns+8 rotating glass patterns+1 white light
7. Focusing system: electronic focusing
8. Atomization: With atomization function, it can achieve soft light effect
9. Strobe: Independent strobe effect, 0.5-20 times/second, adjustable speed
10. Prism: 8 Prism: Prism rotation adjustable speed
11. Motor: The XY axis uses a three-phase motor, which ensures high speed stability and accurate positioning angle of the lamp!
12. Dimming curve: 0% -100% linear dimming, smooth without flicker
13. Beam angle: 0-45 °
14. Dual channel: 16 channel or 18 channel
15. Lens diameter: 152mm
16. Waterproof grade: IP65
17. Control mode 1: DMX 512
18. Display screen: LCD display screen, adaptable to different installation positions, rotatable 180 °
19. Horizontal and Vertical: Using high-precision three-phase motors, accurate positioning, smooth operation, and automatic correction of positioning
20. Horizontal: 540 ° rotation, resolution 8/16 bit, with fine tuning
21. Vertical: 270 ° rotation, resolution 8/16 bit, with fine tuning.
22. Shell: Fully die cast aluminum.
23. Lamp body size: 695 * 390 * 326mm
24. Net weight: 26KG



HT-480BSW IP

480W防水摇头三合一灯

480W Waterproof moving head beam spot wash 3in1




中文参数

- 1.电压：宽电压110V-240V, 50-60Hz
- 2.光源：Osram 371W / PHILIPS MSD SILVER 380W / YODN 380W,电子镇流器，长寿命3000小时
- 3.消耗功率：550W
- 4.采用高密度玻璃光学镜头
- 5.光束角度:1.8°
- 6.控制方式:DMX 512，自走，主从机自走
- 7.通道：16个/20个国际标准DMX512通道
- 8.水平/垂直：防水灯的灯具可做540°水平或270°垂直扫描，速度快而平稳，智能化光电复位修正系统.
- 9.颜色：颜色盘：13+1+七彩彩虹效果+雾化功能
- 10.图案：图案盘：13固定图案+1白光
- 11.棱镜：8棱镜叠加可旋转，宏功能
- 12.调焦：电子线性高清调焦
- 13.雾化
- 14.线性的调光曲线：0%-100%线性调光
- 15.频闪:双片式频闪
- 16.显示屏：LCD 显示屏适应不同的安装位置
- 17.净重：27Kg 外形尺寸：424*367*725mm
- 18.毛重：33.3KG 包装尺寸：601*530*735mm
- 19.防水等级：IP65


Product features

- 1.Voltage: AC110-240V/50-60HZ
- 2.Lamp: Osram 371W / PHILIPS MSD SILVER 380W / YODN 380W, Electronic Ballast, average lifetime 3000hours
- 3.Power consumption: 550W
4. Lens: high precision optical lens group
5. Zoom: parallel beam angel 1.8 degree
6. Operation mode: DMX512, Master/ slave, Auto
7. DMX512 channels: 16CHS/20CHS
8. Pan/Tilt: 540degree/270degree, automatically accurate positioning
9. Color Wheel: 13colors + open, rainbow effect
10. Gobo Wheel: 13gobos + open, gobo shaking effect
11. Prism: 8-facet circular prism
12. Focus: linear adjustment
13. Wash effect
14. Dimmer: 0-100% linear adjustment
15. Strobe: Double plates strobe (0-20 times/ second)
16. color touch display
17. N.W: 27Kg Product Size: 424*367*725mm
18. G.W: 33.3KG Packing Size: 601*530*735mm
- 19.IP rating: IP65

颜色盘/Color wheel:

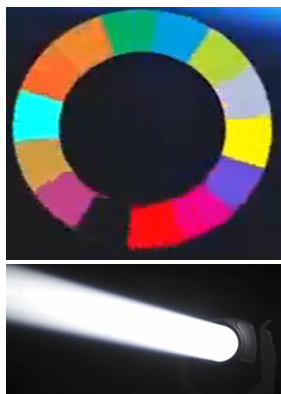

图案盘/Gobo wheel:

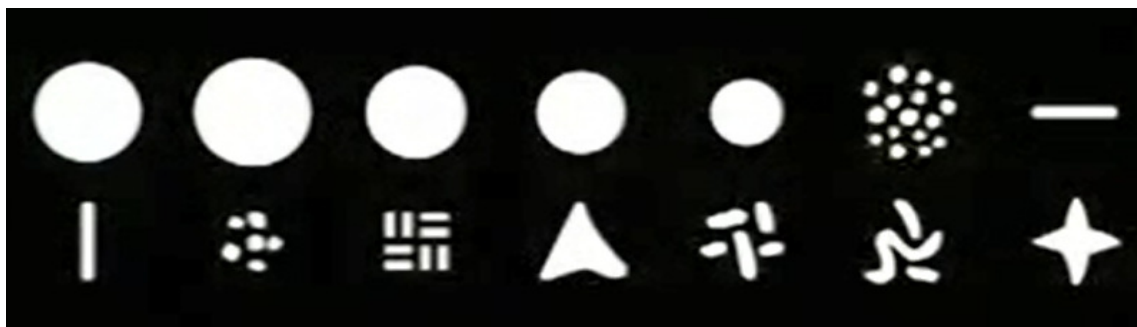



HT-LM-760 IP
7X60W防水摇头染色灯

7X60W Waterproof LED moving head wash with ZOOM

中文参数

1. 电源: AC100V-240V 50-60Hz
2. 总功率: 500W
3. 光源: 7颗60W欧司朗四合一灯珠
4. 色温: 2800K-10000K
5. 灯珠寿命: 50000 hours
6. 光斑角度: 4.5°-45°
7. 控制方式: DMX512、声控、自走
8. 通道模式: 23CH/35CH/51CH
9. 液晶显示屏, 中、英文显示, 可倒转显示
10. X轴: 540度, Y轴: 270度, 16位微调
11. 频闪: 1-25Hz调光: 0-100% (16bit) 出色调光无闪烁
12. 支持RDM功能, 多种颜色变化效果, 内置多种蜂窝效果, 万花筒, 线性色温调节
13. 高效智能散热系统, 全程温度监测, 过温自动调节保护, 无灯珠损坏风险, 智能控制风机风速
14. 防水等级: IP65

Product features

1. Power supply: AC100V-240V 50-60Hz
2. Total power: 500W
3. Light source: 7X60W Osram four in one LEDs
4. Color temperature: 2800K-10000K
5. LED lifespan: 50000 hours
6. Spot angle: 4.5 ° -45 °
7. Control mode: DMX512, Sound, Auto
8. Channel mode: 23CH/35CH/51CH
9. LCD screen, displaying in both Chinese and English, reversible display
10. X axis: 540 degrees, Y axis: 270 degrees, 16 bit fine adjustment
11. Strobe: 1-25Hz Dimming: 0-100% (16 bit) Excellent dimming without flicker
12. Supports RDM function, multiple color change effects, built-in multiple honeycomb effects, kaleidoscope, linear color temperature adjustment
13. Efficient intelligent cooling system, temperature monitoring throughout the process, automatic over temperature adjustment protection, no risk of led damage, intelligent control of fan speed
14. Waterproof grade: IP65



HT-LM-1940 IP
19X40W防水摇头染色灯

19X40W Waterproof LED moving head wash with ZOOM

中文参数

1. 输入电压: 100V-240V, 50/60 Hz
2. 总功率: 640瓦
3. 光源: 19颗40W RGBW 4in1 LEDs
4. 灯珠寿命: ≥50000小时
5. 调焦角度: 3.5°—50°
6. 控制模式: DMX 512/自走/声控/RDM
7. DMX 512通道: 21/23/35/78/92/97/99通道
8. 显示屏: 1.8寸TFT彩色液晶显示屏, 180度可旋转, 中英文可切换
9. 电源插座: 防水PowerCon输入+输出
10. 信号输入/输出: 防水三芯XLR输入/输出
11. 外观材质: 压铸铝
12. 水平扫描: 540° (16bit精准扫描); 垂直扫描: 270° (16bit精准扫描)
13. 效果: 每颗LED灯珠可单独控制, 奇幻蜂眼花效果带调焦、染色、光束、图像、效果模式
14. 防护等级: IP65
15. 产品尺寸: 435*278*528mm
16. 净重: 22kg
17. 纸箱包装: 56*42*64cm 毛重: 26kg
18. 航空箱包装: 80*49.5*72cm 一装二 毛重: 74kg

Product features

1. Voltage: 100V-240V, 50/60 Hz
2. Power Consumption: 640watts
3. Light source: 19x40W RGBW 4in1 LEDs
4. Led lifespan: ≥ 50000 hours
5. Focusing angle: 3.5 ° -50 °
6. Control mode: DMX 512/Auto/Sound/RDM
7. DMX 512 channels: 21/23/35/78/92/97/99 channels
8. Display screen: 1.8-inch TFT color LCD display screen, 180 degree rotatable, switchable between Chinese and English
9. Power socket: Waterproof PowerCon input+output
10. Signal input/output: Waterproof three core XLR input/output
11. Appearance material: Die cast aluminum
12. Pan: 540 ° (16 bit fine); Tilt: 270 ° (16 bit fine)
13. Effect: Each LED can be individually controlled, and the fantasy bee eye effect includes focusing, coloring, beam, image, and effect modes
14. Protection level: IP65
15. Product size: 435*278*528mm
16. N.W: 22kg
17. Carton packaging: 560*420*640mm, G.W: 26kg
18. 2in1 Flight case packaging: 800*495*720mm, G.W: 74kg



HT-LM-1960 IP

19X60W防水摇头染色灯

19X60W Waterproof LED moving head wash



中文参数

电气参数

输入电压: AC100-240V, 50/60Hz

整灯功率: 1200W

光源

类型: 19颗60W RGBW 4合1 LED

平均寿命: >20000小时

色彩系统: RGBW混色系统

效果

LED: 9颗一组10颗一组, 圈控两组可独立控制

调光: 0-100% 电子线性调光, 调光效果相当平滑

频闪: 0-25Hz

放大: 电子线性调节光斑角度3.8°- 50°

显示与控制

显示屏与主控: LCD显示屏, 支持中英文切换; 可查询灯具信息;

标准模式: 17 通道, 精简模式: 19 通道

DMX协议信号及连接: USITT DMX 512; 3芯 XLR 输入和输出

控制: RDM功能; 通过DMX信号接口对灯具升级

智能散热: 温度传感检测, 风扇转速和光源工作温度互相跟踪自动调节。

扫描

水平扫描: 540°(16 bit解析度)

垂直扫描: 245°(16 bit解析度)

自动纠错: 具有电磁感应自动纠错复位功能

吊挂方式: 一体化折叠灯钩

尺寸重量与防护等级

产品尺寸: 359x264x480mm

净重: 13.5kg

防护等级: IP65

Product features

Electrical parameters

Input voltage: AC100-240V, 50/60Hz

Whole lamp power: 1200W

Light source

Type: 19*60W RGBW 4-in-1 LEDs

Average lifespan:>20000 hours

Color system: RGBW color mixing system

Effect

LED: 9 pieces per group, 10 pieces per group, circle control two groups can be independently controlled

Dimming: 0-100% electronic linear dimming, the dimming effect is quite smooth

Strobe: 0-25Hz

Magnification: Electronic linear adjustment of spot angle 3.8 ° -50 °

Display and Control

Display screen and main control: LCD display screen, supporting switching between Chinese and English; Can query information about lighting fixtures;

Standard mode: 17 channels, Simplified mode: 19 channels

DMX protocol signal and connection: USITT DMX 512; 3-core XLR input and output

Control: RDM function; Upgrading lighting fixtures through the DMX signal interface

Intelligent cooling: temperature sensing detection, fan speed and light source working temperature tracking and automatic adjustment.

Scanning

Horizontal scan: 540 ° (16 bit resolution)

Vertical scan: 245 ° (16 bit resolution)

Automatic error correction: with electromagnetic induction automatic error correction reset function


Hanging method: integrated folding light hook

Size, weight, and protection level


Product size: 359x264x480mm

Net weight: 13.5kg

Protection level: IP65

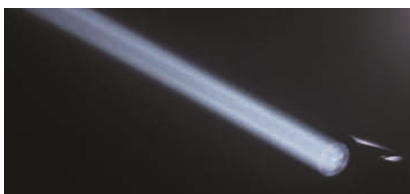

HT-280Beam
280W摇头光束灯
280W moving head beam

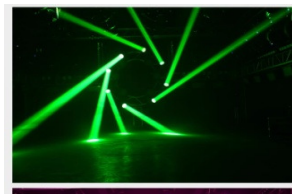

HT-320Beam
320W摇头光束灯
320W moving head beam

中文参数

- 1) 光源: PHILIP / OSRAM 280W / YODN 280W R10灯泡
- 2) 高质量光学透镜组合确保超强输出
- 3) 光束角度: 光束模式: 2.5度
- 4) 控制模式: DMX,主副机
- 5) DMX通道: 16通道
- 6) 全彩液晶显示屏
- 7) 颜色盘: 14种颜色+白光, 带半色效果和可调速颜色流水效果
- 8) 固定图案盘: 13种图案+白光, 带可调速图案流水效果
- 9) 可自转8棱镜 & 16棱镜
- 10) 电子调焦
- 11) 电子调光
- 12) 电子频闪
- 13) 电子雾化
- 14) X轴: 540度, Y轴: 270度, 三相电机带16位微调
- 15) X轴Y轴锁, 确保安全运输
- 16) 电压: AC100-240V,50/60HZ
- 17) 消耗功率: 400W
- 18) 灯具尺寸: 400 x 320 x 520 mm 包装尺寸: 435x420x555mm
- 19) 净重: 15kgs 毛重: 18.5kg

Product features


- 1.) Light Source : PHILIP / OSRAM 280W / YODN 280W R10 lamp
- 2.) High quality dichroic glass lens for powerful output
- 3.) Beam angle : 2.5 degree
- 4.) Control Mode – DMX, Master/Slave built-in programs
- 5.) DMX channels – 16Ch.
- 6.) full color LCD display for easy navigation
- 7.) Color wheel : 14 colors + white, split colors, continuous scroll at variable speeds
- 8.) Static gobo: 13 gobos + open
- 9.) Rotating prisms : 8 facet circular + 16 facet circular prisms
- 10.) Motorized focus
- 11.) Motorized dimming
- 12.) Motorized strobe 0~20Hz
- 13.) Motorized frost
- 14.) Pan : 540 degree; Tilt – 270 degree; 3-phase motors with 16 bit control
- 15.) Pin/ Tilt Lock for safe transportation
- 16.) Power: AC 100 ~240V, 50/60Hz
- 17.) Power consumption: 400W
- 18.) Product size : 336 x 242 x 460 mm Packing size: 435x420x555mm
- 19.) Net weight: 15kgs Gross weight: 18.5kg

中文参数


- 1.电压: AC110-240V, 50/60Hz
- 2.光源: 欧司朗311w铂金灯泡, 平均寿命4000小时, 色温7800K
- 3.消耗功率: 500W
- 4.透镜: 防反射镀膜玻璃透镜
- 5.光束角度: 2度
- 6.控制方式: 16个国际标准DMX512通道, 主从模式, 自走模式
- 7.颜色: 14种颜色+白光
- 8.固定图案: 13个固定图案+1白光
- 9.棱镜盘: 2个独立棱镜, 可自转8棱镜 & 8+16蜂窝棱镜
- 10.雾化: 单独雾化片
- 11.频闪: 0-13次/秒
- 12.调焦: 线性电子调焦
- 13.调光: 0-100%线性调节
- 14.X轴: 540度, Y轴: 270度, 16位微调
- 15.X轴Y轴锁, 确保安全运输
- 16.其他功能: 远程控制灯泡开关功能, 显示灯具、灯泡使用时间
- 17.外观: 耐高温材料+模压合金材料
- 18.产品尺寸: 331 x 258 x 530 mm
- 19.净重: 15.5kg

Product features

- 1.Power: AC 100 ~240V, 50/60Hz
- 2.Light Source : Osram SIRIUS HRI 311W, average life time 4000hours, color temperature 7800K
- 3.Power consumption: 500W
- 4.High quality dichroic glass lens for powerful output
- 5.Beam angle : 2 degree
- 6.Control Mode – DMX, Master/Slave built-in programs
- 7.DMX channels – 16Ch.
- 8.Color wheel : 13 colors + white, split colors, continuous scroll at variable speeds
- 9.Rotating prisms : 8 facet circular + 8+16 honeycomb prisms
10. Motorized frost
11. Motorized strobe 0~13Hz
12. Motorized focus
13. Motorized dimming
14. Pan : 540 degree; Tilt – 270 degree; 16 bit control
15. Pin/ Tilt Lock for safe transportation
16. Other functions: Remote lamp control, display lighting used hours and bulb usage time
17. Appearance: High temperature resistant material+molded alloy material
18. Product size : 331 x 258 x 530 mm
19. Net weight: 15.5kgs

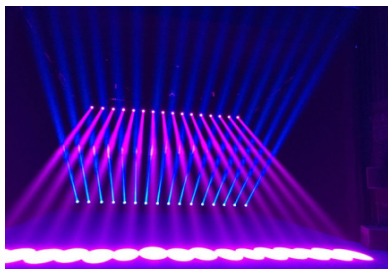

HT-380Beam
380W摇头光束灯
380W moving head beam

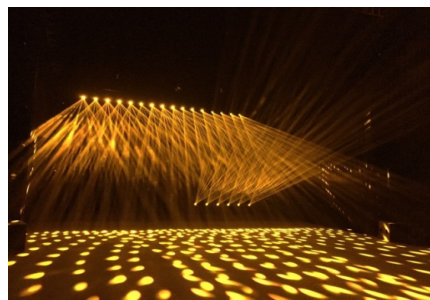

HT-380BSW
380W摇头三合一灯
380W moving head beam spot wash 3in1

中文参数

- 1.电压: AC110-240V/50-60HZ
- 2.灯泡: YODN R18或OSRAM 371W或PHILIP 380W
- 3.消耗功率: 600W
- 4.透镜: 3片透镜式镜头组
- 5.光束角度: 1.8°
- 6.运行方式: DMX, 主副机
- 7.DMX 512控制通道: 16通道
- 8.高档液晶显示屏
- 9.水平角度: 540degree (16bit)
- 10.垂直角度: 280degree (16bit)
- 11.颜色盘: 14种颜色+白光, 带彩虹效果和半色效果
- 12.图案盘: 13种图案+白光, 带图案流水和图案抖动效果
- 13.功能: 频闪(1-13次/秒), 雾化(0%-100%), 调焦, 可自转8棱镜和8+16蜂窝棱镜
- 14.产品尺寸: 405*330*475mm
- 15.净重: 17kg

Product features


- 1.Power: AC 100 ~240V, 50/60Hz
- 2.Light Source: YODN R18 / Osram SIRIUS HRI 371W / PHILIP 380W
- 3.Power consumption: 600W
- 4.High quality dichroic glass lens for powerful output
- 5.Beam angle : 1.8 degree
- 6.Control Mode – DMX, Master/Slave built-in programs
- 7.DMX channels – 16Ch.
- 8.Color wheel : 14 colors + white, split colors, continuous scroll at variable speeds
- 9.Static gobo: 13 gobos + open
- 10.Rotating prisms : 8 facet circular + 8+16 honeycomb prisms
11. Motorized focus
12. Motorized dimming
13. Motorized strobe 0~13Hz
14. Motorized frost
15. Pan : 540 degree; Tilt – 280 degree; 16 bit control
16. Pin/ Tilt Lock for safe transportation
17. Product size : 405*330*475mm
18. Net weight: 17kg

中文参数

1. 电压: AC110~240V/50-60HZ
2. 灯泡: PHILIPS/OSRAM 380W/ YODN 380W, 原装电子镇流器
3. 消耗功率: 600W
4. 透镜: 高精度光学镜头组
5. 光圈: 光圈大小可调, 光束角度2.5 – 45度
6. 运行模式: DMX512, 主副机, 自走
7. DMX512通道: 20CHS
8. X轴/Y轴: 540度/270度, 自带纠错功能
9. 颜色盘: 14种颜色 + 白光, 带颜色流水效果
10. 图案盘1: 12种图案 + 白光, 带图案流水和图案抖动效果
旋转图案盘2: 7种双向可索引图案片 + 白光, 带图案流水, 图案抖动和图案旋转效果
11. 棱镜盘1: 双向可旋转8棱镜, 旋转速度可调
棱镜盘2: 双向可旋转8+16棱镜, 旋转速度可调
棱镜可叠加
12. 调焦: 线性调焦
13. 雾化: 雾化角度不可调
14. 调光: 0-100%线性调光
15. 频闪: 双面频闪 (0.5-9 次/秒)
16. 产品尺寸: 315×255×585mm
17. 净重: 15.9KG

Product features

- 1.Voltage: AC110-240V/50-60HZ
- 2.Lamp: Osram 371W / PHILIPS MSD SILVER 380W / YODN 380W, Electronic Ballast, average lifetime 3000hours
- 3.Power consumption: 600W
4. Lens: high precision optical lens group
5. Zoom: parallel beam angel 2.5-45 degree
6. Operation mode: DMX512, Master/ slave, Auto
7. DMX512 channels: 20CHS
8. Pan/Tilt: 540degree/270degree, automatically accurate positioning
9. Color Wheel: 14colors + open, rainbow effect
10. Gobo Wheel 1: 12gobos + open, gobo shaking effect
Gobo Wheel 2: 7gobos + open, gobo shaking effect
11. Prism: 8-facet circular prism & 8+16 honeycomb prism
12. Focus: linear adjustment
13. Wash effect
14. Dimmer: 0-100% linear adjustment
15. Strobe: Double plates strobe (0-20 times/ second)
16. Product Size: 315*255*585mm
17. N.W: 15.9KG

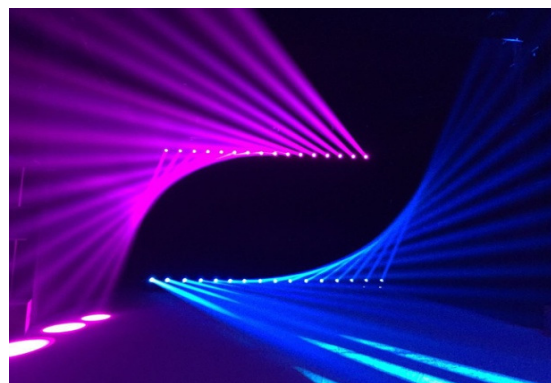

HT-440Beam
440W摇头光束灯
440W moving head beam

中文参数

- 1.电压: AC110-240V/50-60HZ
- 2.灯泡: PHILIPS 420W, 电子镇流器
- 3.消耗功率: 600W
- 4.透镜: 3片透镜式镜头组
- 5.光束角度: 2.5°-8°
- 6.运行方式: DMX, 主副机, 自走
- 7.DMX 512控制通道: 16通道
8. 水平角度: 540degree (16bit); 垂直角度: 270degree (16bit)
9. 颜色盘: 13种颜色+白光, 带彩虹效果和半色效果
10. 图案盘: 17种图案+白光, 带图案流水和图案抖动效果
11. 可自转8棱镜, 24棱镜, 棱镜可叠加
12. 线性调焦
13. 线性雾化及七彩效果
14. 调光(0%-100%)
15. 双频闪片频闪
16. 全彩触摸屏
- 17.产品尺寸: 362×350×513mm
- 18.净重: 23kg

颜色盘/Color wheel:






Product features

- 1.Voltage: AC110-240V/50-60HZ
- 2.Lamp: PHILIPS 420W, Electronic Ballast
- 3.Power consumption: 600W
4. Lens: high precision optical lens group
5. Zoom: parallel beam angel 2.5 - 8 degree
6. Operation mode: DMX512, Master/ slave, Auto
7. DMX512 channels: 16CHS
8. Pan/Tilt: 540degree/270degree, automatically accurate positioning
9. Color Wheel: 13colors + open, rainbow effect
10. Gobo Wheel: 17gobos + open, gobo shaking effect
11. Prism 1: 8-facet circular prism rotation in both directions at different speeds
Prism 2: 24-facet circular prism rotation in both directions at different speeds
with prism overlying
12. Focus: linear adjustment
13. Wash effect & Effect wheel
14. Dimmer: 0-100% linear adjustment
15. Strobe: Double plates strobe (0-12 times/ second)
16. Color touch display
17. Product Size: 362×350×513mm
18. Net Weight: 23KG

图案盘/Gobo wheel:



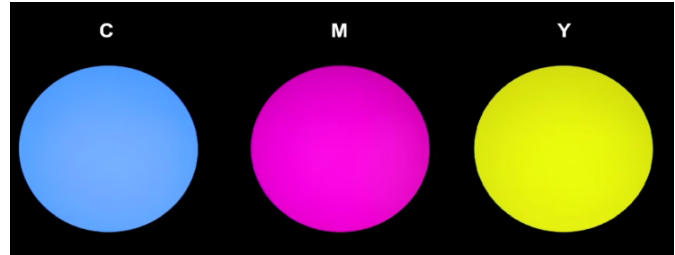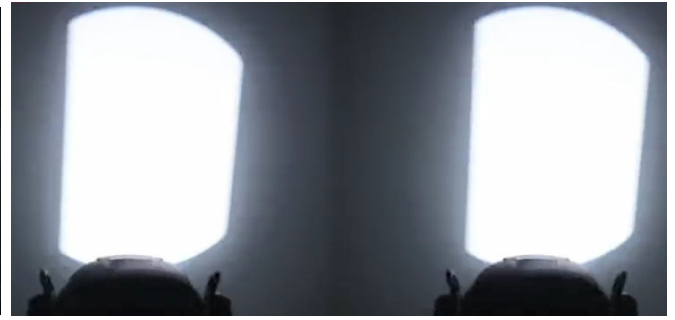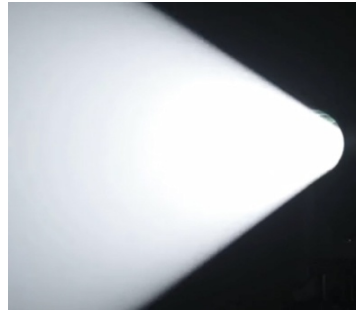

HT-LM-700Profile
700W LED摇头切割灯

700W LED moving head profile light

中文参数

电压：AC100~240V,50/60Hz
 输入功率：850W@220V
 光源：大功率700w白光 LED光源
 平均寿命：大于20000小时
 光源颜色：6500K
 色彩系统：1个带有6个颜色+白光的颜色轮，CMY无极混色，CTO色温校正（7400K-2800K）
 显色指数：具备可调显指模式
 图案盘：2个图案盘，其中一个带有7个金属图案的固定图案轮；另一个是带有可更换的6个玻璃图案的旋转图案盘，有图案定位、双向旋转、图案流水和抖动效果
 棱镜：1个旋转6排镜1个旋转3棱镜
 动感效果盘：超炫模拟动感窜动的火焰，潺潺流水等动态效果
 雾化：1个独立柔光镜
 切割盘：4片式全切割系统，切割盘可90度旋转
 频闪：电子频闪
 调光：0-100%线性调光，解析度16bit，调光效果特别的平滑
 光圈：5%~100%顺滑调整
 光束角度：电子线性变焦7°-42°
 控制模式：36CH通道
 DMX协议信号：USITDMX512
 DMX信号连接：3芯XLR输入和输出
 RDM模式：具备RDM功能，可实现在控台上直接播放地址码
 灯体结构：为了方便运输，灯体两侧都有提手；为了维护和运输，灯体带有PAN和TILT轴向锁，LCD显示，用户友好的界面，语言支持中文和英文
 旋转角度：PAN=540/630°，TILT=270°，解析度16bit
 电控技术：在非控台操作的情况下，如果被意外触碰而造成的跑位情况，灯具可以自动回复到原有位置
 散热系统：具备智能的风扇转速自适应功能，温度电子传感检测
 产品尺寸：495*345*800mm
 净重：42.5Kg

Product features

Voltage: AC100~240V,50/60Hz
 Power consumption: 850W@220V
 Light source: high power 700w white LED
 Average life span: 20000hours
 Color temperature: 6500K
 Color system: 1color wheel with 6colors+open, CMY + CTO (7400K-2800K) color mixing system
 CRI: with adjustable CRI filter
 Gobo wheel: 2gobo wheels, 1static gobo wheel with 7gobos; 1rotating gobo wheel with 6gobos. All with gobo index, gobo flow, gobo shake function.
 Prism: 1 rotating 6-liner prism + 1 rotating 3-facet prism
 Dynamic Effect Wheel: Superb simulation of dynamic effects such as moving flames and flowing water
 Forst: 1 independent frost lens
 Cutting wheel: 4-piece full cutting system, the cutting wheel can rotate 90 degrees
 Strobe: electronic strobe
 Dimmer: 0-100% liner dimmer, 16bit smooth dimmer
 Iris: 5%~100% smooth adjust
 Beam angle: 7°-42°
 DMX Channels: 36CH
 USITDMX512
 DMX: 3pin XLR IN/OUT
 RDM support
 Body structure: For convenient transportation, there are handles on both sides of the light body; For maintenance and transportation, the light body is equipped with PAN and TILT locks, LCD display, user-friendly interface, and language support for Chinese and English
 PAN=540/630°, TILT=270°, 16bit
 Cooling system: equipped with intelligent fan speed adaptive function and temperature sensor
 Product size: 495*345*800mm
 N.W: 42.5Kg




HT-LM-500BSW CMY

500W LED光束图案柔光三合一摇头灯带CMY
500W LED moving head beam spot wash with CMY



HT-LM-400BSW CMY

400W LED摇头光束图案柔光三合一
400W LED moving head beam spot wash 3in1

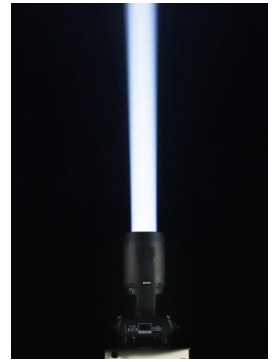

中文参数

1. 电源: AC110V-240V, 50-60Hz
2. 光源: LED500W模组灯珠, 光源色温: 7800K
3. 颜色: 8种颜色+白光+CTO, 可双向旋转彩虹效果
4. 混色: 独立CMY混色系统, 自由混色
5. 固图: 12个固图+白光
6. 旋转图案: 7个图案片+白光
7. 调焦放大: 4-40° 线性平滑放大调焦
8. 棱镜: 8棱镜+6排镜, 可叠加效果正反向旋转
9. 控制: 国际通用DMX512, 带RDM功能
10. 通道: 标准20CH/24CH
11. 散热: 灯珠铜管散热, 轴流式风机进出双向排热冷却
12. 显示: 显示面板采用2.8英寸电阻式彩色触摸屏, 配合物理按键, 按压灵敏度好
13. 特点: 尼龙防阻燃外壳, 离火自熄; 智能RMD主板远程调地址码, 节省时间节约人工; 磁悬浮智能可控速风扇, 散热更佳更静音; 智能控温控速, 时时检测灯具情况; 智能倒显
14. 净重: 23KG
15. 外型尺寸: 370*280*660mm

Product features

1. Power supply: AC110V-240V, 50-60Hz
2. Light source: LED 500W,color temperature 7800K
3. Color wheel: 8 colors+white light+CTO, with rainbow effect
4. Color mixing: Independent CMY color mixing system
5. Static gobo wheel: 12 goboes+open
6. Rotating gobo wheel: 7 goboes+open
7. Zoom: 4-40 ° linear smooth zoom
8. Prism: 8 facet prism+6 liner prism, rotating in both directions, overlaying
9. Control: International DMX512 with RDM function
10. Channel: Standard 20CH/24CH
11. Heat dissipation: copper tube heat dissipation, axial flow fan inlet and outlet bidirectional heat dissipation cooling
12. Display: 2.8-inch color touch screen, combined with physical buttons, with good press sensitivity
13. Features: Nylon flame-retardant shell; Intelligent RMD motherboard remote address code adjustment, saving time and labor; Magnetic levitation intelligent controllable speed fan, with better and quieter heat dissipation; Intelligent temperature and speed control; Intelligent reverse display
14. Net weight: 23KG
15. Dimensions: 370 * 280 * 660mm
16. Packaging size: 770 * 380 * 490mm

中文参数

- 1) 光源: 350W白光LED, 高质量光学透镜组合确保超强输出
- 2) 光束角度范围: 4度-35度
- 3) 控制模式: DMX,主副机
- 4) DMX通道: 22通道/26通道
- 5) 全彩液晶显示屏带4个按键, 实现友好操作界面
- 6) 颜色盘: 12种颜色+白光, 带颜色流水效果
- 7) 图案盘: a)旋转图案盘: 7种图案+白光, 可快速更换图案片, 带可调速图案流水效果
b)固定图案盘: 12种图案+白光, 带可调速图案流水效果
- 8) 一个旋转3棱镜和一个8棱镜, 可叠加, 可变速旋转
- 9) 其他功能: 电子调焦、电子调光0-100%、电子频闪0-20次/秒、电子雾化、CMY混色系统
- 10) X轴: 540度, Y轴: 270度, 三相电机带16位微调
X轴Y轴锁, 确保安全运输
- 11) 蓝白电源座进出, 三芯卡龙座进出
- 12) 电压: AC100-240V,50/60HZ
- 13) 消耗功率: 450W
- 14) 灯具尺寸: L 380 x W 270 x H 650 mm
- 15) 净重: 22.5kg

Product features

- 1.) Light Source: 350W white LED, high quality dichroic glass lens for powerful output
- 2.) Zoom range : 4° -35°
- 3.) Control Mode – DMX, Master/Slave built-in programs
- 4.) DMX channels – 22/ 26 Ch.
- 5.) LCD display and 4 buttons for easy navigation
- 6.) Color wheel: 12 colors + white, continuous scroll at variable speeds
- 7.) Gobo wheels :
a.) Rotating : 7+ open, interchangeable
b.) Static : 12 + open, continuous scroll at variable speeds
- 8.) Prism : one 3-facet Prism & one 8-facet Prism, can overlying, bi-directional rotatable at variable speeds
- 9.) Other functions: Motorized focus, Linear 0 ~ 100% dimming, Electronic strobe effects 0~20Hz, Motorized frost, CMY color mixing system
- 10.) Pan : 540 degree; Tilt – 270 degree;
Pin/ Tilt Lock for safe transportation
- 11.) Powercon in/out, 3 Pin XLR in/ out
- 12.) Power : AC 100 ~240V, 50/60Hz
- 13.) Power consumption: 450W
- 14.) Dimensions: 380(L)*270(W)*650(H)mm
- 15.) Net Weight: 22.5kg



HT-LM-250BSW

250W LED光束图案柔光三合一摇头灯

250W LED moving head beam spot wash 3in1

中文参数

- 1.电压: 110v-240v,50-60HZ
- 2.消耗功率: 300W
- 3.光源: 200WLED灯珠, 色温9000K, 寿命5万小时
- 4.旋转角度: X轴540°,Y轴270°,精度16bit.三相电机触动, 强劲平稳
- 5.光束角度: 9-42度
- 6.调光: 0-100%线性调节
- 7.颜色盘: 白光+9个颜色
- 8.金属图案盘: 9个固定图案+白光+流水抖动效果
- 9.玻璃图案盘: 7个玻璃图案+白光+图案自转、流水、抖动效果
- 10.棱镜系统: 一个三棱镜, 旋转角度可调, 最大开光角度80°
- 11.雾化系统: 一个独立雾化效果, 光斑柔和自然
- 12.高速频闪: 0-20 次/秒, 超高速频闪
- 13.显示方式: LED显示屏+按键操作
- 14.控制系统: 国际标准DMX512协议, 17个控制通道, 具有RDM功能
- 15.控制模式: 自走、声控、DMX512可自由选择
- 16.冷却方式: 航空铝散热器+4个静音风扇, 温控系统自动调整风扇转速
- 17.IP防护等级: IP20 工作温度-25℃-45℃
- 18.外观材料: 采用阻燃耐高温塑料和高强度合金材料
- 19.灯体尺寸: 30*20.5*54CM 纸箱尺寸: 55*42*42cm
- 20.产品净量: 13kg 毛重: 14.8kg
- 21.航空箱: 66*33*72cm 含灯: 51kg

Product features

1. Voltage: 110V-240V, 50-60HZ
2. Power consumption: 300W
3. Light source: 200W LEDs, color temperature 9000K, lifespan 50000 hours
4. Rotation angle: 540 ° X-axis, 270 ° Y-axis, precision of 16bit. Three phase motor triggering, strong and stable
5. Beam angle: 9-42 degrees
6. Dimming: 0-100% linear adjustment
7. Color wheel: White light+9 colors
8. Metal gobo wheel: 9 fixed goboes+white, gobo flowing and gobo shaking effect
9. Glass gobo wheel: 7 glass goboes+white, with gobo rotation, flowing, and shaking effects
10. Prism system: a 3-facet prism with adjustable rotation angle
11. Atomization system: an independent atomization effect, with a soft and natural light spot
12. High speed flicker: 0-20 times/second, ultra high speed flicker
13. Display mode: LED display+button operation
14. Control system: International standard DMX512 protocol, 17 control channels, with RDM function
15. Control mode: Auto, Sound control, DMX512
16. Cooling method: aviation aluminum radiator+4 silent fans, temperature control system automatically adjusts fan speed
17. IP protection level: IP20, working temperature -25 °C -45 °C
18. Appearance materials: Made of flame-retardant and high-temperature resistant plastic and high-strength alloy materials
19. Light size: 30 * 20.5 * 54CM, Carton size: 55 * 42 * 42cm
20. Net product weight: 13kg Gross weight: 14.8kg
21. Aviation box: 66 * 33 * 72cm, including lights: 51kg

www.idealight.com.cn



HT-LM-300Beam

300W LED摇头光束灯


300W LED moving head Beam

中文参数

- 1.电压: AC100-240V, 50-60Hz
- 2.功率: 350W
- 3.光源: 250W白色LED模组光源,色温: 7500K
- 4.LED寿命: 50000小时, 低功耗, 节能环保。
- 5.水平: 540° (16位扫描) 电子校正
- 6.垂直: 250° (16位扫描) 电子校正
- 7.颜色盘: 12个颜色片+白光, 带彩虹效果
- 8.图案盘: 14个图案片+白色, 带图案流水和图案抖动
- 9.频闪: 高达每秒13次, 具有随机, 脉冲功能
- 10.调光: 0-100%线性
- 11.棱镜: 双棱镜效果, 一个24棱镜, 一个8棱镜, 棱镜可叠加
- 12.雾化: 0-100%线性
- 13.特殊功能: 关闭快门5秒, 灯泡功率自动降低35%, 延长灯泡寿命。风扇转速低于500RPM, 熄灯保护
- 14.防护等级: IP20
- 15.净重: 15公斤

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 350W
3. Light source: 250W white LED module light source, color temperature: 7500K
4. LED lifespan: 50000 hours, low power consumption
5. Pan: 540 ° (16 bit scan) electronic calibration
6. Tilt: 250 ° (16 bit scan) electronic calibration
7. Color wheel: 12 color chips+white, with rainbow effect
8. Gobo wheel: 14 goboes+white, with gobo flowing and gobo shaking effect
9. Strobe: up to 13 times per second, with random and pulse functions
10. Dimming: 0-100% linear
11. Prism: Double prism effect, one 24 prism, one 8-prism, prisms can be stacked
12. Atomization: 0-100% linear
13. Special function: Close the shutter for 5 seconds, and the bulb power will automatically decrease by 35%, extending the lifespan of the bulb. Fan speed below 500RPM, turn off light for protection
14. Protection level: IP20
15. Net weight: 15kgs

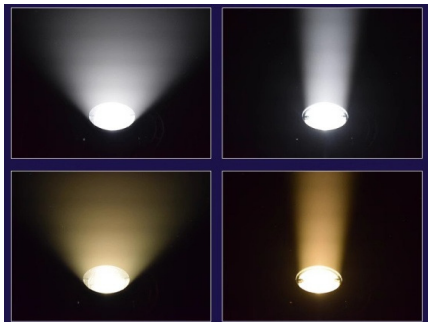

HT-LM-200ZW

200W LED摇头调焦染色灯

200W LED moving head zoom wash



HT-LM-3740BEE

37x40W LED摇头峰眼灯

37x40W LED moving head Bee Eyes

中文参数

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 500W
3. LED: 1颗400W的单白大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 5° 到60° 自由调节
5. 控制模式: DMX, 主副机, 自走
6. DMX 512通道: 11通道
7. 颜色: 两种颜色+白光
8. 水平扫描: 540°, 可自动校正定位
9. 垂直扫描: 250°, 可自动校正定位
10. 外观: 耐高温塑料+模压合金材料
11. 其他功能: 调光, 频闪
12. 产品尺寸: 290*225*480mm
13. 静重: 9KG

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 500W
3. LED: 1X 400W white LED, high brightness with a average lifetime as 50,000hrs
4. Beam Angle: 5-60degree
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 11CH
7. Color: 2colors + open
8. Pan: 540degree
9. Tilt: 270degree
10. Housing: High temperature resistant plastic+molded alloy material
11. Functions: Dimmer, Strobe
12. Packing Size: 290*225*480mm
13. G. W: 9KG

中文参数

1. 额定电压: AC100V~240V 50/60Hz
2. 输入功率: 1500W
3. 光源规格: 37颗40W红绿蓝白四合一LED欧司朗光源
4. 使用寿命: 30000小时
5. 调焦: 2°-60°DMX线性调焦, 具自动调焦功能
6. 电子频闪, 0.3~25次/秒, 可选择同步、异步随机频闪
7. 调光: 电子调光0~100%线性调节, 具有伽马曲线调光频率1.2K~25K可调, 线性稳定平滑不闪烁
8. 旋转角度: 水平方向540° (16 bit精度扫描), 垂直方向270° (16 bit精度扫描)
9. 控制方式: 22CH/36CH/133CH/147CH/170CH
10. 显示功能: 2.8寸触摸显示屏、中英文双语菜单、传感器故障显示, 温度显示, 屏幕自动旋转
11. 散热系统: 采用高导铜管散热器, 内置过热保护智能系统
12. 效果模式: 漩涡, 万花筒, 染色, 光束, 前置镜盘可变向无极旋转, 灯珠单颗点控
13. 防护等级: IP22

Product features

1. Voltage: AC100V~240V 50/60Hz
2. Power consumption: 1500W
3. Light source: 37x40W RGBW 4IN1 Osram LED
4. Lifespan: 30000 hours
5. Focusing: 2° -60° DMX linear focusing with automatic focusing function
6. Electronic strobe, 0.3-25 times/second, synchronous or asynchronous random strobe optional
7. Dimming: Electronic dimming with 0-100% linear adjustment, with gamma curve dimming frequency adjustable from 1.2K to 25K, linear stability, smooth and flicker free
8. Rotation angle: Pan 540° (16 bit fine), Tilt 270° (16 bit fine)
9. Control mode: 22CH/36CH/133CH/147CH/170CH
10. Display function: 2.8-inch touch screen display, bilingual Chinese and English menu, sensor fault display, temperature display, automatic screen rotation
11. Heat dissipation system: using high conductivity copper tube heat sink, built-in overheat protection intelligent system
12. Effect modes: Vortex, Kaleidoscope, Dyeing, Beam, Front Mirror Disk with Variable Non Polarized Rotation, LED pixel Control
13. Protection level: IP22



HT-LM-1940BEE

19x40W LED摇头峰眼灯

19x40W LED moving head Bee Eyes



HT-LM-760BEE

7x60W LED摇头峰眼灯

7x60W LED moving head Bee Eyes

中文参数

- 1.电压: AC100-240V, 50-60Hz
- 2.消耗功率: 800W
- 3.灯珠: 19颗40W 红绿蓝白四合一高亮度灯珠
- 4.X轴: 540度
- 5.X轴: 270度
- 6.调光: 0-100%线性调光
- 7.频闪: 高速电子频闪0-25次/秒
- 8.调焦: 3个调焦电机, 确保调焦平稳快速
- 9.运行模式: DMX512,主副机,自走,音控
- 10.DMX通道: 24/26/38/81/95/100/102CH
- 11:特殊效果: LED板可连续旋转, 镜头的双向旋转的独特设计达到惊人的效果, 旋转速度可调
- 12.产品尺寸: 300*230*370mm
- 13.净重: 8kg

Product features

- 1.Power Supply: AC100-240V, 50-60Hz
- 2.Power Consumption: 800W
- 3.Light Source: 19pcs*40W 4in1 RGBW high brightness Osram leds
- 4.PAN: 540 degree with 16bit rotate
- 5.Tilt: 270 degree with 16bit rotate
- 6.Dimmer: 0-100% linear dimming system
- 7.Strobe: High speed electronic strobe reaches 0-25 times/second and pulse effect
- 8.ZOOM: 3 ZOOM motors work together with the same step
- 9.Operation Mode: DMX512,Master/slave,Auto,Sound
- 10.DMX Channel: 24/26/38/81/95/100/102 DMX Channels
- 11: Effect: LED board plate can rotate to make amazing effect with speed adjustable
- 12.Product Size: 300*230*370mm
- 13.Net Weight: 8kg

中文参数

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 500W
3. LED: 7颗60W红绿蓝白4合1的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 3°到45°自由调节
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 21/23/35/42/49/51/56通道
7. 高档彩色液晶显示屏
8. 水平扫描: 540°/360°
9. 垂直扫描: 270°
10. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光(0-100%), 频闪(1-20Hz), 点控, 调焦, 峰眼
11. 产品尺寸: 376*280*422.5mm
包装尺寸: 515*370*475mm
12. 静重: 16.5KG 毛重: 20KG

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 500W
3. LED: 7pcs 60W Quad-RGBW LED, high brightness with a average lifetime as 50, 000hrs
4. Beam Angle: 3°-45°
5. Operation Mode: DMX, Master/slave, Auto, Sound activation
6. DMX 512 control channel: 21/23/35/42/49/51/56CH
7. Color LCD Display
8. Pan: 540°/360°
9. Tilt: 270°
10. Functions: Color mixing, Color change, Color fade, Dimmer(0-100%), Strobe(1-20Hz), pixel control, Zoom, Bee
11. Product Size: 376*280*422.5mm
Packing size: 515*370*475mm
12. N.W: 16.5KG G.W: 20KG



HT-LM-1940BEE
19x40W LED摇头峰眼灯
19x40W LED moving head Bee Eyes



HT-LM-3715BZ
37x15W LED摇头灯带调焦
37x15W LED moving head wash with zoom

中文参数

- 1.电压: AC100-240V, 50-60Hz
- 2.消耗功率: 900W
- 3.灯珠: 19颗40W 红绿蓝白四合一高亮度灯珠, 带5050辅光点控灯圈
- 4.光斑角度: 4.5°-45°
- 5.X轴: 540度 Y轴: 270度
- 6.调光: 0-100%线性调光
- 7.频闪: 高速电子频闪0-25次/秒
- 8.调焦: 3个调焦电机, 确保调焦平稳快速
- 9.运行模式: DMX512,主副机,自走,音控
- 10.DMX通道:
28CH/30CH/40CH/42CH/44CH/46CH/54CH/59CH
- 11:特殊效果: 点控, 圈控功能, 支持RDM功能, 多种内置跑马蜂窝效果, 线性色温调节, XY轴电机和旋转盘自动纠错功能
- 12.产品尺寸: 300*230*370mm
- 13.净重: 9kg

Product features

- 1.Power Supply: AC100-240V, 50-60Hz
- 2.Power Consumption: 900W
- 3.Light Source: 19pcs*40W 4in1 RGBW high brightness Osram leds with 5050 auxiliary light circle
4. Beam angle: 4.5°-45°
- 5.PAN: 540 degree Tilt: 270 degree
- 6.Dimmer: 0-100% linear dimming system
- 7.Strobe: High speed electronic strobe reaches 0-25 times/second and pulse effect
- 8.ZOOM: 3 ZOOM motors work together
- 9.Operation Mode: DMX512,Master/slave,Auto,Sound
- 10.DMX Channel:
28CH/30CH/40CH/42CH/44CH/46CH/54CH/59CH
- 11: Special effects: group control, circle control function, support for RDM function, multiple built-in chases and honeycomb effects, linear color temperature adjustment, XY axis motor and automatic error correction function of rotating disc
- 12.Product Size: 300*230*370mm
- 13.Net Weight: 9kg

中文参数

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 600W
3. LED: 37颗15W红绿蓝白4合1的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 冷却系统: 高导电铝冷却+风冷
5. 光束角度: 8°到45°自由调节
6. 调光(0-100%)
7. 频闪(1-20Hz)
8. 控制模式: DMX, 主副机, 自走, 音控
9. DMX 512通道: 24/36通道
10. 水平扫描: 540° 垂直扫描:270°
11. 混色系统: 光斑柔和自然, 具有彩虹效果。圈控可选, 4组led, 可单独控制。
12. 包装尺寸: 370*420*495mm
- 13.毛重: 13.5KG

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 600W
3. LED: 37PCS 15w RGBW 4IN1 leds
4. Cooling system: high conductivity aluminum cooling + air cooling
5. Zoom: the light spot can be enlarged or reduced linearly, Beam Angle 8-45degree
6. Dimmer: 0-100% liner dimmer
7. Strobe: 1-20times/second
8. Operation Mode: DMX, Master/slave, Auto
9. DMX channel: 24CHS/36CHS
10. Pan: 540degree; Tilt: 270degree, electronic automatic positioning, Pan tilt fine: 8/16Bit
11. Color mixing system: light spot is soft and natural, with rainbow effect. Group control optional, 4groups leds, can control separately.
12. Packing size: 370*420*495mm
13. G.W: 13.5KG



HT-LM-1240
12x40W LED摇头柔光灯
12x40W LED moving head wash



HT-LM-640B
6x40W LED六眼摇头光束灯
6x40W LED 6-eyes moving head beam

中文参数

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 600W
3. LED: 12颗40W红绿蓝白4合1的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
4. 光束角度: 4.5°到45°自由调节
5. 控制模式: DMX, 主副机, 自走, 音控
6. DMX 512通道: 11通道/17通道/18通道/58通道
7. 高档彩色液晶显示屏
8. 水平扫描: 540°
9. 垂直扫描: 270°
10. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光(0-100%), 频闪(1-20Hz), 点控, 调焦
11. 产品尺寸: 395*264*408mm
12. 静重: 16KG

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 600W
3. LED: 12pcs 40W Quad-RGBW LED, high brightness with a average lifetime as 50, 000hrs
4. Beam Angle: 4.5-45degree
5. Operation Mode: DMX, Master/slave, Auto, Sound activation
6. DMX 512 control channel: 11CH/17CH/18CH/58CH
7. Color LCD Display
8. Pan: 540degree
9. Tilt: 270degree
10. Functions: Color mixing, Color change, Color fade, Dimmer(0-100%), Strobe(1-20Hz), pixel control, Zoom
11. Product Size: 395*264*408mm
12. N. W: 16KG

中文参数

1. 电压: AC100-240V, 50/60Hz
2. 消耗功率: 300W
3. 光源: 6颗40W 四合一 灯珠
4. 控制方式: 标准DMX512信号协议, 主副机, 自走, 声控
5. 通道模式: 23CH/28CH/63CH
6. 调光技术: FLICKER FREE 10KHz的调光刷新 PWM频闪, 拍摄, 摄像无闪烁。
7. 适用场景: 音乐节、酒吧、清吧, KTV包房等场所.....

Product features


1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 300W
3. LED: 6pcs 40W Quad-RGBW LED, high brightness with a average lifetime as 50, 000hrs
4. Operation Mode: DMX, Master/slave, Auto, Sound activation
5. DMX 512 control channel: 23CH/28CH/63CH
6. Dimming technology: FLICKER FREE 10KHz dimming refresh, PWM strobe, shooting without flickering.
7. Applications: music festivals, bars, KTV etc



HT-LM-1915
19x15W LED摇头柔光灯
19x15W LED moving head wash



HT-LM-19BEE
19x15W LED峰眼摇头灯
19x15W LED bee eyes moving head

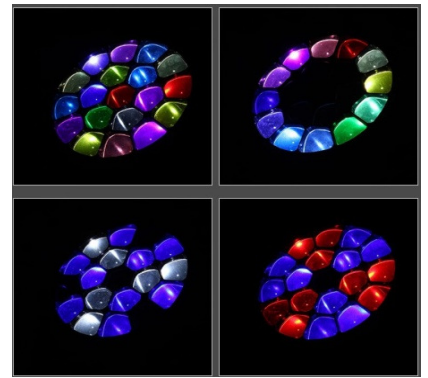

中文参数

1. 额定电压: AC100-240V, 50 / 60HZ
2. 额定功率: 300W
3. 光源: 19颗15W RGBW LED
4. 冷却系统: 高导铝散热+风冷
5. 缩放: 光斑可线性放大缩小, 缩放角度8-45度
6. 调光: 0~100%线性平滑调光
7. 频闪: 0—20次 / 秒, 多种频闪效果
8. 控制模式: DMX512信号 / 主从 / 同步
9. 通道: 14CH/24CH
10. 扫描速度: 水平540°, 垂直270° / 速度可调节, 错位自动恢复 / 电子自动定位, 扫描微调8 / 16Bit.
11. 混色系统: 光斑柔和自然, 带彩虹效果。圈控可选, 分3组灯珠, 实现圈控功能
12. 包装尺寸: 270*420*495mm
13. 产品重量: 9.5KG

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 300W
3. LED: 19PCS 15w RGBW 4IN1 leds
4. Cooling system: high conductivity aluminum cooling + air cooling
5. Zoom: the light spot can be enlarged or reduced linearly, Beam Angle 8-45degree
6. Dimmer: 0-100% liner dimmer
7. Strobe: 1-20times/second
8. Operation Mode: DMX, Master/slave, Auto
9. DMX channel: 14CHS/24CHS
10. Pan: 540degree; Tilt: 270degree, electronic automatic positioning, Pan tilt fine: 8/16Bit
11. Color mixing system: light spot is soft and natural, with rainbow effect. Group control optional, 3groups leds, can control seperately.
12. Packing size: 270*420*495mm
13. G.W: 9.5KG

中文参数

- 1.电压: AC100-240V, 50-60Hz
- 2.消耗功率: 300W
- 3.灯珠: 19颗15W 红绿蓝白四合一高亮度灯珠
- 4.X轴: 540度
- 5.X轴: 270度
- 6.调光: 0-100%线性调光
- 7.频闪: 高速电子频闪0-25次/秒
- 8.调焦: 3个调焦电机, 确保调焦平稳快速
- 9.运行模式: DMX512,主副机,自走,音控
- 10.DMX通道: 18CH
- 11.特殊效果:
LED板可连续旋转360度, 镜头的双向旋转的独特设计达到惊人的效果, 旋转速度可调
51种内置静态效应和51种内置动态效应, 8种内置程序
- 12.产品尺寸: 300*230*370mm
- 13.净重: 8kg

Product features

- 1.Power Supply: AC100-240V, 50-60Hz
- 2.Power Consumption: 300W
- 3.Light Source: 19pcs*15W 4in1 RGBW high brightness leds
- 4.PAN: 540 degree with 16bit rotate
- 5.Tilt: 270 degree with 16bit rotate
- 6.Dimmer: 0-100% linear dimming system
- 7.Strobe: High speed electronic strobe1-25 times/second
- 8.ZOOM: 3 ZOOM motors work together with the same step
- 9.Operation Mode: DMX512,Master/slave,Auto,Sound
- 10.DMX Channel: 18 DMX Channels
11. Effect:
LED board plate can rotate continuously 360degree to make amazing effect with speed adjustable
Built-in 51 static effects and 51 dynamic effects, 8 multiple built-in programs
Front Lens Bi-directional Rotation unique design to get an amazing effects.
- 12.Product Size: 300*230*370mm
- 13.Net Weight: 8kg



HT-LM-560BS

5*60W LED双面摇头灯

5*60W LED moving beam and strobe 2in1



HT-LB-1040

10*40W LED长条摇头灯

10*40W LED moving bar light

中文参数

- 1.电压/频率: AC100-240V, 50-60Hz
- 2.额定功率: 500W
- 3.光源: 5颗高亮度大功率60W 4合1 LED灯珠, 42颗 3535 高亮白光, 84颗5050 RGB灯珠
- 4.光束角度: 2-60°
- 5.控制通道: 24/29/105通道
- 6.运行模式: DMX512, 主从, 自走, 声控
- 7.X/Y轴: 无极旋转
- 8.调光: 0-100%线性调光, FLICKER FREE 10KHz的调光刷新 PWM频闪, 拍摄, 摄像无闪烁
- 9.频闪: 1-20次/秒
- 10.适用场景: 音乐节、酒吧、清吧、KTV包房

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 500W
3. Light source: 5 x 60W 4-in-1 high brightness and high power LEDs, 42pcs 3535 high brightness white LEDs, and 84pcs 5050 RGB LEDs
4. Beam angle: 2-60 °
5. Control channel: 24/29/105CH
6. Operation mode: DMX512, Master/slave, Auto, Sound
7. X/Y axis: infinite rotation
8. Dimming: 0-100% linear dimming, FLICKER FREE 10KHz dimming refresh PWM strobe, no flickering during shooting and filming
9. Strobe: 1-20 times/second
10. Applicable scenarios: music festivals, bars, clubs, KTV rooms



中文参数


- 1.电压/频率: AC100-240V, 50-60Hz
- 2.额定功率: 450W
- 3.光源: 10颗高亮度大功率40W 4合1 LED灯珠, 平均寿命50000小时
- 4.光束角度: 2-60°
- 5.控制通道: 16/42通道
- 6.运行模式: DMX512, 主从, 自走, 声控
- 7.Y轴: 90°
- 8.调光: 0-100%线性调光
- 9.频闪: 1-20次/秒
- 10.其他功能: 内置多种跑马效果配合Y轴旋转带来动感的效果
- 11.灯具尺寸: 1100 x 95 x 200mm
- 12.净重: 13kgs
- 13.适用范围: 酒吧、迪厅、酒店、舞厅、舞台、婚庆等

Product features

- 1.Voltage: AC100-240V, 50-60Hz
- 2.Power consumption: 450W
- 3.Light source: 10x40W RGBW 4in1 LED, average lifetime 50000hours
- 4.Beam angle: 2-60°
- 5.DMX channels: 16/42CH
- 6.Operation mode: DMX512, Master/slave, Auto, Sound
- 7.Tilt: 90°
- 8.Dimmer: 0-100%
- 9.Strobe: 1-20HZ
10. Other functions: Built-in multiple chasing effects combined with Y-axis rotation to bring dynamic effects
11. Lighting size: 1100 x 95 x 200mm
12. N.W: 13kgs
13. Application: bars, discos, hotels, stages, weddings etc



HT-LM-1240Q
12*40W LED长条摇头灯
12*40W LED moving bar light

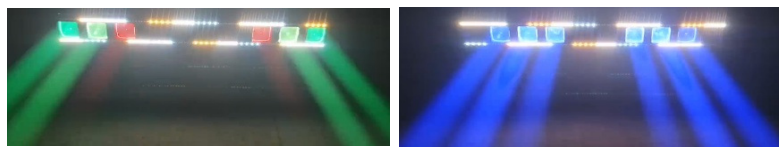

HT-LM-1060BS
10x60W LED摇头长条光束频闪灯
10x60W LED moving bar beam & strobe

中文参数

1. 电压/频率: AC100-240V, 50-60Hz
2. 额定功率: 600W
3. 光源: 12颗高亮度大功率40W 4合1 LED灯珠, 平均寿命50000小时
4. 光束角度: 2-60°
5. 控制通道: 16/42通道
6. 运行模式: DMX512, 主从, 自走, 声控
7. Y轴: 90°
8. 调光: 0-100%线性调光
9. 频闪: 1-20次/秒
10. 其他功能: 内置多种跑马效果配合Y轴旋转带来动感的效果
11. 灯具尺寸: 1100 x 105 x 200mm
12. 净重: 14kgs
13. 适用范围: 酒吧、迪厅、酒店、舞厅、舞台、婚庆等

Product features

- 1.Voltage: AC100-240V, 50-60Hz
- 2.Power consumption: 600W
- 3.Light source: 12x40W RGBW 4in1 LED, average lifetime 50000hours
- 4.Beam angle: 2-60°
- 5.DMX channels: 16/42CH
- 6.Operation mode: DMX512, Master/slave, Auto, Sound
- 7.Tilt: 90°
- 8.Dimmer: 0-100%
- 9.Strobe: 1-20HZ
10. Other functions: Built-in multiple chasing effects combined with Y-axis rotation to bring dynamic effects
11. Lighting size: 1100 x 105 x 200mm
12. N.W: 14kgs
13. Application: bars, discos, hotels, stages, weddings etc

中文参数

1. 电压/频率: AC100-240V, 50-60Hz
2. 额定功率: 700W
3. 光源: 10颗高亮度大功率60W 4合1 LED灯珠, 平均寿命20000小时
96颗0.5W RGB三合一 LED灯珠, 平均寿命50000小时
4. 光束角度: 2.8-31°
5. 控制通道: 16/99通道
6. 运行模式: DMX512, 主从, 自走, 声控
7. Y轴: 220°
8. 调光: 0-100%线性调光
9. 频闪: 1-20次/秒
10. 其他功能: 光束饱满锐利, 卓越的混色功能, 可控的频闪效果, 断电保护功能
11. 灯具尺寸: 1000 x 120 x 290mm
12. 净重: 23kgs
13. 适用范围: 酒吧、迪厅、酒店、舞厅、舞台、婚庆等

Product features

- 1.Voltage: AC100-240V, 50-60Hz
- 2.Power consumption: 700W
- 3.Light source: 10x60W RGBW 4in1 LED, average lifetime 20000hours
96x0.5W RGB 3IN1 LED, average lifetime 50000hours
- 4.Beam angle: 2.8-31°
- 5.DMX channels: 16/99CH
- 6.Operation mode: DMX512, Master/slave, Auto, Sound
- 7.Tilt: 220°
- 8.Dimmer: 0-100%
- 9.Strobe: 1-20HZ
10. Other functions: Full and sharp beam, excellent color mixing function, controllable strobe effect, power outage protection
11. Lighting size: 1000 x 120 x 290mm
12. N.W: 23kgs
13. Application: bars, discos, hotels, stages, weddings etc



HT-LM-1060Q IP

10*60W LED防水长条摇头灯

10*60W LED waterproof moving bar light

中文参数

- 1.电压/频率: AC100-240V, 50-60Hz
- 2.额定功率: 650W
- 3.光源: 10颗高亮度大功率60W 4合1 LED灯珠, 140颗0.3W RGB W CW LED
- 4.光束角度: 3-25°
- 5.控制通道: 26/36/56/66/166CH
- 6.运行模式: DMX512, 主从, 自走, 声控
- 7.Y轴: 220°
- 8.调光: 0-100%线性调光
- 9.频闪: 1-20次/秒
- 10.其他功能: 光束饱满锐利, 卓越的混色功能, 可控的频闪效果, 断电保护功能
- 11.电源接口: 防水Power Connector输入/输出
- 12.DMX 信号接头: 3芯防水卡侬接头一进一出
- 13.外壳材质: 铝合金, 防护等级: IP65
- 14.灯具尺寸: 1000 x 159 x 403.6mm
- 15.重量: 31KG

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 650W
3. Light source: 10pcs 60W 4-in-1 LEDs, 140pcs 0.3W RGB W CW LEDs
4. Beam angle: 3-25 °
5. Control channel: 26/36/56/66/166CH
6. Operation mode: DMX512, Master/slave, Auto, Sound
7. Y-axis: 220 °
8. Dimming: 0-100% linear dimming
9. Strobe: 0-20HZ
10. Other functions: Full and sharp beam, excellent color mixing function, controllable flicker effect, power-off protection function
11. Power interface: Waterproof power input/output
12. DMX signal connector: 3-core waterproof XLR in and out
13. Shell material: aluminum alloy, protection level: IP65
14. Lamp size: 1000 x 159 x 403.6mm
15. Weight: 31KG



HT-LM-1060Q IPA

10*60W LED防水长条摇头灯压铸铝机箱

10*60W LED waterproof moving bar die casting aluminum

中文参数

- 1.电压/频率: AC100-240V, 50-60Hz
- 2.额定功率: 800W
- 3.光源: 10颗高亮度大功率60W 4合1 LED灯珠, 平均寿命20000小时
96*2W CW LED, 96*2W WW LED, 96*1W RGB LED, 平均寿命50000小时
- 4.光束角度: 2.8-31°
- 5.控制通道: 29CH 19CH 172CH 170CH 110CH 101CH
- 6.运行模式: DMX512, 主从, 自走, 声控
- 7.Y轴: 202°
- 8.调光: 0-100%线性调光
- 9.频闪: 1-20次/秒
- 10.其他功能: 光束饱满锐利, 卓越的混色功能, 可控的频闪效果, 断电保护功能
- 11.电源接口: 防水Power Connector输入/输出
- 12.DMX信号接头: 3芯防水卡侬接头一进一出
- 13.显示: LCD 显示
- 14.外壳材质: 压铸铝
- 15.防护等级: IP65

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 800W
3. Light source: 10pcs 60W 4-in-1 LEDs, with an average lifespan of 20000 hours
96*2W CW LED, 96*2W WW LED, 96 * 1W RGB LED with an average lifespan of 50000 hours
4. Beam angle: 2.8-31 °
5. Control channel: 29CH/19CH/172CH/170CH/110CH/101CH
6. Operation mode: DMX512, Master/slave, Auto, Sound control
7. Y-axis: 202 °
8. Dimming: 0-100% linear dimming
9. Strobe: 0-20 times/second
10. Other functions: Full and sharp beam, excellent color mixing function, controllable flicker effect, power-off protection function
11. Power interface: Waterproof Power input/output
12. DMX signal connector: 3-core waterproof XLR in and out
13. Display: LCD display
14. Shell material: Die cast aluminum
15. Protection level: IP65



HT-LM-1260S

12*60W LED千手观音摇头灯

12*60W LED 12-head moving bar light

中文参数

1. 电压/频率: AC100-240V, 50-60Hz
2. 消耗功率: 800W
3. 灯珠: 12颗60瓦四合一LED灯珠
4. 控制方式: DMX512、自走、主从、声控、带RDM功能。
5. 通道: CH20.CH169A.CH169B.CH53.CH101.CH155.CH179
6. 调光: 32bit 0~100%线性调光
7. 特点: 单颗摇摆+染色+光束
8. 工作温度: -30度~50度
9. 频闪频率: 1~30HZ
10. 外观: 金属、黑色
11. 连接方式: DMX512输入输出 / 电源输入输出。
12. IP 等级: IP20

Product features

1. Voltage: AC100~240V 50/60HZ
2. Power consumption: 800W
3. LEDs: 12x60 watt RGBW 4in1 LEDs
4. Control method: DMX512/Auto/Master-slave/Sound control, with RDM function.
5. Channel: CH20.CH169A.CH169B.CH53.CH101.CH155.CH179
6. Dimming: 32-bit 0~100% linear dimming
7. Features: Single head swing+wash+beam
8. Working temperature: -30 ° C~50 ° C
9. Strobe frequency: 1~30HZ
10. Appearance: Metal, Black
11. Connection method: DMX512 input/output, power input/output.
12. IP rating: IP20



HT-LM-660Q

6*60W LED长条摇头灯

6*60W LED 6-head moving bar

中文参数

1. 电源: AC100V-240V,50-60Hz
2. 消耗功率: 450W
3. 光源: 6颗60W欧斯朗四合一灯珠 灯带辅光6*21*0.3W RGB三合一5050贴片灯珠
4. 色温: 2800K-10000K
5. Y轴垂直扫描: 270度
6. 灯珠寿命: 50000 hours
7. 光斑角度: 4.5°-45°
8. 控制方式: DMX512、声控, 自走
9. 通道模式: 34CH/49CH/69CH, 支持RDM功能
10. 液晶显示屏: 中、英文显示
11. 频闪: 1-25Hz
12. 调光: 0-100% (16bit) 出色调光无闪烁
13. 高效智能散热系统, 全程温度监测, 过温自动调节保护, 无灯珠损坏风险, 智能控制风机风速
14. 其他功能: 单颗点控, 多种跑马效果, 线性色温调节

Product features

1. Power Supply: AC100V-240V,50-60Hz
2. Power consumption: 450W
3. Light source: 6x60W Osram 4in1 LEDs with auxiliary light 6 * 21 * 0.3W RGB 3in1 5050 SMD LEDs
4. Color temperature: 2800K-10000K
5. Y-axis vertical scanning: 270 degrees
6. Led lifespan: 50000 hours
7. Beam angle: 4.5 ° -45 °
8. Control mode: DMX512/Sound control/Auto
9. Channel mode: 34CH/49CH/69CH, supports RDM function
10. LCD display: Chinese and English display
11. Strobe: 1-25Hz
12. Dimming: 0-100% (16 bit) Excellent dimming without flicker
13. Efficient intelligent cooling system, temperature monitoring throughout the process, automatic over temperature adjustment protection, no risk of lamp bead damage, intelligent control of fan speed
14. Other functions: single head control, multiple scrolling effects, linear color temperature adjustment



HT-LM-580

5*80W LED龙卷风摇头灯

5*80W LED tornado moving head light

中文参数

1. 电压: AC100V-240V, 50-60Hz
2. 功率: 500W
3. 光源: 光束端: 5 x 80W RGBL LED
外圈LED: 幻彩灯带
4. 光束角度: 3° -30°
5. 控制面板: LCD显示屏
6. 控制协议: DMX512, RDM, Art-Net,
7. DMX通道模式: 28CH/85CH
8. X轴运转角度: 无极旋转, 16 bit, 失步自动校正
9. Y轴运转角度: 无极旋转, 16 bit, 失步自动校正
10. 多种速度频闪效果
11. 0-100%顺滑调光
12. 卓越的混色功能, 卓越的色彩宏效果
13. 快速线性调焦功能
14. 电源插座: 电源连接器输入/输出
信号输入/输出: 3芯卡侬头插座

Product features

1. Voltage: AC100V-240V, 50-60Hz
2. Power consumption: 500W
3. Light source: Beam end: 5 x 80W RGBL LED
Outer LED: Colorful LED strip
4. Beam angle: 3°-30°
5. Control panel: LCD display
6. Control Protocol: DMX512, RDM, Art-Net,
7. DMX channel mode: 28CH/85CH
8. X-axis rotation angle: infinite rotation, 16 bit, automatic out of step correction
9. Y-axis rotation angle: infinite rotation, 16 bit, automatic out of step correction
10. Multiple speed strobe effects
11. 0-100% Smooth Dimming
12. Excellent color mixing function, outstanding color macro effect
13. Fast linear focusing function
14. Power socket: power connector input/output
Signal input/output: 3-core XLR socket



HT-LM-660S

6*60W LED无极光束带调焦

6*60W LED moving beam with zoom

中文参数

1. 电压: AC100~240V 50/60HZ
2. 功率: 6*60W (360W)
3. 灯珠: 6颗60瓦四合一LED灯珠
4. 控制方式: DMX512、自走、主从、带RDM功能。
5. 通道: 23CH. 28CH. 62CH. 92CH. 94CH
6. 调光: 32bit 0~100%线性调光
7. 特点: 单颗摇摆+染色+光束
8. 工作环境温度: -30度~50度
9. 频闪频率: 1~30HZ
10. 外观: 金属、黑色
11. 连接方式: DMX512输入输出 / 电源输入输出
12. IP 等级: IP20

Product features

1. Voltage: AC100~240V 50/60HZ
2. Power consumption: 6*60W (360W)
3. LEDs: 6pcs 60W RGBW 4IN1 LEDs
4. Control mode: DMX512/Auto/Master-slave, with RDM function.
5. Channel: 23CH.28CH.62CH.92CH.94CH
6. Dimming: 32-bit 0~100% linear dimming
7. Features: Single swing+wash+beam+zoom
8. Working environment temperature: -30 °C~50 °C
9. Strobe frequency: 1~30HZ
10. Appearance: Metal, black
11. Connection method: DMX512 input/output, power input/output
12. IP rating: IP20



HT-LP-40QZ
1*40W LED调焦帕灯
1*40W LED Par with Zoom



HT-LP-200WZ
1*200W LED调焦面光灯
1*200W LED Par with Zoom

中文参数

一个完美的产品适用于各种活动和移动舞台，具有超优秀的混色，调光，柔光和光束效果。小身材大亮度，适合各类场馆和桁架染色。

- 1) 光源：1颗欧司朗40W红绿蓝白四合一灯珠
- 2) 高质量光学透镜组合确保超强输出
- 3) 光束角度：4-32度
4度：11500 lx@2m, 1850 lx@5m
32度：500 lx@2m
- 4) 控制模式：DMX,主副机,音控
- 5) DMX通道：5/7/9通道
- 6) 超优秀的混色，调光，柔光和光束效果
- 7) 快而静的光束角度缩放效果
- 8) 蓝白电源座进出
- 9) 三芯信号卡龙座进出
- 10) 电压：AC100-240V,50/60HZ
- 11) 消耗功率：83W
- 12) 灯具尺寸：L 280 x W 118 x H 165 mm
- 13) 净重：2.5kgs

Product features

A perfect tool for the events and mobile DJs, delivering excellent color mixing, dimming, wash and beam effects. The product comes with compact size (par36), powerful output, suitable for all venues and truss light-up.


- 1.) Light Source : Osram 40W Quad (RGBW) Led.
- 2.) High quality aspherical glass lens for powerful output
- 3.) Beam angle : 4 ~ 32 degree
4 degree : 11500 lx@2m, 1850 lx@5m
32 degree : 500 lx@2m
- 4.) Control Mode – DMX, Master/Slave, Sound Active
- 5.) DMX channels – 5/ 7/ 9 Ch.
- 6.) Excellent color mixing, dimming, beam and wash effects
- 7.) Fast and quiet zooming effects
- 8.) Powercon in/out
- 9.) 3 Pin XLR in/out
- 10.) AC 100~ 240V, 50/60Hz
- 11.) Power consumption: 49W
- 12.) Size: L 280 x W 118 x H 165 mm
- 13.)Weight: 2.5kgs

中文参数

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 220W
3. 灯珠: 1颗200W暖白(3000K)灯珠或1颗200W冷白(5600K)灯珠或冷白暖白二合一灯珠
4. 电动调焦光束角度: 8-60度
5. 控制模式: DMX,主副机,自走
6. DMX通道: 1CH/2CH/3CH
- 7.产品尺寸: 310x215x225mm
- 8.静重: 5KG

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power Consumption: 220W
3. LED: 1 x 200W warm white LED (3000K) or 1 x 200W cool white LED (5600K) or WW & CW 2IN1
4. Motorized zoom beam angle: 8° - 60°
5. Control Mode: DMX, Master/Slave, Auto
6. DMX channel: 1CH/2CH/3CH
7. Product size: 310x215x225mm
8. N.W: 5KG

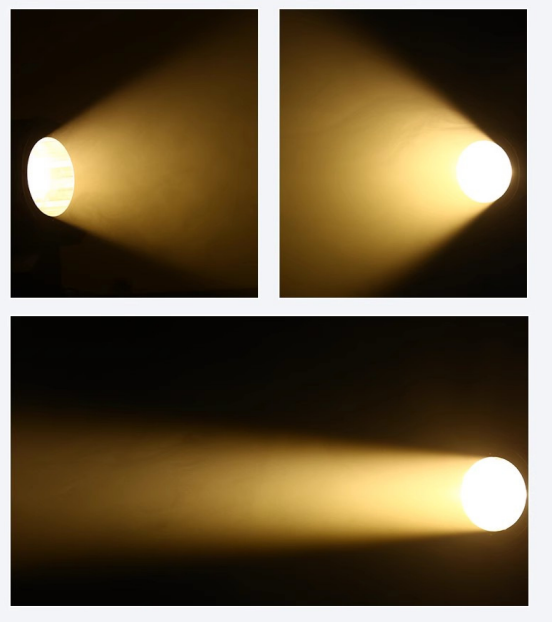



HT-LP-715QZ
7*15W LED调焦帕灯
7*15W LED Par with Zoom



HT-LP-1810NZ
18*10W LED调焦帕灯
18*10W LED Par with Zoom

中文参数

- 1) 光源: 7颗15W红绿蓝白四合一灯珠
- 2) 高质量光学透镜组合确保超强输出
- 3) 光束角度: 5-50度
- 4) 控制模式: DMX,主副机,音控,自走
- 5) DMX通道: 4/8通道
- 6) 超优秀的混色,调光,柔光和光束效果
- 7) 快而静的光束角度缩放效果
- 8) 电源线进出
- 9) 三芯信号卡龙座进出
- 10) 电压: AC100-240V,50/60HZ
- 11) 消耗功率: 120W
- 12) 灯具尺寸: L 255 x W 255x H 420 mm
- 13) 净重: 8.0kgs

Product features

- 1.) Light Source : 7PCS 15W Quad (RGBW) Led.
- 2.) High quality glass lens for powerful output
- 3.) Beam angle : 5 ~ 50 degree
- 4.) Control Mode – DMX, Master/Slave, Sound Active, Auto
- 5.) DMX channels – 4/8 Ch.
- 6.) Excellent color mixing, dimming, beam and wash effects
- 7.) Fast and quiet zooming effects
- 8.) Power in/out
- 9.) 3 Pin XLR in/out
- 10.) AC 100~ 240V, 50/60Hz
- 11.) Power consumption: 120W
- 12.) Size: L 255 x W 255 x H 420 mm
- 13.)Weight: 8.0kgs

中文参数

- 1)输入电压: AC100-240V,50/60Hz
- 2)最大消耗功率:200W
- 3)光源类型:18颗10W4合1 LED灯珠
- 4)光束角度: 10°-60°
- 5)控制方式: DMX512, 主/从机, 自走, 声控
- 6)通道数: 9通道模式
- 7)调光:0-100%线性平滑调光
- 8)频闪:1-25次/秒
- 9)灯体材质: 压铸铝
- 10)产品尺寸: 275*225*325mm
- 11)净重:4Kg

Product features

- 1) Voltage: AC100-240V,50/60Hz
- 2) Power consumption: 200W
- 3) Light source: 18x10W RGBW 4IN1 LEDs
- 4) Beam angle: 10°-60°
- 5) Operation Mode: DMX512, Master/Slave, Auto, Sound
- 6) DMX channels: 9CHS
- 7) Dimmer: 0-100%
- 8) Strobe:1-25HZ
- 9) Lamp body material: die-cast aluminum
- 10) Product size: 275*225*325mm
- 11) N.W: 4Kg



HT-LP-1810N

18*10W LED RGBW四合一不防水帕灯
18*10W LED RGBW 4IN1 Indoor Par



HT-LP-1810

18*10W LED RGBW四合一防水帕灯
18*10W LED RGBW 4IN1 Waterproof Par

中文参数

1. 电压: AC100-240V, 50-60Hz
 2. 消耗功率: 200W
 3. LED: 18颗10W的RGBW四合一功率LED
 4. 光束角度: 25°/40°
 5. 控制模式: DMX, 主副机, 自走, 音控
 6. DMX 512通道: 4CH/8CH
 7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
 8. 包装尺寸: 265*265*380mm
 9. 毛重: 3.15KG
- RGBWA五合一, RGBWAU六合一可选

Product features

1. Voltage: AC100-240V, 50-60Hz
 2. Power Consumption: 200W
 3. LED: 18pcs 10W RGBW 4IN1 high power LED
 4. Beam Angle: 25degree/40degree
 5. Operation Mode: DMX, Master/slave, Auto, Sound active
 6. DMX 512 control channel: 4CH/8CH
 7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
 8. Packing Size: 265*265*380mm
 9. G. W: 3.15KG
- RGBWA 5IN1, RGBWAUV 6IN1 Optional



中文参数

1. 电压: AC100-240V, 50-60Hz
 2. 消耗功率: 200W
 3. LED: 18颗10W的RGBW四合一功率LED
 4. 光束角度: 25°/40°
 5. 控制模式: DMX, 主副机, 自走, 音控
 6. DMX 512通道: 4CH/8CH
 7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪, 调焦
 8. 包装尺寸: 325*325*250mm
 9. 毛重: 7KG
 10. 防水等级: IP65
- RGBWA五合一, RGBWAU六合一可选

Product features

1. Voltage: AC100-240V, 50-60Hz
 2. Power Consumption: 200W
 3. LED: 18pcs 10W RGBW 4IN1 high power LED
 4. Beam Angle: 25degree/40degree
 5. Operation Mode: DMX, Master/slave, Auto, Sound active
 6. DMX 512 control channel: 4CH/8CH
 7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
 8. Packing Size: 325*325*250mm
 9. G. W: 7KG
 10. IP Rating: IP65
- RGBWA 5IN1, RGBWAUV 6IN1 Optional



光源系统
ABS MATERIAL



高效散热
LEAKAGE PROTECTION



优质灯芯
HIGHLIGHT LAMP BEADS



高透镜片
VOICE CONTROL



温度保护
REMOTE CONTROL



节能耐用
VARIETY OF COLORS



漏电保护
MOTHERBOARD



优质材料
HEAT DISSIPATION



HT-LP-543N
54*3W LED不防水帕灯
54*3W LED Indoor Par



HT-LP-543
54*3W LED防水帕灯
54*3W LED Waterproof Par

中文参数

1. 电压: AC100-240V, 50/60Hz
 2. 消耗功率: 180W
 3. LED: 54颗3W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
 4. 光束角度: 15/25
 5. 控制模式: DMX, 主副机, 自走
 6. DMX 512通道: 8通道
 7. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
 8. 包装尺寸: 265*265*380mm
 9. 毛重: 3.15KG
- RGB三合一灯珠可选

Product features

1. Voltage: AC100-240V, 50/60Hz
 2. Power Consumption: 180W
 3. LED: 54pcs 3W high power LED, high brightness with an average lifetime as 50, 000hrs
 4. Beam Angle: 15/25
 5. Operation Mode: DMX, Master/slave, Auto
 6. DMX 512 control channel: 8CH
 7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
 8. Packing Size: 265*265*380mm
 9. G. W: 3.15KG
- RGB 3IN1 Optional



中文参数

1. 电压: AC100-240V, 50/60HZ
 2. 消耗功率: 180W
 3. LED: 54颗3W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
 4. 光束角度: 15/25
 5. 运行方式: DMX, 主副机, 自走
 6. DMX 512控制通道: 4通道/8通道可选
 7. 高档LED显示屏
 8. 其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
 9. 包装尺寸: 325*325*350mm
 10. 毛重: 8.9KG
 11. 防水等级: IP65
- RGB三合一灯珠可选

Product features

1. Voltage: AC100-240V, 50/60Hz
 2. Power Consumption: 180W
 3. LED: 54pcs 3W LED, high brightness with an average lifetime as 50, 000hrs
 4. Beam Angle: 15/25
 5. Operation Mode: DMX, Master/slave, Auto
 6. DMX 512 control channel: 4CH/8CH
 7. LED Display
 8. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
 9. Packing Size: 325*325*350mm
 10. G. W: 8.9KG
 11. IP Rating: IP65
- RGB 3IN1 Optional





HT-LP-723N
72*3W LED不防水帕灯
72*3W LED Indoor Par




HT-LP-723
72*3W LED防水帕灯
72*3W LED Waterproof Par

中文参数

- 1.电压：AC100-240V,50/60HZ
 - 2.消耗功率：250W
 - 3.LED：72颗3W的大功率LED, 高亮度，低能耗，平均寿命达50,000小时
 - 4.光束角度：15/25
 - 5.运行方式：DMX，主副机，自走
 - 6.DMX 512控制通道：4通道/8通道可选
 - 7.高档LED显示屏
 - 8.其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
 9. 包装尺寸: 285*285*380mm
 10. 毛重:3.6KG
- RGB三合一灯珠可选

Product features

1. Voltage: AC100-240V, 50/60Hz
 2. Power Consumption: 250W
 3. LED: 72pcs 3W LED, high brightness with an average lifetime as 50, 000hrs
 4. Beam Angle: 15/25
 5. Operation Mode: DMX, Master/slave, Auto
 6. DMX 512 control channel: 4CH/8CH
 7. LED Display
 8. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
 9. Packing Size: 285*285*380mm
 10. G. W: 3.6KG
- RGB 3IN1 Optional

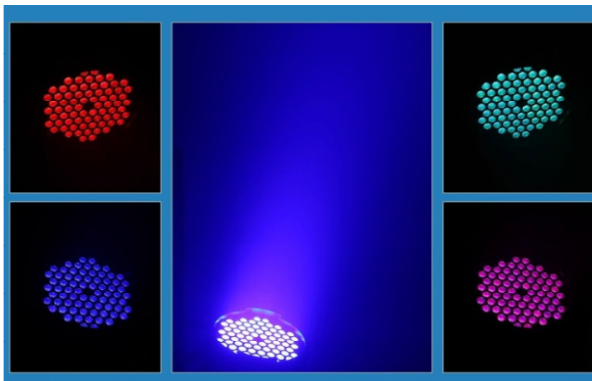

中文参数

- 1.电压：AC100-240V,50/60HZ
- 2.消耗功率：250W
- 3.LED：72颗3W的大功率LED, 高亮度，低能耗，平均寿命达50,000小时
- 4.光束角度：15/25
- 5.运行方式：DMX，主副机，自走
- 6.DMX 512控制通道：4通道/8通道可选
- 7.高档LED显示屏
- 8.其他功能: 无极混色, 颜色渐变, 颜色跳变, 调光, 频闪
- 9.包装尺寸：290*290*340mm
- 10.毛重：7.2KG
11. 防水等级: IP65

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 250W
3. LED: 72pcs 3W LED, high brightness with an average lifetime as 50, 000hrs
4. Beam Angle: 15/25
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 4CH/8CH
7. LED Display
8. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
9. Packing Size: 290*290*340mm
10. G. W: 7.2KG
11. IP rating: IP65



HT-LP-450N
4*50W LED不防水四眼面光灯
4*50W LED Indoor 4-eye Par




HT-LP-450
4*50W LED防水四眼面光灯
4*50W LED Waterproof 4-eye Par

中文参数

- 1.电压: AC100-240V,50/60HZ
- 2.消耗功率: 200W
- 3.LED: 4颗50W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.色温:3200-6500k
- 5.发光角度: 15°、24°、36°可选
- 6.运行方式: DMX, 主副机, 自走
- 7.DMX 512控制通道: 8通道
- 8.外壳: 铸铝
- 9.包装尺寸: 265*265*300mm
- 10.净重: 3.15kg

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 200W
3. LED: 4pcs 50W LED, high brightness with an average lifetime as 50, 000hrs
4. Color temperature: 3200-6500k
5. Beam angle: 15°、24°、36° optional
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 8CH
8. Light body: Casting aluminium
9. Packing size: 265*265*300mm
10. Net Weight: 3.15kg

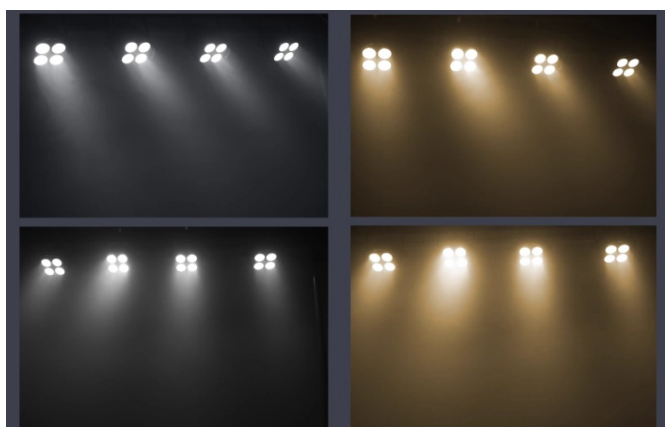


中文参数

- 1.电压: AC100-240V,50/60HZ
- 2.消耗功率: 200W
- 3.LED: 4颗50W的大功率LED, 高亮度, 低能耗, 平均寿命达50,000小时
- 4.色温:3200-6500k
- 5.发光角度: 15°、24°、36°可选
- 6.运行方式: DMX, 主副机, 自走
- 7.DMX 512控制通道: 8通道
- 8.外壳: 铸铝
- 9.包装尺寸: 265*265*300mm
- 10.毛重: 6.9KG
- 11.防水等级: IP65

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 200W
3. LED: 4pcs 50W LED, high brightness with an average lifetime as 50, 000hrs
4. Color temperature: 3200-6500k
5. Beam angle: 15°、24°、36° optional
6. Operation Mode: DMX, Master/slave, Auto
7. DMX 512 control channel: 8CH
8. Light body: Casting aluminium
9. Packing size: 265*265*300mm
10. Net Weight: 6.9kg
11. IP Rating: IP65

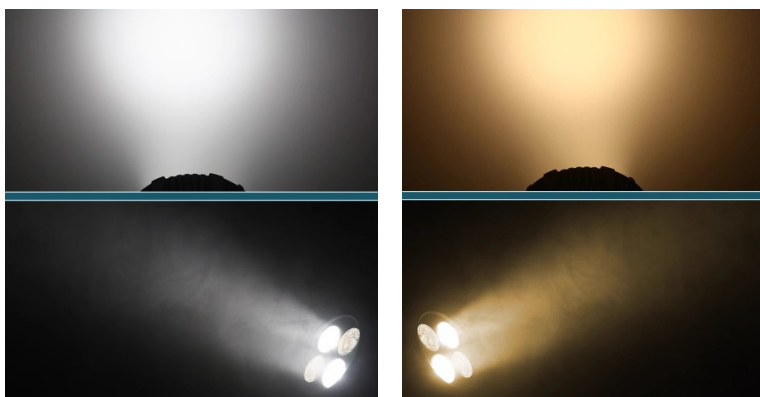



HT-LP-200W HT-LP-200Q
1*200W LED不防水COB帕灯
1*200W LED Indoor COB Par



HT-LP-100WIP HT-LP-200WIP
1*100W/1*200W LED防水COB帕灯
1*100W/1*200W LED Waterproof COB Par

中文参数

1. 电压: AC100-240V, 50-60Hz
2. 消耗功率: 200W
3. 光源: 1颗200W暖白(3000K)灯珠或1颗200W冷白(5700K)灯珠 for HT-LP-200W
1颗200瓦RGBA四合一灯珠 for HT-LP-200Q
4. 光束角度: 40°, 50° (可选择使用)
5. 控制: DMX512, 自走, 主从控制
6. DMX512通道: 2通道 for HT-LP-200W
8通道 for HT-LP-200Q
7. 功能: 混色, 颜色跳变, 颜色渐变, 调光, 频闪
8. 包装尺寸: 265*265*380mm
9. 毛重: 3.6kg

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power Consumption: 200W
3. LED: 1 x 200W warm white LED (3000K) or 1 x 200W cool white LED (5700K) for HT-LP-200W
1 x 200W quad-colour LED (RGBW) for HT-LP-200Q
4. Beam Angle: 40/50
5. Operation Mode: DMX, Master/slave, Auto
6. DMX 512 control channel: 2CH for HT-LP-200W
8CH for HT-LP-200Q
7. Functions: Color mixing, Color change, Color fade, Dimmer, Strobe
8. Packing Size: 265*265*380mm
9. G. W: 3.6KG



中文参数

1. 电压: AC100-240V 50HZ/60HZ
2. 功率: 100W / 200W
3. 光源: 1*100w或者1*200W COB灯珠
4. 发光角度: 30°、60°可选
5. 控制模式: DMX/主从/自走
6. 通道: 3CH
7. 外壳: 铸铝
8. 包装尺寸: 250*265*270mm
9. 净重: 4.15kg
10. 防水等级: IP65 (户外使用)

Product features

1. Voltage: AC100-240V 50HZ/60HZ
2. Power consumption: 100W /200W
3. Light source: 1*100W or 1*200W COB led
4. Beam angle: 30°、60° optional
5. Operation Mode: DMX, Master/Slave, Auto
6. DMX channels: 3CH
7. Light body: Casting aluminium
8. Packing size: 250*265*270mm
9. Net Weight: 4.15kg
10. IP Rating: IP65 (Outdoor use)



HT-LP-3110N
31*10W LED 车展灯
31*10W LED exhibition lights



HT-LPro-200W
1*200W LED成像灯
1*200W LED profile light

中文参数

1. 电压: AC100-240V 50HZ/60HZ
2. 功率: 400W
3. 光源: 31*10w进口科锐灯珠
4. 控制模式: DMX/主从/自走
5. 通道: 2CH
6. 外壳: 铸铝
7. 包装尺寸: 420*240*240mm
8. 净重: 8.28kg (含遮光叶1.48KG)
9. 使用场所: 车展、发布会等场所

Product features




1. Voltage: AC100-240V 50HZ/60HZ
2. Power consumption: 400W
3. Light source: 31*10w Cree led
4. Operation Mode: DMX, Master/Slave, Auto
5. DMX channels: 2CH
6. Light body: Casting aluminium
7. Packing size: 420*240*240mm
8. Net Weight: 8.28kg (with barn door 1.48KG)
9. Using for car exhibition

中文参数

1. 电压: AC100-240V, 50-60HZ
2. 光源: 200W 白色灯珠, 3200k /6000k 色温可选
3. 消耗功率: 250W
4. 显色指数: CRI>=90
5. 光束角度: 19/26/36/50
6. 运行模式: DMX/主从/自走
7. 通道: 1CH/3CH
8. 功能: 调焦, 光圈, 频闪
9. 产品尺寸: 270*185*650mm
10. 净重: 6.9KG

Product features

1. Voltage: AC100-240V, 50-60HZ
2. Light Source: 200W white led, 3200k /6000k optional
3. Power Consumption: 250W
4. CRI>=90
5. Beam angle: 19/26/36/50
6. Operation Mode: DMX, Master/Slave, Auto
7. DMX Channels: 1CH/3CH
8. Function: focus, iris, strobe
9. Product Size: 270*185*650mm
10. Net Weight: 6.9KG

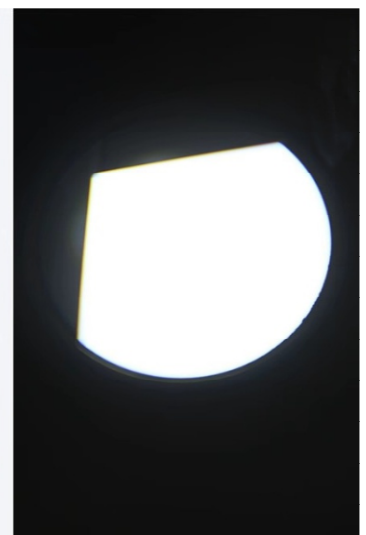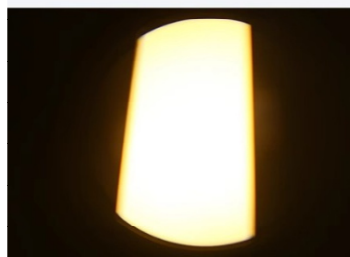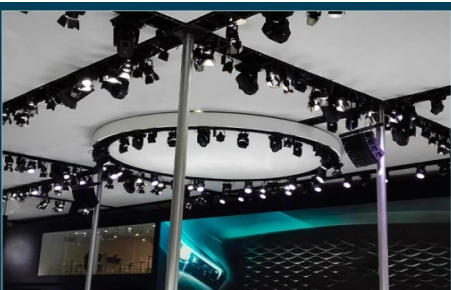




HT-TS-200
1*200W LED影视聚光灯
1*200W LED theatre spot



HT-LF-432
LED平板会议灯
LED flat conference light

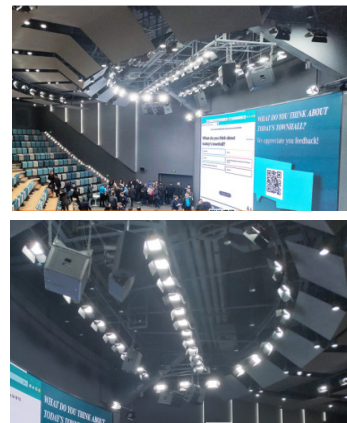

中文参数

1. 电压: AC100-240V 50HZ/60HZ
2. 功率: 200W
3. 光源: 1PCS 200W冷白或暖白色LED
4. 照射角度为40-80°
5. 显色指数Ra>90
6. 控制模式: DMX/主从/自走
7. 通道: 2CH
8. 产品尺寸: 335 * 205 * 450mm
9. 净重: 6.3KG
10. 适用于: 新闻采访、演播室、摄影棚, 会议室等

Product features

1. Voltage: AC100-240V 50HZ/60HZ
2. Power consumption: 200W
3. Light source: 1x200W Cool white or Warm white LED
4. Beam angle: 40-80 °
5. Color rendering index Ra>90
6. Operation Mode: DMX, Master/Slave, Auto
7. DMX channels: 2CH
8. Packing size: 335 * 205 * 450mm
9. Net Weight: 6.3kg
10. Suitable for: interviews, studios, conference rooms etc

中文参数

- 1.输入电压: AC100-240V,50/60Hz
- 2.最大消耗功率:150W
- 3.光源类型: 432颗贴片灯珠, 色温3200K-6400K (±200K) 可选, 暖白正白冷白双色温可选, 显色指数Ra≥90
- 4.控制方式: DMX512, 主/从机, 自走, 声控
- 5.通道数:3通道模式
- 6.调光:0-100%线性平滑调光, 光线均匀、柔和。
- 7.频闪:1-25次/秒
- 8.包装尺寸: 540 * 280 * 130mm
- 9.毛重:9Kg
- 10.适用场地: 演播室、会议室、多功能媒体、微电影拍摄、商业拍摄。

Product features

1. Voltage: AC100-240V,50/60Hz
2. Power consumption: 150W
3. Light source: 432PCS SMD 5050, Color temperature 3200K-6400K (±200K) optional, WW/W/CW/WW&CW optional, CRI Ra≥ 90
4. Operation Mode: DMX512, Master/Slave, Auto, Sound
5. DMX channels: 3CHS
6. Dimmer: 0-100%, light output uniform and soft.
- 7.Strobe:1-25HZ
8. Packing size: 540 * 280 * 130mm
9. G.W: 9Kg
10. Applicable venues: studios, conference rooms, multifunctional media, microfilm shooting, commercial shooting.

Optional accessories:

1.5meter expansion hinge

Stand

Embedded case






HT-Panel 1
嵌入式电动翻转平板会议灯
Embedded electric flip panel conference light



HT-LF-1083
LED天排灯/地排灯
LED flood light

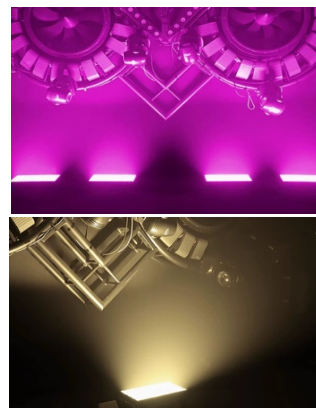

中文参数

- 1.输入电压: AC220V/50HZ
- 2.功率: 100W
- 3.灯珠: 数量1080颗, 寿命5万小时
- 4.显色指数: $Ra \geq 90$
- 5.色温: 3200K/5600K或2900K-5800K可选, ± 150
- 6.光学系统: 100%线性调光绝无频闪无噪音
- 7.出光角度: 120°
- 8.翻转角度: $0-60^\circ$
- 9.冷却系统: 自然风冷散热
- 10.操作: 数码显示管控制地址码
- 11.控制协议: DMX512控制
- 12.通道模式: 单色1个通道, 双色4个通道
- 13.信号线: 信号线三芯卡侬头输入, 信号线三芯卡侬座输出
- 14.操作温度: $-20 \sim +50^\circ\text{C}$
存放温度: $-20 \sim +60^\circ\text{C}$
- 15.外壳: 金属外壳
- 16.颜色: 白色
- 17.开孔尺寸: 500*500MM
外径: 600*600MM

Product features

- 1.Input voltage: AC220V/50HZ
- 2.Power: 100W
- 3.LEDs: 1080pcs, lifespan 50000 hours
- 4.Color rendering index: $Ra \geq 90$
- 5.Color temperature: 3200K/5600K or 2900K-5800K optional, ± 150
- 6.Optical system: 100% linear dimming without flicker or noise
- 7.Light angle: 120°
- 8.Flip angle: $0-60^\circ$
- 9.Cooling system: natural air cooling and heat dissipation
- 10.Operation: Digital display tube to set the address
- 11.Control protocol: DMX512 control
- 12.Channel mode: 1 channel for ww/cw and 4 channels for 2in1
- 13.Signal: Three core XLR input, three core XLR socket output
- 14.Operating temperature: $-20 \sim +50^\circ\text{C}$
Storage temperature: $-20 \sim +60^\circ\text{C}$
- 15.Shell: Metal shell
- 16.Color: White
- 17.Opening size: 500 * 500MM
Outer diameter: 600 * 600MM

中文参数


- 1.输入电压: AC100-240V, 50/60Hz
- 2.最大消耗功率: 400W
- 3.光源类型: 108颗3W, 36R+36G+36B或纯白光高低色温 (高色温36颗低色温72颗)
- 4.光束角度: 60°
- 5.控制方式: DMX512, 主/从机, 自走, 声控
- 6.通道数: 3/7通道模式
- 7.调光: 0-100%线性平滑调光
- 8.频闪: 1-25次/秒
- 9.包装尺寸: 540 * 280 * 130mm
- 10.毛重: 9Kg
适用于剧场、演播厅等

Product features

- 1.Voltage: AC100-240V, 50/60Hz
- 2.Power consumption: 400W
- 3.Light source: 108x3W, 36R+36G+36B or 36CW + 72WW
- 4.Beam angle: 60°
- 5.Operation Mode: DMX512, Master/Slave, Auto, Sound
- 6.DMX channels: 3/7CHS
- 7.Dimmer: 0-100%
- 8.Strobe: 1-25HZ
- 9.Packing size: 540 * 280 * 130mm
- 10.G.W: 9Kg
Using for theatre, studio etc



HT-LS-3K RGB
全彩折叠频闪灯
RGB foldable strobe

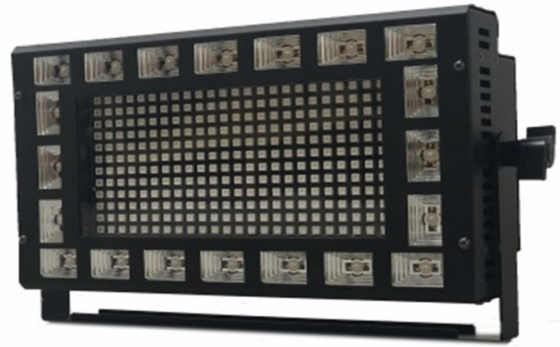

HT-LS-12UV
全彩频闪灯+UV二合一
RGB strobe & UV 2in1

中文参数

- 1) 光源: 324颗0.5W SMD 5030 灯珠,红绿蓝三合一
- 2) 控制模式: DMX,主副机, 音控, Art-Net (可选)
- 3) DMX通道: 3/ 5/8/ 54/59通道
- 4) 液晶显示屏, 实现友好操作界面
- 5) 频闪0-20HZ
- 6) 面光灯
- 7) 红绿蓝无极混色
- 8) 跑马灯效果: 18段跑马和随机频闪效果
- 9) 创新结构实现洗墙灯、面光灯和频闪灯轻松变换
- 10) 电源座进出
- 11) 三芯信号卡龙座进出, 网线接口进出 (可选)
- 12) 电压: AC100-240V,50/60HZ
- 13) 消耗功率: 160W
- 14) 灯具尺寸: 洗墙灯: 1002 x 124 x 188 mm
面光灯: 388 x 212 x 188 mm
- 15) 净重: 3.9kgs

Product features

- 1.) Light Source : 324 pcs x 0.5W SMD 5030 leds, RGB 3IN1
- 2.) Control Mode – DMX, Master/Slave, and Sound Active, Art-Net (optional)
- 3.) DMX channels – 3/ 5/8/ 54/59 Ch.
- 4.) LCD display for easy navigation
- 5.) strobe 0~20Hz
- 6.) Stage Blinder
- 7.) RGB color mixing
- 8.) Chaser – 18 section control, delivering chase & dynamic random effects
- 9.) Innovated mechanical design for Strobe, Blinder and linear chase effects
- 10.) Powercon in/out
- 11.) 3 Pin XLR in/out & RJ45 in/out
- 12.) Power : AC 100 ~240V, 50/60Hz
- 13.) Power consumption: 160W
- 14.) Size: Linear Bar - 1002 x 124 x 188 mm
Panel – 388 x 212 x 188 mm
- 15.) Weight: 3.9kgs

中文参数

- 1.) 光源: 288颗SMD 5050 RGB三合一灯珠+20颗3W紫外灯珠
- 2.) 光束角度: 25*35degree (for UV)
- 3.) 控制模式: DMX,主副机,音控,自走
- 4.) DMX通道: 2/3/4/6/9/36/42通道
- 5.) 液晶显示屏,实现友好操作界面
- 6.) 超靚内置程序,音控和主副机适用
- 7.) 超靚调光
- 8.) 3K HZ高刷新率,摄像不抖动
- 9.) 12组控频闪效果外加幽灵紫光效果,夺人眼球
- 10.) 蓝白电源座进出
- 11.) 三芯信号卡龙座进出
- 12.) 电压: AC100-240V,50/60HZ
- 13.) 消耗功率: 200W
- 14.) 双支架适合地面安装和桁架吊挂
- 15.) 灯具尺寸: 385 x 210 x 90 mm
- 16.) 净重: 3.58kgs

Product features

- 1.) Light Source: 288pcs SMD 5050 RGB leds+20pcs 3W UV leds
- 2.) Beam angle: 25*35degree (for UV)
- 3.) Control Mode – DMX, Master/Slave, Sound Active, Auto
- 4.) DMX channels – 2/3/4/6/9/36/42Ch
- 5.) LCD display for easy navigation
- 6.) Excellent built-in light shows, under master/slave triggered by music
- 7.) Nice dimming
- 8.) 3K Hz Scanning frequency, flicker free
- 9.) strobe with 12 section control delivering eye catching effects, special UV effect
- 10.) Powercon in/out
- 11.) 3 Pin XLP in/ out
- 12.) Power : AC 100 ~240V, 50/60Hz
- 13.) Power consumption: 200W
- 14.) Base design good for floor standing and truss rigging
- 15.) Size: 385 x 210 x 90 mm
- 16.) Weight: 3.58kgs



HT-LS-960
全彩频闪灯
RGB strobe



HT-LS-1080IP
全彩防水频闪灯
RGB waterproof strobe

中文参数

- 1、输入电源：AC100~240V / 50~60Hz宽电压；
- 2、消耗功率：266W, 开关电源22V/350W
- 3、LED光源：960颗全彩RGB三合一5050 SMD灯珠；
- 4、控制方式：标准DMX512协议，内置59个效果程序和60个图形，带声控自走模式；声控效果极佳
- 5、通道模式：10CH/87CH/247CH
- 6、80组控频闪效果，80组灯珠可以单独控制
- 7、灯具尺寸：540 X 320 X 205mm
- 8、净重：8kg

Product features

- 1.) Voltage: AC100-240V/50-60HZ
- 2.) Power consumption: 266W, power supply 22V/350W
- 3.) Light source: 960pcs RGB 3IN1 5050 SMD leds
- 4.) Operation mode: DMX512, Master/ slave, Auto, Sound
- 5.) DMX512 channels: 10CHS/87CHS/247CHS
- 6.) Function: 80groups of leds, individually control
- 7.) Size: 540 X 320 X 205mm
- 8.) N.W: 8KG

中文参数

- 1.电源:100-240V 50-60Hz
- 2.总功率：800W
- 3.光源：576颗5050 0.5W 16段，96颗1W白光 8段
- 4.控制模式：DMX,主副机，自走，音控
- 5.通道：8CH/12CH/56CH/68CH
- 6.液晶显示屏，实现友好操作界面
- 7.调光：0-100%
- 8.频闪0-20HZ
- 9.红绿蓝无极混色，超强混色效果
- 10.跑马灯效果：全彩16段跑马，白光8段跑马
- 11.随机频闪效果
- 12.特色:染色，灯带，爆闪三合一
- 13.防水电源线进出和信号线进出
- 14.灯具尺寸：485*138*340mm
- 15.净重：12.8kg

Product features

1. Power supply: 100-240V 50-60Hz
2. Total power consumption: 800W
3. Light source: 576pcs 5050 RGB 3IN1 0.5W LEDs 16pixels, 96pcs 1W white LEDs 8pixels
4. Control mode: DMX, Master/Slave, Auto and Sound
5. Channel: 8CH/12CH/56CH/68CH
6. LCD display screen, achieving friendly user interface
7. Dimming: 0-100%
8. Strobe 0-20Hz
9. Red green blue infinite color mixing, super strong color mixing effect
10. Chaser Effect: Full color 16pixel, white light 8pixels
11. Random strobe effect
12. Features: wash, chase, strobe 3in1
13. Waterproof power in/out and DMX in/out
14. Lighting size: 485*138*340mm
15. Net weight: 12.8kg



HT-LS-960 IP
防水全彩频闪灯
Waterproof RGB strobe



HT-LS-1120
全彩频闪灯
RGB strobe

中文参数

- 1.输入电源: AC100~240V / 50~60Hz宽电压;
- 2.消耗功率: 400W
- 3.LED光源: 960颗0.5W全彩RGB三合一5050 SMD灯珠; 324颗2W白光SMD灯珠
- 4.控制方式: DMX512、自走、主从、声控、带RDM功能
- 5.通道: CH06、CH13、CH18、CH78,CH156, CH158
- 6.调光: 32bit 0~100%线性调光
- 7.特点: 爆闪+染色+内置程序
- 8.工作温度: -30度~50度
- 9.频闪频率: 1~30HZ
- 10.外观: 金属、黑色
- 11.连接方式: DMX512输入输出 / 电源输入输出。
- 12.IP 等级: IP65

Product features

1. Voltage: AC100~240V/50~60Hz wide voltage;
2. Power consumption: 400W
3. LED light source: 960pcs 0.5W full-color RGB 3in1 5050 SMD LEDs; 324pcs 2W white SMD leds
4. Control mode: DMX512、 auto, master-slave, sound, RDM function
5. Channel: CH06、CH13、CH18、CH78,CH156, CH158
6. Dimming: 32-bit 0~100% linear dimming
7. Features: Flashing+Staining+Built in Program
8. Working temperature: -30 ° C~50 ° C
9. Strobe frequency: 1~30HZ
10. Appearance: Metal, black
11. Connection method: DMX512 input/output, power input/output.
12. IP rating: IP65

中文参数


- 1.电源:100-240V 50-60Hz
- 2.总功率: 350W(RGB:130W,W:220W)
- 3.光源: 256颗3030白光1瓦,864颗5050 RGB三合一0.2瓦灯珠
- 4.控制模式: DMX,主副机, 自走, 音控
- 5.通道: CH04、CH17、CH145
- 6.液晶显示屏, 实现友好操作界面
- 7.调光: 32bit 0~100%线性调光
- 8.频闪0-30HZ
- 9.红绿蓝无极混色, 超强混色效果
- 10.随机频闪效果
- 11.特色:96段RGB+32段W+染色+爆闪
- 12.外观: 金属、黑色
- 13.连接方式: DMX512输入输出 / 电源输入输出。
- 14.IP 等级: IP20

Product features

1. Voltage: AC100-240V 50-60Hz
2. Power consumption: 350W (RGB: 130W, W: 220W)
3. Light source: 256pcs 3030 white light 1 watt, 864pcs 5050 RGB 3in1 0.2 watt LEDs
4. Control mode: DMX, Master/Slave, Auto, Sound control
5. Channel: CH04、CH17、CH145
6. LCD display screen for a user-friendly interface
7. Dimming: 32-bit 0~100% linear dimming
8. Strobe: 0-30HZ
9. Red green blue infinite color mixing, super strong color mixing effect
10. Random strobe effect
11. Features: 96 segment RGB+32 segment W + washing + flashing
12. Housing: Metal, black
13. Connection method: DMX512 input/output, Power input/output.
14. IP rating: IP20



HT-LS-1008
全彩频闪长条灯
RGB strobe bar

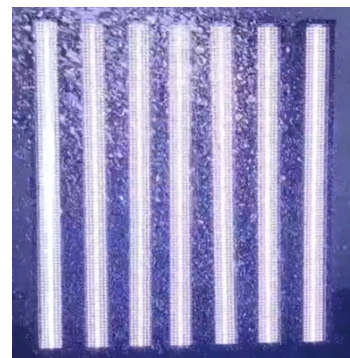

HT-LS-672IP
全彩防水长条频闪灯
RGB waterproof strobe bar

中文参数

- 1.电源: AC100-240V 50-60Hz
- 2.总功率: 150W
- 3.光源: 864颗5050三色LED灯珠
- 4.控制模式: DMX,主副机, 自走, 音控
- 5.通道: C003、C009、C162、C168
- 6.液晶显示屏, 实现友好操作界面
- 7.调光: 32bit 0~100%线性调光
- 8.频闪0-30HZ
- 9.特色:216段跑马+染色+爆闪
- 10.外观: 金属、黑色
- 11.连接方式: DMX512输入输出 / 电源输入输出。
- 12.IP 等级: IP20
- 13.产品尺寸: 100*8*16/cm
单包尺寸: 104*13*15/cm
外包尺寸: 105*29*33/cm (一装四)
- 14.产品净重: 4kg

Product features

- 1.) Light Source : 1008 pcs SMD5050 high brightness RGB 3IN1 LEDs
- 2.) Up to 10kHz dimming refresh PWM frequency, camera shooting without flicker
- 3.) Control Mode – DMX, Master/Slave, Auto and Sound Active
- 4.) DMX channels – 10/79/216/221CH
- 5.) LCD display for easy navigation
- 6.) Function: 72 section control, Excellent color mixing, Dimmer (0-100%), Strobe(0—20Hz), Building in super rich built-in programs (59) and patterns (60), with RDM function
- 7.) Powercon in/out
- 8.) 3 Pin XLR in/ out
- 9.) Power : AC 100 ~240V, 50/60Hz
- 10.) Power consumption: 268W
- 11.) Size: 1012*117*128.6mm

中文参数

- 1.电源:100-240V 50-60Hz
- 2.总功率: 450W
- 3.光源: 672颗5050 0.5W 32段, 112颗1W白光 16段
- 4.控制模式: DMX,主副机, 自走, 音控
- 5.通道: 14CH/54CH/112CH
- 6.液晶显示屏, 实现友好操作界面
- 7.调光: 0-100%
- 8.频闪0-20HZ
- 9.红绿蓝无极混色, 超强混色效果
- 10.跑马灯效果: 全彩32段跑马, 白光16段跑马
- 11.随机频闪效果
- 12.特色:染色, 灯带, 爆闪三合一
- 13.防水电源线进出和信号线进出
- 14.灯具尺寸: 1010*195*130mm
- 15.净重: 7kg

Product features

1. Power supply: 100-240V 50-60Hz
2. Total power consumption: 450W
3. Light source: 672pcs 5050 RGB 3IN1 0.5W LEDs 32pixels, 112pcs 1W white LEDs 16pixels
4. Control mode: DMX, Master/Slave, Auto and Sound
5. Channel: 14CH/54CH/112CH
6. LCD display screen, achieving friendly user interface
7. Dimming: 0-100%
8. Strobe 0-20Hz
9. Red green blue infinite color mixing, super strong color mixing effect
10. Chaser Effect: Full color 32pixel, white light 16pixels
11. Random strobe effect
12. Features: wash, chase, strobe 3in1
13. Waterproof power in/out and DMX in/out
14. Lighting size: 1010 * 195 * 130mm
15. Net weight: 7kg



HT-LW-3K RGBW

全彩折叠洗墙灯

RGBW 4IN1 foldable LED wall wash



HT-LW-1415M

14x15W 全彩防水洗墙灯

14x15W RGBWA 5IN1 waterproof LED wall wash

中文参数

- 1) 光源: 12颗欧司朗15W红绿蓝白四合一灯珠
- 2) 光束角度范围: 22.3度
- 3) 控制模式: DMX, Art-Net, 主副机和音控
- 4) DMX通道: 4/6/10/54通道
- 5) 液晶显示屏, 实现友好操作界面
- 6) 洗墙灯
- 7) 面光灯
- 8) 带点控功能超正混色效果
- 9) 创新机械结构实现洗墙灯和面光灯轻松变换
- 10) 蓝白电源座进出
- 11) 三芯信号卡龙座进出及网线接口进出
- 12) 电压: AC100-240V, 50/60HZ
- 13) 消耗功率: 180W
- 14) 灯具尺寸: 洗墙灯: 1002 x 170 x 176 mm
面光灯: 394 x 212 x 176 mm
- 15) 净重: 4.5kgs

Product features

- 1.) Light Source : 12 pcs x 15 W Quad leds (RGBW)
- 2.) Beam angle : 22.3 degree
- 3.) Control Mode – DMX, Art-Net, Master/Slave, and Sound Active
- 4.) DMX channels – 4/ 6/ 10/ 54 Ch.
- 5.) LCD display for easy navigation
- 6.) Wall Washer
- 7.) Flood Wash effects
- 8.) Excellent color mixing with pixel control
- 9.) Innovated mechanical design for Linear Bar(wall wash) or Panel(flood) application
- 10.) Powercon in/out
- 11.) 3 Pin XLR in/ out & RJ45 in/ out
- 12.) Power : AC 100 ~240V, 50/60Hz
- 13.) Power consumption: 180W
- 14.) Size: Linear Bar - 1002 x 170 x 176 mm
Panel – 394 x 212 x 176 mm
- 15.) Weight: 4.5kgs

中文参数


一款完美产品适用于各种活动、租赁和舞台, 具有超强红绿蓝白琥珀色混色效果。

- 1) 光源: 14颗15W红绿蓝白四合一灯珠
- 2) 光束角度范围: 25度
- 3) 控制模式: DMX, 主副机, 自走和音控
- 4) DMX通道: 10/ 24/ 70/ 80 通道
- 5) LED显示屏, 实现友好操作界面
- 6) 功能: 洗墙灯, 带点控功能超正混色效果
- 7) 电源线进出
- 8) 三芯信号线进出
- 9) 电压: AC100-240V, 50/60HZ
- 10) 消耗功率: 210W
- 11) 包装尺寸: 1080 x 370 x 240 mm (2台)
- 12) 毛重: 17.7kgs (2台)

Product features

A perfect tool for events, rentals & stages, delivering wall washer with super color mixing of RGBWA.

- 1.) Light Source : 14 pcs x 15 W RGBWA 5IN1 leds
- 2.) Beam angle : 25 degree
- 3.) Control Mode – DMX, Master/Slave, Auto and Sound Active
- 4.) DMX channels – 10/ 24/ 70/ 80 Ch.
- 5.) LED display for easy navigation
- 6.) Effects: Wall Washer, Excellent color mixing with pixel control
- 7.) Power cable in/out
- 8.) 3 Pin dmx cable in/ out
- 9.) Power : AC 100 ~240V, 50/60Hz
- 10.) Power consumption: 210W
- 11.) Packing Size: 1080*370*240mm (For 2pcs)
- 12.) Gross Weight: 17.70kg (For 2pcs)

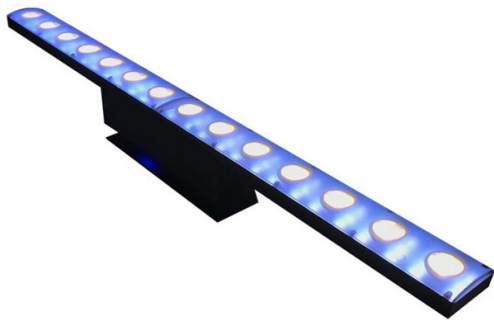

HT-LW-143T

14x3W 点阵变色龙带彩色背景

14x3W Matrix Chameleon with RGB background



HT-LW-143W

14x3W 黄金变色龙

14x3W Golden Matrix Chameleon

中文参数

- 1) 光源: 14颗3W暖白灯珠, 加56颗SMD 5050红绿蓝三合一灯珠
- 2) 光束角度范围: 6度
- 3) 控制模式: DMX,主副机,自走和音控
- 4) DMX通道: 6/8/12/60 通道
- 5) LED显示屏, 实现友好操作界面
- 6) 点控追光
- 7) 超亮光束带背景
- 8) 电源线进出
- 9) 三芯信号线进出
- 10) 电压: AC100-240V,50/60HZ
- 11) 消耗功率: 80W
- 12) 包装尺寸: 1080 x 370 x 240 mm (2台)
- 13) 毛重: 7.4kgs (2台)

Product features

- 1.) Light Source : 14 pcs x 3 W warm white leds, plus 56pcs SMD 5050 RGB 3IN1 leds
- 2.) Beam angle : 6 degree
- 3.) Control Mode – DMX,Master/Slave, Auto and Sound Active
- 4.) DMX channels – 6CH/8CH/12CH/60CH
- 5.) LED display for easy navigation
- 6.) pixel chaser
- 7.) Excellent beam with background color
- 8.) Power cable in/out
- 9.) 3 Pin dmx cable in/ out
- 10.) Power : AC 100 ~240V, 50/60Hz
- 11.) Power consumption: 80W
- 12.) Packing Size: 1080*370*240mm (For 2pcs)
- 13.) Gross Weight: 7.40kg (For 2pcs)

中文参数



- 1) 输入电压: AC220V 50/60HZ
- 2) 额定功率: 200w
- 3) 光源: 14x5W CREE暖白点阵灯
- 4) 发光角度: 5度
- 5) 调光: 0-100%线性调光
- 6) 通道: 2、14、18通道
- 7) 控制模式: DMX512, 主从, 自走, 声控
- 8) IP:IP20
- 9)净重: 2.6KG
- 10)包装尺寸: 108x29x39CM
- 11)适用场所: 酒吧夜场做效果

Product features

- 1.) Input voltage: AC220V 50/60HZ
- 2.) Rated power: 200W
- 3.) Light source: 14pcs 5W CREE warm white dot matrix lamp
- 4.) Luminous Angle: 5 degrees
- 5.) Dimming: 0-100% linear dimming
- 6.) Channels: 2, 14 and 18 channels
- 7.) Control mode: DMX512, Master-slave, Auto, Sound
- 8.) IP: IP20
- 9.) Net weight: 2.6 KG
- 10.) Packing size: 108 x 29 x 39CM
- 11.) Applicable place: bar night scene makes the effect



HT-LW-12WS
12x3W矩阵频闪跑马灯三合一
12x3W strobe, wash and chaser 3in1

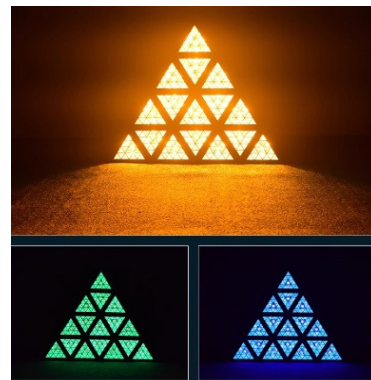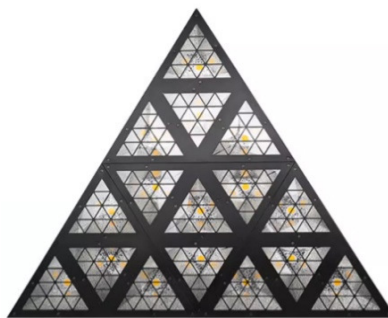


HT-Triangle
16x30W三角背景灯
16x30W Triangle Background Light

中文参数

1. 电压: AC100-240v,50/60Hz
2. 功率: 150W
3. 灯珠:
(外圈) 96颗0.2W LED RGB SMD
(中心) 12*3w 科锐暖白光束
(频闪) 156颗0.5W SMD冷白频闪灯珠
4. 灯珠使用寿命: > 60,000小时
5. 发光角度: 4°
6. 运行模式: DMX, 主副机, 自走, 音控
7. DMX通道: 5/7/13/73/75/86
8. 功能: 频闪、染色、跑马点控三合一
9. 产品尺寸: 1000*80*150mm
10. 净重: 8KG

Product features

1. Voltage: AC100-240v,50/60Hz
2. Power consumption: 150W
3. LEDs:
(Outer circle) 96 * 0.2W LED RGB SMD
(Center) 12 * 3W Cree Warm White
(Strobe) 156 * 0.5W SMD cool white SMD
4. Lamp lifespan:>60000 hours
5. Beam angle: 4°
6. Operation mode: DMX, Master/Slave, Auto, Sound
7. DMX channels: 5/7/13/73/75/86CH
8. Function: strobe, wash and chaser 3in1
9. Product size: 1000 * 80 * 150mm
10. Net weight: 8KG

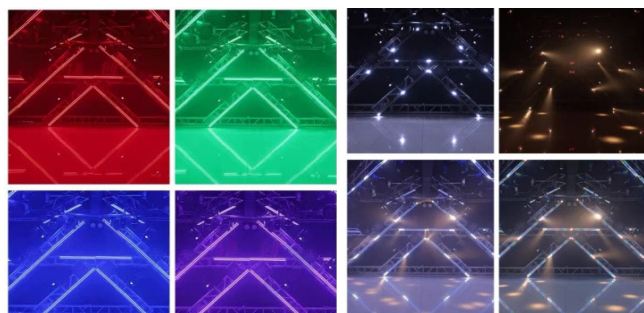

中文参数

- 1.电压: AC110-220V±10%/ 50-60HZ
- 2.功率: 450W
- 3.主光: 16*30W 金黄色LED灯珠
辅光: 576*0.3W红绿蓝LED灯珠
- 4.控制方式: DMX512, 主/从模式, 声控模式, 支持RDM
- 5.通道: 4/6/12/21/64/76CH
- 6.尺寸: 700*800*200mm
- 7.重量: 8.0KG
- 8.特点: 主光使用16颗30W 1800金黄色LED灯珠, 辅光使用576颗0.3W三合一LED灯珠, 灯珠分16模组单独可控, 效果出众生动。用户可将多个灯具进行无缝拼接, 通过专业编程, 可给舞台带来更炫目更多精彩的效果。
- 9.产品设计有合理的LED刷新频率, 无闪烁, 特别适合用于电视演播厅和摄影, 大型演唱会

Product features

1. Voltage: AC110-220V ± 10%/50-60HZ
2. Power consumption: 450W
3. Light source: 16 * 30W golden LEDs
Auxiliary light: 576 * 0.3W RGB 3IN1 LEDs
4. Control mode: DMX512, Master/slave, sound, support for RDM
5. Channel: 4/6/12/21/64/76CH
6. Size: 700 * 800 * 200mm
7. Weight: 8.0KG
8. Features: The main light uses 16pcs 30W golden LEDs, with 576 0.3W 3in1 LEDs for auxiliary light. The LEDs are divided into 16 modules and can be individually controlled, resulting in outstanding and vivid effects. Users can seamlessly assemble multiple lighting fixtures, and through professional programming, they can bring more dazzling and colorful effects.
9. The product is designed with a reasonable LED refresh rate and no flickering, making it particularly suitable for use in television studios, photography, and large-scale concerts



HT-LW-363W
36x3W 矩阵灯
36x3W Matrix



HT-LW-7210Q
72x10W RGBW 4IN1 LED城市之光
72x10W RGBW 4IN1 LED city color


中文参数

- 1) 光源: 36颗3W暖白灯珠
 - 2) 光束角度范围: 3度
 - 3) 控制模式: DMX,主副机,自走和音控
 - 4) DMX通道: 3CH/36CH
 - 5) LCD显示屏, 实现友好操作界面
 - 6) 点控追光
 - 7) 超亮光束
 - 8) 电源线进出
 - 9) 三芯信号线进出
 - 10) 电压: AC100-240V,50/60HZ
 - 11) 消耗功率: 120W
 - 12) 产品尺寸: 500*500*35mm
 - 13) 静重: 4.6.kg
- RGB三合一, RGBW四合一可选

Product features

- 1.) Light Source : 36 pcs x 3 W Warm white leds
- 2.) Beam angle : 3 degree
- 3.) Control Mode – DMX,Master/Slave, Auto and Sound Active
- 4.) DMX channels – 3CH/36CH
- 5.) LCD display for easy navigation
- 6.) pixel chaser, matrix
- 7.) Excellent beam
- 8.) Power cable in/out
- 9.) 3 Pin dmx cable in/ out
- 10.) Power : AC 100 ~240V, 50/60Hz
- 11.) Power consumption: 120W
- 12.) Product Size: 500*500*35mm
- 13.) Net Weight: 4.6kg

RGB 3in1, RGBW 4in1 optional

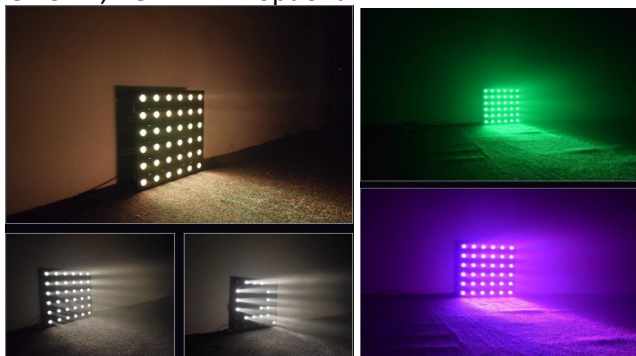

中文参数

- 1). 电压: AC100-240V / 50-60HZ
- 2). 光源: 72颗10W RGBW四合一LEDs
- 3). 消耗功率: 720W
- 4). 运行模式: DMX, 主副机, 自走, 音控
- 5). DMX通道: 4CH/8CH/12CH
- 6). 三芯电源 & 信号输入/输出
- 7). 产品尺寸: 470x518x520mm
- 8). 净重: 26kgs
- 9). 包装尺寸: 1110x645x570mm
- 10). 毛重: 79kgs (两只装航空箱)

Product features

- 1). Voltage: AC100-240V / 50-60HZ
- 2). Light source: 72pcs 10W RGBW 4IN1 LEDs, high brightness
- 3). Power consumption: 720W
- 4). Operation mode: DMX, Master/Slave, Auto, Sound
- 5). DMX Channels: 4CH/8CH/12CH
- 6). 3-Pin Power & XLR input/output
- 7). Product Size: 470x518x520mm
- 8). Net Weight: 26kgs
- 9). Packing size: 1110x645x570mm
- 10). Gross Weight: 79kgs (2in1 flight case)



HT-LW-6010Q IP
60x10W RGBW 4IN1 LED城市之光
60x10W RGBW 4IN1 LED city color



HT-LW-1050Q IP
10x50W 全彩防水洗墙灯带辅光
10x50W RGBW 4IN1 waterproof LED wall wash with background

中文参数

1. 输入电压: AC110V/220V 50HZ/60HZ
2. 总功率: 600W
3. 光源: 60颗10W RGBW四合一灯珠
4. 发光角度: 25度/40度可选
5. 控制模式: DMX512, 主从模式、自走模式
6. 调光: 线性调光 0-100%
7. 频闪: 0-25次/秒
8. 通道: 8CH
9. 高强度压铸铝合金, 钢化玻璃面罩, 0-180度头部手动调节角度
10. 净重: 15KG 毛重: 17KG
11. 产品尺寸: 550*160*380mm
包装尺寸: 750*270*520mm
12. 防护等级: IP65

Product features

1. Voltage: AC110V/220V 50HZ/60HZ
2. Power consumption: 600W
3. Light source: 60 X 10W RGBW 4IN1 LEDS
4. Beam angle: 25degree/40degree
5. Operation Mode: DMX, Master/slave, Auto
6. Dimmer: 0-100%
7. Strobe: 0-25HZ
8. DMX: 8CH
9. Die cast aluminum alloy housing, tempered glass protection, manually adjustable head angle from 0-180 degrees
10. N.W: 15KG G.W: 17KG
11. Product size: 550*160*380mm
Packing size: 750*270*520mm
12. IP Rating: IP65

中文参数

一款完美产品适用于各种活动、租赁、舞台和景观亮化, 具有超强混色效果。

- 1) 光源: 10颗50W红绿蓝白四合一灯珠点控, 196颗5050 0.5W红绿蓝三合一灯珠分28段
- 2) 光束角度范围: 25度
- 3) 控制模式: DMX,主副机,自走和音控
- 4) DMX通道: 11/ 18/ 82/ 100/ 124 通道
- 5) LED显示屏, 实现友好操作界面
- 6) 功能: 洗墙灯, 带点控功能超正混色效果, 带辅光
- 7) 电源线进出
- 8) 三芯信号线进出
- 9) 电压: AC100-240V,50/60HZ
- 10) 消耗功率: 450W
- 11) 包装尺寸: 1080 x 370 x 240 mm (2台)
- 12) 毛重: 17.7kgs (2台)

Product features

A perfect tool for events, rentals, stages & landscape, delivering wall washer with super color mixing of RGBWA.

- 1.) Light Source : 10pcs 50W RGBW 4IN1 leds pixel control, 196pcs 5050 0.5W RGB 3IN1 leds 28sections.
- 2.) Beam angle : 25 degree
- 3.) Control Mode – DMX,Master/Slave, Auto and Sound Active
- 4.) DMX channels – 11/ 18/ 82/ 100/ 124 CH.
- 5.) LED display for easy navigation
- 6.) Effects: Wall Washer, Excellent color mixing with pixel control, Excellent background
- 7.) Power cable in/out
- 8.) 3 Pin dmx cable in/ out
- 9.) Power : AC 100 ~240V, 50/60Hz
- 10.) Power consumption: 450W
- 11.) Packing Size: 1080*370*240mm (For 2pcs)
- 12.) Gross Weight: 17.70kg (For 2pcs)



HT-LB-4100IP
4x100W 防水四眼观众灯
4x100W Waterproof LED 4-eye blinder

中文参数

1. 输入电压: AC110V/220V 50HZ/60HZ
2. 总功率: 400W
3. 光源: 4颗COB100W集成暖光灯珠
4. 发光角度: 反光杯35度
5. 控制模式: DMX512, 主从模式、自走模式
6. 调光: 线性调光 0-100%
7. 频闪: 0-25次/秒
8. 通道: 8CH
9. 产品尺寸: 370*370*180mm
10. 净重: 12.5KG

Product features

1. Voltage: AC110V/220V 50HZ/60HZ
2. Power consumption: 400W
3. Light source: 4 X COB100W
4. Beam angle: 35degree
5. Operation Mode: DMX, Master/slave, Auto
6. Dimmer: 0-100%
7. Strobe: 0-25HZ
8. DMX: 8CH
9. Product size: 37*37*18cm
10. N.W: 12.5KG



HT-LB-2100IP
2x100W 防水两眼观众灯
2x100W Waterproof LED 2-eye blinder

中文参数

1. 输入电压: AC110V/220V 50HZ/60HZ
2. 总功率: 250W
3. 光源: 2颗COB100W集成暖光灯珠, 色温3200K/5600K可选
4. 发光角度: 反光杯35度
5. 控制模式: DMX512, 主从模式、自走模式
6. 调光: 线性调光 0-100%
7. 频闪: 0-25次/秒
8. 通道: 6/8/12CH
9. 产品尺寸: 400*240*345mm
10. 净重: 8kg
11. 防护等级: IP65

Product features

1. Voltage: AC110V/220V 50HZ/60HZ
2. Power consumption: 250W
3. Light source: 2 X COB100W, 3200K/5600K optional
4. Beam angle: 35degree
5. Operation Mode: DMX, Master/slave, Auto
6. Dimmer: 0-100%
7. Strobe: 0-25HZ
8. DMX: 6/8/12CH
9. Product size: 40*24*34.5cm
10. N.W: 8KG
11. IP Rating: IP65



HT-LB-4100Q

4x100W RGBW四合一四眼观众灯
4x100W RGBW 4IN1 LED 4-eye blinder



HT-LB-2100WA


2x100W 冷白暖白二合一两眼观众灯
2x100W CW&WW 2IN1 LED 2-eye blinder

中文参数

1. 额定电压: AC100-240V, 50 / 60HZ.
 2. 额定功率: 450W
 3. 光源: 四颗100W红绿蓝白四合一COB灯珠
 4. 冷却系统: 对流传热, 风冷。
 5. 调光: 0~100%.
 6. 频闪: 0-20次 / 秒.
 7. 控制模式: DMX512信号 / 主从 / 自走 / 声控.
 8. 通道: 4CHS/8CHS
 9. 尺寸: 370mm*355mm*200mm
 10. 静重: 7.85KG
- 单白或者冷白暖白二合一COB灯珠可选

Product features

1. Voltage: AC100-240V, 50 / 60Hz
 2. Power consumption: 450W
 3. Light source: 4* 100W RGBW 4in1 COB leds
 4. Cooling system: convective heat transfer, air cooling.
 5. Dimming: 0 ~ 100%
 6. Strobe: 0-20 times / second
 7. Control mode: DMX512 signal / master-slave / Auto / Sound control.
 8. Channel: 4CHS/8CHS
 9. Product size: 370mm*355mm*200mm
 10. N.W: 7.85KG
- Single white or CW & WW 2in1 COB LEDs are optional

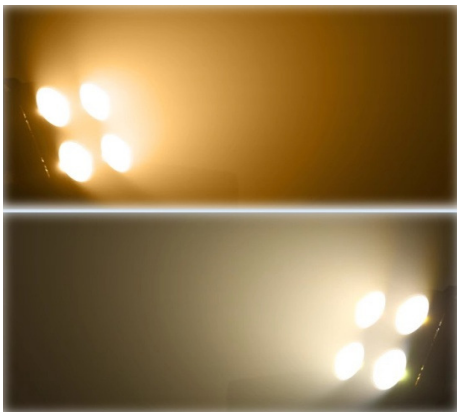

中文参数


1. 额定电压: AC100-240V, 50 / 60HZ.
 2. 额定功率: 200W
 3. 光源: 两颗100W冷白暖白二合一COB灯珠
 4. 冷却系统: 对流传热, 风冷。
 5. 调光: 0~100%.
 6. 频闪: 0-20次 / 秒.
 7. 控制模式: DMX512信号 / 主从 / 自走 / 声控. 两颗灯珠可以单独控制。
 8. 通道: 4CHS/8CHS
- 红绿蓝白四合一COB灯珠可选

Product features

1. Voltage: AC100-240V, 50 / 60Hz
 2. Power consumption: 200W
 3. Light source: 2* 100W cold white + warm white 2in1 COB leds
 4. Cooling system: convective heat transfer, air cooling.
 5. Dimming: 0 ~ 100%
 6. Strobe: 0-20 times / second
 7. Control mode: DMX512 signal / master-slave / Auto / Sound control. Two lamps can be controlled separately.
 8. Channel: 4chs / 8chs
- RGBW 4IN1 COB LEDs are optional



HT-LE-42SET
LED乌龟灯套装
LED turtle light set

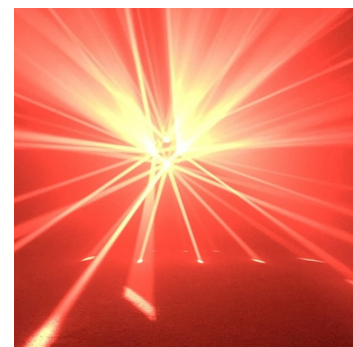

HT-LE-60Q
LED八眼效果灯
LED 8-eye effect light

中文参数

HT-LE-42 参数:

- 1.电压: DC12V. 需使用特制控台
- 2.光源: 42颗高亮度5050 RGB三合一LEDs, 14组灯珠单独控制
- 3.消耗功率: 10W
- 4.控制模式: Madrix
- 5.3-Pin电源&信号 进出
- 6.产品尺寸: 195x95x100mm
- 7.净重: 0.6kgs

特制控台参数:

1. 电压: AC100-240V/50-60HZ
2. 最大消耗功率: 500W (内置12V/500W 开关电源)
3. 4路输出, 每路可控制12台灯, 所以每个控台可以控制48台灯
4. 1.77寸液晶显示屏, Powercon电源进, ArtNet进出
- 5.产品尺寸: 300x160x75mm
- 6.净重: 2.0kgs

Product features

HT-LE-42 specifications:

- 1.Voltage: DC12V. Working with special controller.
- 2.Light source: 42pcs high brightness 5050 RGB 3IN1 LEDs, 14sections control
- 3.Power consumption: 10W
- 4.Operation mode: Madrix
- 5.3-Pin Power & XLR input/output
- 6.Product Size: 195x95x100mm
- 7.Net Weight: 0.6kgs

Controller specifications:


1. Voltage: AC100-240V/50-60HZ
2. Max power consumption: 500W (with inner 12V/500W power supply)
3. 4 output control, each output can control 12pcs lights, so each controller can control 48pcs lights
4. LCD display 1.77inch, Powercon input, ArtNet in/out
5. Product Size: 300x160x75mm
6. Net Weight: 2.0kgs

中文参数


- 1) 光源: 1颗欧司朗60W红绿蓝白四合一灯珠
- 2) 控制模式: DMX,主副机,自走和音控
- 3) DMX通道: 1/4/7通道
- 4) 4按键LED显示屏, 实现友好操作界面
- 5) 调光, 频闪, 旋转月花效果
- 6) IEC电源座进出
- 7) 三芯信号卡龙座进出
- 8) 电压: AC100-240V,50/60HZ
- 9) 消耗功率: 83W
- 10) 灯具尺寸: 292x315x210mm
- 11) 净重: 3.5kgs

Product features

- 1.)Light source: 1 x 60W Osram Ostar™ quad-colour LED (RGBW)
- 2.)Operation mode: DMX512, Master/ slave, Auto, Sound activation
- 3.)DMX512 channels: 1CH/4CHS/7CHS
- 4.)4 push button menu with LED display
- 5.)Dimmer, Strobe, Moonflower rotation effect
- 6.)IEC power input/output
- 7.)3-Pin XLR input/output
- 8.)Voltage: AC100-240V/50-60HZ
- 9.)Power consumption: 83W
- 10.)Product Size: 292x315x210mm
- 11.)Net Weight: 3.5kgs

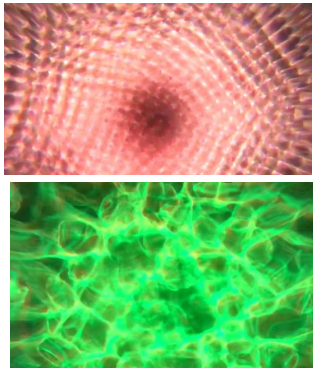

HT-LE-615P
LED六眼效果灯
LED 6-eye effect light

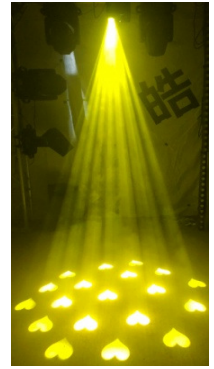

HT-LE-100GBF
100W LED图案月花灯
100W LED gobo flower effect light

中文参数

- 1) 光源: 6颗15W红绿蓝白四合一灯珠
- 2) 控制模式: DMX,主副机,自走和音控
- 3) DMX通道: 10/34通道
- 4) 4按键LED显示屏, 实现友好操作界面
- 5) 调光, 频闪, 峰眼效果, 双玻璃图案融合效果
- 6) IEC电源座进出
- 7) 三芯信号卡龙座进出
- 8) 电压: AC100-240V,50/60HZ
- 9) 消耗功率: 90W
- 10) 灯具尺寸: 246 x 246 x 185mm
- 11) 净重: 3.4kgs

Product features

- 1.)Light source: 6 x 15W quad-colour LEDs (RGBW)
- 2.)Operation mode: DMX512, Master/ slave, Auto, Sound activation
- 3.)DMX512 channels: 10CH/34CHS
- 4.)4 push button menu with LED display
- 5.)Dimmer, Strobe, bee eye effect, 2kinds of glass goboes' melting
- 6.)IEC power input/output
- 7.)3-Pin XLR input/output
- 8.)Voltage: AC100-240V/50-60HZ
- 9.)Power consumption: 90W
- 10.)Product Size: 246 x 246 x 185mm
- 11.)Net Weight: 3.4kgs

中文参数


- 1) 光源: 1颗100W高亮度单白光灯珠,色温8000K
- 2) 控制模式: DMX,主副机,自走和音控
- 3) DMX通道: 2/5/7通道
- 4) 4按键LED显示屏, 实现友好操作界面
- 5) 调光, 频闪
- 6) 1个颜色盘含13种颜色加白光 + 1个图案盘含11种图案加白光
- 7) 月花盘
- 8) 手动调焦
- 9) IEC电源座进出
- 10) 三芯信号卡龙座进出
- 11) 电压: AC100-240V,50/60HZ
- 12) 消耗功率: 130W
- 13) 灯具尺寸: 233.8 x 227.8 x 182.2 mm
- 14) 净重: 4.1kgs

Product features

- 1.)Light source: 1 x 100W white LEDs, 8000k
- 2.)Beam angle: 24degree
- 3.)Operation mode: DMX512, Master/ slave, Auto, Sound activation
- 4.)DMX512 channels: 2CH/5CH/7CH
- 5.)4 push button menu with LED display
- 6.)Dimmer, Strobe,
- 7.)1color wheel with 13colors plus open + 1gobo wheel with 11gobs plus open
- 8.)Mirror wheel
- 9.)Manual focus
- 10.)IEC power input/output
- 11.)3-Pin XLR input/output
- 12.)Voltage: AC100-240V/50-60HZ
- 13.)Power consumption: 130W
- 14.)Product Size: 233.8 x 227.8 x 182.2 mm
- 15.)Net Weight: 4.1kgs



HT-LE-45GBF
45W LED图案月花灯
45W LED gobo flower effect light



HT-LE-1002GBF
100W LED双头图案月花灯
100W LED dual gobo flower effect light

中文参数

- 1) 光源：1颗45W高亮度单白光灯珠,色温8000K
- 2) 控制模式：DMX,主副机,自走和音控
- 3) DMX通道：2/4/6通道
- 4) 4按键LED显示屏，实现友好操作界面
- 5) 调光，频闪
- 6) 15个固定图案/颜色组合盘
- 7) 月花盘
- 8) 手动调焦
- 9) IEC电源座进出
- 10) 三芯信号卡龙座进出
- 11) 电压：AC100-240V,50/60HZ
- 12) 消耗功率：55W
- 13) 灯具尺寸：182 x 234 x 228mm
- 14) 净重：3.1kgs

Product features



- 1.)Light source: 1 x 45W white LEDs, 8000k
- 2.)Beam angle: 24degree
- 3.)Operation mode: DMX512, Master/ slave, Auto, Sound activation
- 4.)DMX512 channels: 2CH/4CH/6CH
- 5.)4 push button menu with LED display
- 6.)Dimmer, Strobe,
- 7.)15 static gobos/colors plus open
- 8.)Mirror wheel
- 9.)Manual focus
- 10.)IEC power input/output
- 11.)3-Pin XLR input/output
- 12.)Voltage: AC100-240V/50-60HZ
- 13.)Power consumption: 55W
- 14.)Product Size: 182 x 234 x 228mm
- 15.)Net Weight: 3.1kgs

中文参数

- 1) 光源：2颗100W高亮度单白光灯珠,色温8000K
- 2) 控制模式：DMX,主副机,自走和音控
- 3) DMX通道：2/7/11通道
- 4) 4按键LED显示屏，实现友好操作界面
- 5) 调光，频闪
- 6) 2个颜色盘各含11种颜色加白光 + 2个图案盘各含11种图案加白光
- 7) 滚筒
- 8) 手动调焦
- 9) IEC电源座进出
- 10) 三芯信号卡龙座进出
- 11) 电压：AC100-240V,50/60HZ
- 12) 消耗功率：240W
- 13) 灯具尺寸：485 x 130 x 155 mm
- 14) 净重：6.1kgs

Product features

- 1.)Light source: 2 x 100W white LEDs, 8000k
- 2.)Operation mode: DMX512, Master/ slave, Auto, Sound activation
- 3.)DMX512 channels: 2CH/7CH/11CH
- 4.)4 push button menu with LED display
- 5.)Dimmer, Strobe,
- 6.)2color wheel with 11colors plus open + 2gobo wheel with 11gobs plus open
- 7.)Mirror barrel
- 8.)Manual focus
- 9.)IEC power input/output
- 10.)3-Pin XLR input/output
- 11.)Voltage: AC100-240V/50-60HZ
- 12.)Power consumption: 240W
- 13.)Product Size: 485 x 130 x 155 mm
- 14.)Net Weight: 6.1kgs

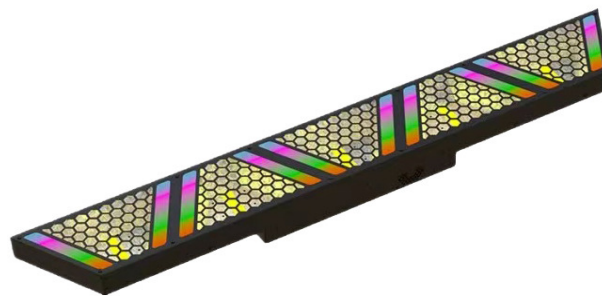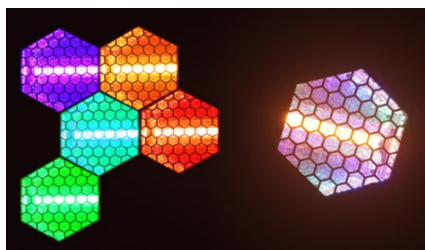

HT-LE-100

六边形多变拼接复古灯

Hexagonal variable splicing retro light

HT-LE-560

5颗多变拼接复古灯


5 head variable splicing retro light

中文参数

- 1.电压: AC100~220V, 50/60HZ
- 2.功率: 72*0.3W(20W)+100W
- 3.产品灯珠: 72颗5050三色LED灯珠
- 4.控制方式: DMX512、自走、主从、声控、带RDM功能
- 5.调光:32位0~100%线性调光
- 6.DMX通道: CH04、CH10、CH73
- 7.特点: 染色+爆闪+辅光
- 8.工作温度: -30度~50度
- 9.频闪频率: 1~30HZ
- 10.产品外观: 金属、黑色

Product features

1. Voltage: AC100~220V, 50/60HZ
2. Power: 72 * 0.3W (20W)+100W
3. LEDs: 72 pcs 5050 RGB 3IN1 LEDs
4. Control mode: DMX512, Auto, Master-slave, Sound control, with RDM function
5. Dimming: 32bit 0-100% linear dimming
6. DMX Channels: CH04, CH10, CH73
7. Features: Wash+Flash+Auxiliary Light
8. Working temperature: -30 ° C~50 ° C
9. Strobe frequency: 1-30Hz
10. Product appearance: metal, black


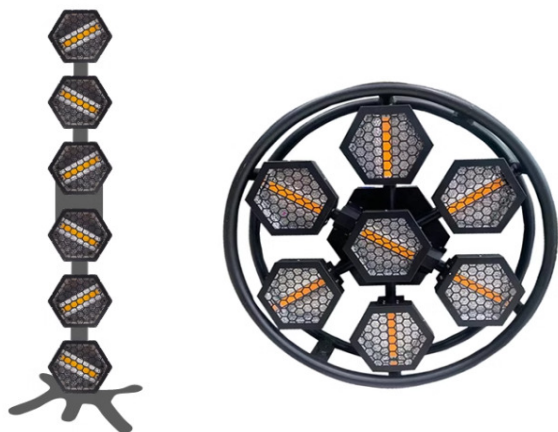


中文参数

- 1.电压: AC100~220V, 50/60HZ
- 2.消耗功率: 250W
- 3.LED 光源: 5颗60W COB灯珠+120颗5050红绿蓝三合一0.3W灯珠
- 4.控制方式: DMX512、自走、主从、声控、带RDM功能
- 5.通道: CH04、CH13、CH35、CH44
- 6.调光: 32bit 0~100%线性调光
- 7.特点: 染色+爆闪+辅光
- 8.工作温度: -30度~50度
- 9.频闪频率: 1~30HZ
- 10.产品外观: 金属、黑色

Product features

1. Voltage: AC100~220V, 50/60HZ
2. Power: 250W
3. LEDs: 5pcs 60W COB + 120pcs 5050 RGB 3IN1 LEDs
4. Control mode: DMX512, Auto, Master-slave, Sound control, with RDM function
5. DMX Channels: CH04, CH13, CH35, CH44
6. Dimming: 32bit 0-100% linear dimming
7. Features: Wash+Flash+Auxiliary Light
8. Working temperature: -30 ° C~50 ° C
9. Strobe frequency: 1-30Hz
10. Product appearance: metal, black

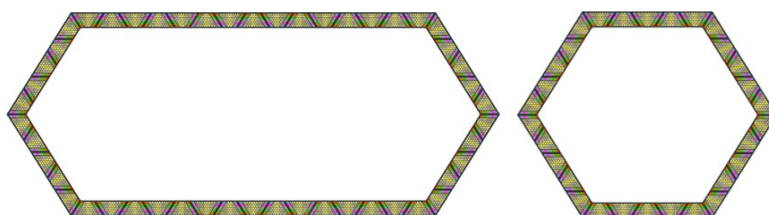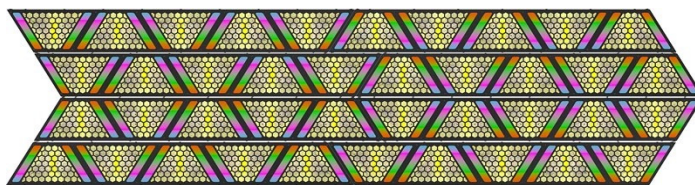



HT-FS-260
260W追光灯
10R 260W Follow Spot



HT-FS-350
350W追光灯
17R 350W Follow Spot

中文参数

- 1.电压:110V-240V, 50Hz-60Hz
- 2.光源: 投影泡260W
- 3.总功率:360W
- 4.颜色:4种彩色加白光, 红、黄、兰、绿
- 5.功能: 电动线性调焦、开光闭光频闪
- 6.光圈大小可调、点控换色功能
- 7.光束角度:8-15度
- 8.有效射程20-30米
- 9.净重: 9.5KG 支架重: 3KG
- 10.纸箱包装尺寸:605*290*24mm
- 11.航空箱包装尺寸: 725*480*295mm
- 12.毛重: 24KG

Product features

- 1.Voltage: AC100-240V, 50-60HZ
- 2.Light Source: OSRAM/Philip 260W
- 3.Power Consumption: 350W
4. Color: White, Red, Green, Blue, Yellow
5. Function: electronic focus, strobe
6. Iris, color change
- 7.Beam angle: 8-15degree
- 8.Distance: 20-30meters
- 9.N.W: 9.5KG Stand weight: 3KG
- 10.Cartoon Packing Size: 605*290*240mm
- 11.Flight Case Packing Size: 725*480*295mm
- 12.G.W: 24KG

中文参数

- 1.电压:AC220V~240V 50Hz/60Hz
- 2.耗电功率:450W
- 3.灯泡规格:欧司朗OSRAM SIRIUS HRI 350W
- 4.颜色:一个彩色转轮4种颜色+白光,色温片3种颜色
- 5.控制信号:DMX512
- 6.控制模式:单机模式
- 7.光学系统:高精密度石英透镜非球面组合(4道)
- 8.散热系统:高强度风冷(双风机)
- 9.光圈效果:光圈大小可调
- 10.频闪:1-7次/秒频闪
- 11.色温校正:正常5600k,调高6000K,调低3200K
- 12.有效射程:40-70m
- 13.光束角度:23度
- 14.安全措施:符合各种安全标准,IP20保护等级,电源线符合CE20/22三级标准,高温自动切断保护装置
- 15.外壳:铝合金包边
- 16.净重:19kg 包装尺寸:73*35*33cm

Product features

1. Voltage: AC220V~240V 50Hz/60Hz
2. Power consumption: 450W
3. Bulb specification: OSRAM SIRIUS HRI 350W
4. Color: a color wheel with 4 colors +open, 3 color temperature filters
5. Control signal: DMX 512 signal
6. Control mode: single machine mode
7. Optical system: high-precision quartz lens aspheric combination
8. Heat dissipation system: High intensity air cooling (dual fan)
9. Iris: adjustable aperture size
10. Strobe: 1-7 times/second strobe
11. Color temperature correction: normal 5600k, increase by 6000K, decrease by 3200K
12. Light distance: 40-70m
13. Beam angle: 23 degrees
14. Safety measures: comply with various safety standards, IP20 protection level, power cord compliance
Compliant with CE20/22 Level III standard, with high-temperature automatic cut-off protection device
15. Shell: aluminum alloy edging
16. Net weight: 19kg Packaging size: 73 * 35 * 33cm



HT-FS-L200/L600
200W/600W LED追光灯
200W / 600W LED Follow Spot



HT-FS-440IP
440W防水追光灯
440W Waterproof Follow Spot

中文参数

1. 电压:110V-240V, 50Hz-60Hz
2. 光源: LED 200W / LED 600W
3. 总功率:320W / 880W
4. 颜色:4种彩色加白光, 红、黄、兰、绿。
5. 功能: 手动调焦+电动线性调焦、开光闭光频闪、光圈大小、点控换色功能
6. 光束角度:8-15度
7. 有效射程20-30米 / 60-80米
8. 净重: 灯重33KG 支架5KG
9. 纸箱包装尺寸:970x390x430mm
10. 航空箱包装尺寸: 1140x480x570mm
11. 毛重: 58KG

Product features

1. Voltage:110V-240V, 50Hz-60Hz
2. Light source: LED 200W / LED 600W
3. Power consumption:320W / 880W
4. Color: 4Colors +open, Red, Yellow, Blue and Green.
5. Function: Focus, Strobe, Zoom, Color change
6. Beam angle: 8-15degree
7. Distance: 20-30meter / 60-80meter
8. N.W: Lighting 33KG Stand 5KG
9. Carton packing size: 970x390x430mm
10. Flight case packing size:1140x480x570mm
11. G.W: 58KG

中文参数

1. 电压:110V-240V, 50Hz-60Hz
2. 光源: 投影泡440W
3. 总功率:650W
4. 颜色:两个颜色盘, 5种彩色加白光, 红、黄、兰、绿、玫红、升温片降温片3200K-4500K-6500K
5. 通道: 5个DMX512通道
6. 功能: 手动调焦+电动线性调焦、开光闭光频闪、光圈大小、雾化、点控换色功能
7. 光束角度:5-18度
8. 有效射程80-100米
9. 净重: 灯重42KG 支架5KG
10. 木箱包装尺寸:1260x470x430mm
11. 航空箱包装尺寸: 1320x550x570mm
12. 毛重: 76KG
13. 防护等级: IP65

Product features

1. Voltage:110V-240V, 50Hz-60Hz
2. Lamp: PHILIPS/OSRAM/YODN 440W
3. Power consumption:650W
4. Color: 2Color wheel, 5Colors +open, Red, Yellow, Blue, Green, Magenta, color temperature 3200K-4500K-6500K.
5. DMX: 5CHS
6. Function: Focus, Strobe, Zoom, Frost, Color change
7. Beam angle: 5-18degree
8. Distance: 80-100meter
9. N.W: Lighting 42KG Stand 5KG
10. Wood packing size: 1260x470x430mm
11. Flight case packing size: 1320x550x570mm
12. G.W: 76KG
13. IP Rating: IP65




HT-Laser-6W
6头全彩激光灯
6 Head RGB full color laser

中文参数

- 1、输入电压:AC100-240V, 50/60Hz
 - 2、总功率: 180W
 - 3、激光器规格: 1W (R250mW+G150mW+B600mW) * 6
 - 4、控制模式: 声控/自动/DMX/主从控制
 - 5、自走效果: 16种自走动态效果, 16种声控动态效果
 - 6、控制通道: 14CH/35CH
 - 7、Y轴扫描: 0-230度 Z轴扫描: 0-140度
 - 8、冷却系统: 风机强制冷却系统
 - 9、工作环境: 室内 (0-35°)
 - 10、两支装净/毛重: 27kg/31kg
 - 11、包装尺寸: 101*46*33 cm
- 红绿蓝全彩激光头可选: 300mw * 6

Product features

1. Voltage: AC100-240V, 50 / 60Hz
 2. Power consumption: 180W
 3. Laser: 1W (R250mW+G150mW+B600mW) * 6
 4. Control mode: Sound / Auto / DMX / master-slave control
 5. Auto: 16 auto/sound built-in programs
 6. DMX channel: 14CH/35CH
 7. Y scan angle: 0-230degree Z scan angle: 0-140degree
 8. Cooling system: forced cooling system of fan
 9. Working environment: indoor (0-35°)
 10. N.W/G.W (2PCS): 27kg/31kg
 11. Packing size: 101*46*33 cm
- Red, green and blue full color laser head available: 300MW * 6

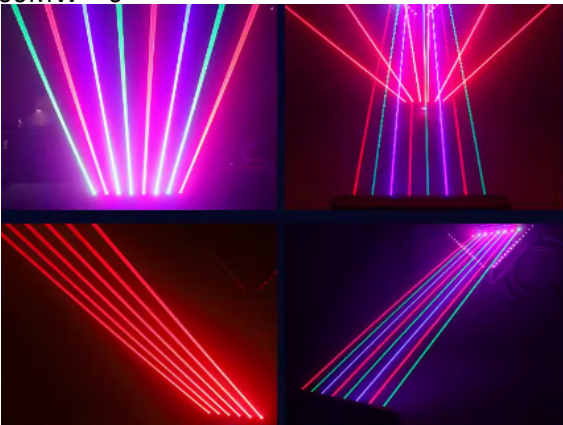


HT-Laser-12W
6眼全彩激光灯
6 Eye RGB full color laser


中文参数

1. 工作电压: AC100~240V 50/60Hz
2. 功耗: 300W
3. 激光配置: W2000mW x6
4. 扫描系统: 20kpps x 6pcs
5. 控制模式: DMX512、自走、声控、主从、ILDA激光软件 (6头同步)
6. 控制接口: 三芯DMX512接口、五芯DMX512接口 (选配)、ILDA DB25接口
7. DMX通道: 27/121 (默认) / 157CH (单头可控)
8. 内置图案: 160个 (8组*20pcs)
9. 内置效果: 6头动画, 统一效果, 单独效果, 跑灯效果
10. 冷却系统: 低噪音风冷
11. 纸箱单只装尺寸: 107*25*22.5cm
12. 单只装净/毛重: 10/12Kg
13. 纸箱两只装尺寸: 112*54*28cm
14. 两只装净/毛重: 20/26Kg

Product features

- 1.Voltage: AC100~240V 50/60Hz
- 2.Power consumption: 300W
- 3.Light source: W2000mW x6
- 4.Scan system: 20kpps x 6pcs
- 5.Operation Mode: DMX512、Auto、Sound、Master/Slave、ILDA laser software
- 6.XLR / ILDA DB25
- 7.DMX Channel: 27/121/157CH
- 8.Built-in patterns: 160patterns (8groups*20patterns)
- 9.Built-in programs: 6-head animation, unified effect, separate effect, chase effect
- 10.Cooling system: low noise air cooling
- 11.Packing size: 107*25*22.5cm
- 12.Gross weight: 12Kg
13. Out carton size for 2pcs: 112*54*28cm
14. G.W for 2pcs: 20/26Kg

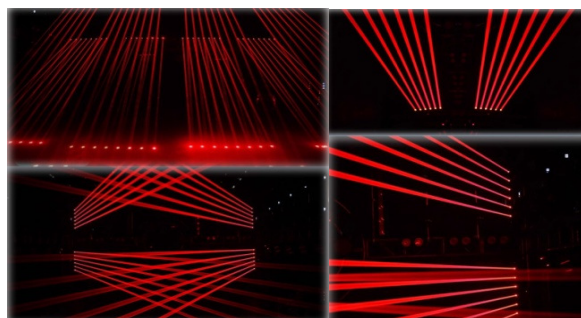

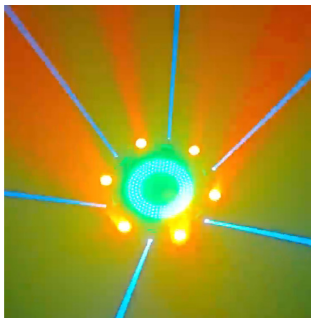

HT-Laser-6LBS

6头全彩激光灯+6头光束+频闪

6 Head RGB full color laser + 6 LED beam+Strobe



HT-Laser-10W

10W全彩动画激光灯

10W RGB full color laser

中文参数

- 1.电压：AC100-240V，50/60Hz
- 2.功耗：100W
- 3.激光光源：500mW RGB 3IN1全彩*6
LED光束光源：WW 5W*6
LED频闪光灯光源：单颗0.2W全彩x270颗
- 4.控制方式：DMX512、自动、声控、主从
- 5.控制接口：XLR DMX-512接口（输入/输出）
- 6.DMX信道：16CH/45CH/75CH信道控制模式
- 7.效果：自动动态效果，内置丰富色彩宏
- 8.激光效应：光束效应
- 9.LED效果：频闪灯
- 10.水平轴行程：无限扫描范围
- 11.Y轴行程：0-140度扫描范围
- 12.扫描系统：精密步进电机
- 13.电控技术：①RDM数据双向传输②DMX512升级
- 14.冷却系统：低噪音风冷

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power consumption: 100W
3. Laser light source: 500mW RGB 3IN1 full-color * 6
LED beam light source: WW 5W * 6
LED strobe light source: single 0.2W full-color x 270pcs
4. Control mode: DMX512, Auto, voice control, master/slave
5. Control interface: XLR DMX-512 interface (IN/OUT)
6. DMX channel: 16CH/45CH/75CH channel control mode
7. Effect: Auto dynamic effects, built-in rich color macro
8. Laser effect: beam effect
9. LED effect: strobe light
10. Horizontal axis travel: infinite scanning range
11. Single axis travel: 0-140 degree scanning range
12. Scanning system: precision stepper motor
13. Electronic control technology: ① RDM data bidirectional transmission ② DMX512 upgrade
14. Cooling system: low-noise air cooling

中文参数

- 1、输入电压:AC100-240V，50/60Hz
- 2、总功率：180W
- 3、激光器规格：10W（R3W+G3W+B4W）
- 4、控制模式：声控/自动/DMX/主从控制/软件控制（ILDA标准电脑激光表演软件控制，信号采用电子开关转换）
- 5、40K高速振镜，大角度扫描
- 6、扫描角度：+30°/-30°
- 7、冷却系统：风机强制冷却系统，散热器
- 8、净重：10.25kg
- 9、产品尺寸：31*28*19 cm

Product features

1. Voltage: AC100-240V, 50 / 60Hz
2. Power consumption: 180W
3. Laser: 10W（R3W+G3W+B4W）
4. Control mode: Sound / Auto / DMX / master-slave control/ Software control (ILDA standard computer laser performance software control, signal conversion by electronic switch)
5. 40K high speed galvanometer, large angle scanning
6. Scanning angle: +30°/-30°
7. Cooling system: forced cooling system of fan, heatsink
8. N.W: 10.25kg
9. Product size: 31*28*19 cm



HT-Laser-20W IP
20W防水全彩动画激光灯

20W Waterproof RGB full color laser



HT-Laser-60W IP
60W防水全彩动画激光灯

60W Waterproof RGB full color laser

中文参数

- 1.光源功率:20W, 平均使用寿命10000小时, 全固体半导体激光器
 2. 红光波长功率:638nm:6W
绿光波长功率:525nm:6W
蓝光波长功率:450nm:8W
 3. 振镜:DT50
 - 4.最大角度:60°
 - 5.电压:AC100-240V50/60Hz
 - 6.消耗功率: 700W
 - 7.扫描速度: 40KPPS
 - 8.控制方式:ILDA、Auto、DMX, 主副机 or FB4
 - 9.尺寸:460x460x250mm
 - 10.净重:42KG
 - 11.防护等级:IP65
 - 12.适合场所: 城市景观、建筑地标、演出活动、广告推广等
- 30W,40W,50W,60W,80W,100W可选

Product features

1. Light source: 20W, average lifetime 10000hours, all solid state semiconductor laser
 2. Red laser power: 638nm: 6W
Green laser power: 525nm: 6W
Blue laser power: 450nm: 8W
 3. Scan mirror: DT50
 4. Maximum angle: 60 °
 5. Voltage: AC100-240V50/60Hz
 6. Power consumption: 700W
 7. Scanning speed: 40KPPS
 8. Operation Modes: ILDA, Auto, DMX, Master/Slave or FB4
 9. Size: 460x460x250mm
 10. Net weight: 42KG
 11. IP rating: IP65
 12. Suitable places: urban landscape, architectural landmarks, performance activities, advertising promotion, etc
- 30W, 40W, 50W, 60W, 80W, 100W optional

中文参数

- 1.激光配置: R635-16W/G525-18W/B445-26W
- 2.工作电压: AC100~240V 50/60Hz
- 3.功耗: ≤1200W
- 4.扫描系统: 40K地标扫描振镜, 光学角度MAX±30°; 输入信号±5V; 线性失真<2%
- 5.激光调制:模拟调制
- 6.光束直径及发散角:9*6.5mm;1.2mrad
- 7.控制模式: 自走、DMX512、ILDA
- 8.控制接口: 防水三芯DMX512接口,防水ILDA DB25接口
- 9.DMX通道: 27CH
- 10.防护等级: IP65(户外全天候使用)
- 11.适合场所: 城市景观, 建筑地标, 演出活动, 广告推广等

Product features

1. Laser light source: R635-16W/G525-18W/B445-26W
2. Working voltage: AC100~240V 50/60Hz
3. Power consumption: ≤ 1200W
4. Scanning system: 40K landmark scanning galvanometer, optical angle MAX ± 30 °; Input signal ± 5V; Linear distortion<2%
5. Laser modulation: analog modulation
6. Beam diameter and divergence angle: 9 * 6.5mm; 1.2mrad
7. Control mode: Auto、DMX512、ILDA
8. Control interface: Waterproof three core DMX512 interface, Waterproof ILDA DB25 interface
9. DMX channel: 27CH
10. Protection level: IP65 (outdoor all-weather use)
11. Suitable locations: urban landscapes, architectural landmarks, performance events, advertising promotions, etc



LED-Strip 1
LED像素条
LED Pixel Strip



LED-Strip 2
LED天幕灯
LED Backdrop

中文参数

- 1.电压: 24V DC
 - 2.消耗功率: 13W
 - 3.光源: 40颗高亮度SMD5050 RGB三合一LEDs
 - 4.可视角度: 120°
 - 5.亮度: 20LUX每米
 - 6.像素点: 1 * 40
 - 7.控制方式: DMX, Art Net, Matrix
 - 8.DMX通道: 8
 - 9.Art net通道: 120
 - 10.外壳: 金属+塑料
 - 11.尺寸: 1000 * 35 * 100mm
 - 12.重量: 1.6kg
- 每个控制台控制16台灯

Product features

- 1.Voltage: 24V DC
 - 2.Power: 13w
 - 3.Light source: 40 high brightness SMD5050 RGB 3in1 LEDs
 - 4.Visual angle: 120°
 - 5.Brightness: 20LUX per meter
 - 6.Pixel matrix: 1 * 40
 - 7.Control program: DMX, Art Net, Matrix
 - 8.DMX channel: 8
 - 9.Art net channel: 120
 - 10.Shell: metal+plastic
 - 11.Size: 1000 * 35 * 100mm
 - 12.Weight: 1.6kg
- Each controller can control 16pcs light

中文参数

- 1.输入电压: AC100-240V,50/60Hz
- 2.最大消耗功率:100W
- 3.光源: 36颗3535 3W三色灯珠
- 4.像素点: 1 * 36
- 5.控制方式: 标准DMX512信号协议, 内置多种效果程序, 声控, 自走, 声控效果极佳, 内置RDM512协议等!
- 6.DMX通道: 9CH/108CH
- 7.外壳: 金属+塑料
- 8.调光技术: FLICKER FREE 10KHz的调光刷新 PWM频闪, 拍摄, 摄像无闪烁。
- 9.尺寸: 1000 * 35 * 100mm
- 10.重量: 1.9kg
- 11.适用场景: 音乐节、酒吧、清吧, KTV包房等场所.....


Product features

1. Input voltage: AC100-240V, 50/60Hz
2. Maximum power consumption: 100W
3. Light source: 36*3535 3W tricolor LEDs
4. Pixels: 1 * 36
5. Control method: Standard DMX512 signal protocol, built-in multiple effect programs, sound control, auto, excellent sound control effect, built-in RDM512 protocol, etc!
6. DMA channel: 9CH/108CH
7. Shell: Metal+Plastic
8. Dimming technology: FLICKER FREE 10KHz dimming refresh PWM strobe, no flickering during shooting and shooting.
9. Size: 1000 * 35 * 100mm
10. Weight: 1.9kg
11. Applicable for: music festivals, bars, KTV private rooms etc.



HT-LB-1030IO

10x30W LED十头矩阵灯带内外全彩氛围灯
10x30W LED 10 eye blinder with backgroud

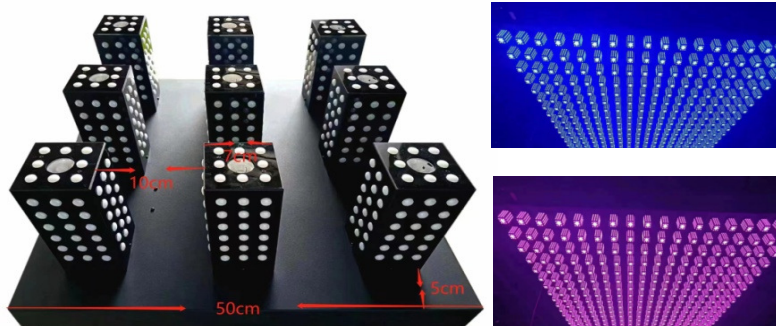

HT-LE-Corn
立体矩阵像素玉米灯
3D matrix pixel corn

中文参数

- 1.电压/频率: AC100-240V, 50-60Hz
- 2.额定功率: 900W
- 3.光源:
10颗高亮度大功率80W 冷白或者暖白 LED灯珠, 平均寿命20000小时
辅光: 10圈*18*0.3W RGB三合一 5050LED灯珠
- 4.光束角度: 4°
- 5.控制通道: 4/15/24通道
- 6.运行模式: DMX512, 主从, 自走, 声控, 带RDM功能
- 7.调光: 32bit 0-100%线性调光
- 8.频闪: 1-30次/秒
- 9.其他功能: 光束+爆闪+辅光+染色, LCD显示屏, DMX512信号输入输出, POWERCON电源进出, 光束饱满锐利, 卓越的混色功能
- 10.适用范围: 酒吧、迪厅、酒店、舞厅、舞台、婚庆等
- 11.产品尺寸: 57.3*23*30.2cm

Product features

1. Voltage/frequency: AC100-240V, 50-60Hz
2. Rated power: 900W
3. Light source:
10pcs 80W cool white or warm white LEDs, with an average lifespan of 20000 hours
Auxiliary light: 10 circles * 18 * 0.3W RGB 3in1 5050 LEDs
4. Beam angle: 4 °
5. Control channel: 4/15/24 channels
6. Operation mode: DMX512, Master slave, Auto, Sound control, with RDM function
7. Dimming: 32-bit 0-100% linear dimming
8. Strobe: 1-30 times/second
9. Other functions: beam+flashing+auxiliary light+dyeing, LCD display screen, DMX512 signal input and output, POWERCON power input and output, full and sharp beam, excellent color mixing function
10. Scope of application: bars, nightclubs, hotels, dance halls, stages, weddings, etc
11. Product size: 57.3 * 23 * 30.2cm

中文参数

- 1.电压/频率: AC100-240V, 50-60Hz
- 2.额定功率: 135W
- 3.光源:
720颗高亮度WS2812-2020 RGB三合一灯珠, 平均寿命50000小时
9颗9W大功率灯珠, 配合3度光学透镜
每台灯9个像素, 每个像素单位5个发光面6层像素灯珠共80颗灯珠达到3D效果
- 4.光束角度: 3°
- 5.控制方式: 信号连接RJ45网口端子, 兼容幻彩控制器, 可脱机、ARTNET、DMX512控制
- 6.调光: 0-100%线性调光
- 7.频闪: 1-20次/秒
- 8.适用范围: 酒吧、迪厅、KTV、舞厅、舞台、婚庆等
- 9.外壳材料: 金属+亚克力+PC
10. 尺寸: 500*500*250mm
11. 重量: 7.5KG

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 135W
3. Light source:
720 high brightness WS2812-2020 RGB 3in1 LEDs with an average lifespan of 50000 hours
9pcs 9W high power LEDs, paired with a 3-degree optical lens
Each light has 9 pixels corn, each corn with 5 luminous surfaces and 6 layers of pixel leds. There are total 80 leds in each corn, achieving a 3D effect
4. Beam angle: 3 °
5. Control method: Signal connection to RJ45 network port terminal, compatible with phantom controller, can be offline, ARTNET, DMX512 controlled
6. Dimming: 0-100% linear dimming
7. Strobe: 1-20 times/second
8. Scope of application: bars, discos, KTVs, dance halls, stages, weddings, etc
9. Shell material: metal+acrylic+PC
10. Size: 500 * 500 * 250mm
11. Weight: 7.5KG



HT-Gobo
防水LED图案灯
Outdoor LED gobo projector

中文参数

- 1.额定电压: AC110V/240V 50-60HZ
- 2.光源: 1PS LED 100W-400W超高亮度欧司朗芯片, 平均寿命50000小时, 色温6500K-7000K
- 3.出光角度: 28°36°48° (可选)
- 4.连接方式: 手拉手连接
- 5.调光曲线: 0-100%
- 6.通道模式: 5通道
- 7.显示方式: LED触摸屏液晶显示
- 8.效果图案: 1个图案盘(4个或者6个独立LOGO片)和变速旋转
- 9.调焦功能: 机械调清晰度
- 10.控制方式: 标准DMX512/手动/主从模式控制/自动运行模式
- 11.外壳材质: 压铸模+铝型材
- 12.防护等级: IP65
- 13.产品尺寸: 275*281*317mm
- 14.净重: 8.24kg

Product features

1. Voltage: AC110V/240V 50-60HZ
2. Light source: 1PS LED 100W-400W ultra high brightness Osram chip, with an average lifespan of 50000 hours and a color temperature of 6500K-7000K
3. Beam angle: 28 ° 36 ° 48 ° (optional)
4. Connection method: Hand in hand connection
5. Dimming curve: 0-100%
6. Channel mode: 5 channels
7. Display mode: LED touch screen LCD display
8. Effect pattern: 1 pattern disc (4 or 6 independent logo pieces) and variable speed rotation
9. Focusing function: mechanical clarity adjustment
10. Control mode: DMX512/Manual/Master-slave/Auto
11. Shell material: die-casting mold+aluminum profile
12. Protection level: IP65
13. Product size: 275 * 281 * 317mm
14. Net weight: 8.24kg



HT-Waterwave
防水LED水纹灯
Outdoor LED waterwave

中文参数

- 1.额定电压: AC110V/240V 50-60HZ
- 2.光源: 1PS LED 100W-400W超高亮度欧司朗芯片, 平均寿命50000小时, 色温6500K-7000K
- 3.出光角度: 28°36°48° (可选)
- 4.连接方式: 手拉手连接
- 5.调光曲线: 0-100%
- 6.通道模式: 6通道
- 7.显示方式: LED触摸屏液晶显示
- 8.颜色: 1个颜色盘: 5个颜色+白光
- 9.2个效果盘: 双向流水效果
- 10.调焦功能: 机械调清晰度
- 11.控制方式: 标准DMX512/手动/主从模式控制/自动运行模式
- 12.外壳材质: 压铸模+铝型材
- 13.防护等级: IP65
- 14.产品尺寸: 275*281*317mm
- 15.净重: 8.24kg

Product features

1. Voltage: AC110V/240V 50-60HZ
2. Light source: 1PS LED 100W-400W ultra high brightness Osram chip, with an average lifespan of 50000 hours and a color temperature of 6500K-7000K
3. Beam angle: 28 ° 36 ° 48 ° (optional)
4. Connection method: Hand in hand connection
5. Dimming curve: 0-100%
6. Channel mode: 6 channels
7. Display mode: LED touch screen LCD display
8. Color: 1 color wheel: 5 colors+white
- 9.2 effect discs: bidirectional flowing effect
10. Focusing function: mechanical clarity adjustment
11. Control mode: DMX512/Manual/Master-slave/Auto
12. Shell material: die-casting mold+aluminum profile
13. Protection level: IP65
14. Product size: 275 * 281 * 317mm
15. Net weight: 8.24kg



LB-01
舞台升降球
Stage Lift Ball





HT-LE-Fan 2
LED风扇灯
LED Windmill Fan

中文参数

- 1.电压/频率: AC100-240V, 50-60Hz
- 2.额定功率: 100W
- 3.升降范围: 0-15米
- 4.安装方式: 垂直吊装
- 5.运行模式: DMX512, 主从, 自走
- 6.彩球直径: 13/15/20/25/30/35CM
- 7.适用范围: 酒吧、迪厅、舞台、婚庆等

Product features

1. Voltage: AC100-240V, 50-60Hz
2. Power consumption: 100W
3. Lifting range: 0-15 meters
4. Installation method: Vertical lifting
5. Operating mode: DMX512, Master/Slave, Auto
6. Ball diameter: 13/15/20/25/30/35CM
7. Scope of application: bars, discos, stages, weddings, etc


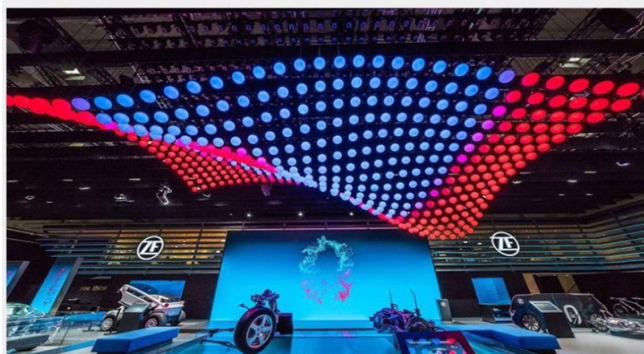
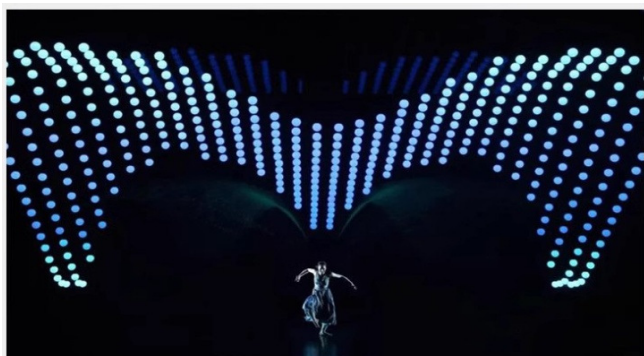


中文参数

- 1.额定电压: AC100-240V, 50/60HZ.
- 2.额定功率: 200W
- 3.光源: 576颗5050贴片灯珠
- 4.调光: 0~100%.
- 5.频闪: 0-20次 / 秒.
- 6.控制模式: DMX512信号 / 主从 / 自走 / 声控.

Product features

1. Voltage: AC100-240V, 50/60Hz
2. Power consumption: 200W
3. Light source: 576* 5050 SMD leds
4. Dimming: 0 ~ 100%
5. Strobe: 0-20 times / second
6. Control mode: DMX512 signal / master-slave / Auto / Sound control.

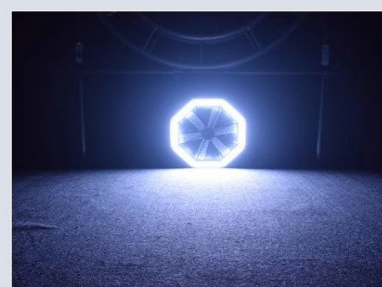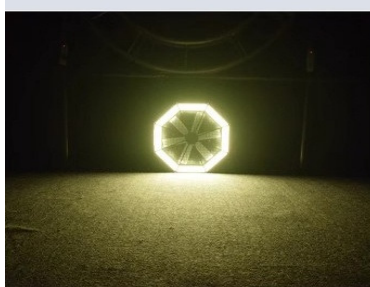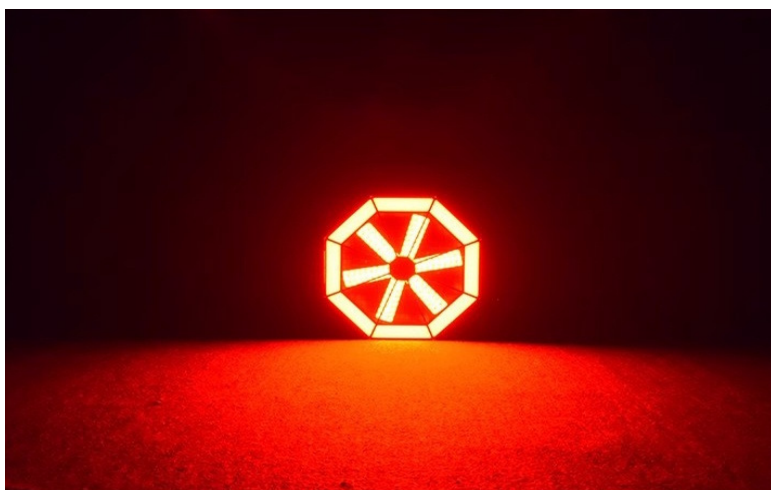



HAZE-1000
1000W雾机
1000W Haze Machine

中文参数

1. 电压: AC110/220V, 50/60HZ
2. 消耗功率: 1000W
3. 预热时间: 6分钟
4. 最大输出油耗: 约60分钟/L
5. 油桶容积:3L
6. 控制模式: DMX-512/遥控
7. DMX通道:2CH
8. 产品尺寸:440*353*270mm
9. 包装尺寸:480*410*320mm
10. 净重: 7.30KG
11. 毛重: 8.35KG

Product features

1. Voltage: AC110/220V, 50/60HZ
2. Power: 1000W
3. Preheating time: 6Min
4. Maximum output fuel consumption: about 60 min/L
5. Oil can volume: 3L
6. Control method: DMX-512 control、remote control
7. DMX channels:2CH
8. Machine Size:440*353*270mm
9. Packing Size:480*410*320mm
10. N.W.: 7.30KG
11. G.W.: 8.35KG



HAZE-1500
1500W雾机
1500W Haze Machine

中文参数

1. 电压: AC110/220V, 50/60HZ
2. 消耗功率: 1000W
3. 预热时间: 1分钟
4. 最大输出油耗: 约60分钟/L
5. 控制模式: DMX-512/遥控
6. DMX通道:2CH
7. 产品尺寸:480*343*280mm
8. 包装尺寸:515*400*335mm
9. 净重: 12KG
10. 毛重: 13KG

Product features

1. Voltage: AC110/220V, 50/60HZ
2. Power: 1500W
3. Preheating time: 1Min
4. Maximum output fuel consumption: about 60 min/L
5. Control method: DMX-512 control、remote control
6. DMX channels:2CH
7. Machine Size:480*343*280mm
8. Packing Size:515*400*335mm
9. N.W.: 12KG
10. G.W.: 13KG



HAZE-600
双头雾机
2 output haze machine



FOG-4000
4000W户外烟机
4000W outdoor fog machine

中文参数

- 1.使用电压：220-240 V, 50/60 Hz
- 2.限流保险参数：Fuse 5 A, 250 V
- 3.总功率：600 W
- 4.工作电流：2.5 A
- 5.电源输入连接方式：IEC 数据接口：3-pin XLR
- 6.预热时间：0 分钟（无须加热）
- 7.油桶容积：3.3 L
- 8.最大输出烟雾量：大约3,000 立方英尺/分钟
- 9.最大输出耗油量：大约25 h/L
- 10.最长持续输出时间（100输出）：无限制
- 11.控制协议：DMX-512
- 12.DMX通道数：1
- 13.净重：32.5 kg 毛重：35.0 kg
- 14.航空箱包装
- 机器尺寸：500 × 380 × 450 mm
- 包装尺寸：555 × 510 × 495 mm

Product features

1. Operating voltage: 220-240 V, 50/60 Hz
2. Current limiting insurance parameters: Fuse 5 A, 250 V
3. Total power: 600 W
4. Working current: 2.5 A
5. Power input connection method: IEC; Data interface: 3-pin XLR
6. Preheating time: 0 minutes (no heating required)
7. Oil drum capacity: 3.3 L
8. Maximum output smoke volume: approximately 3000 cubic feet per minute
9. Maximum output fuel consumption: approximately 25 h/L
10. Maximum continuous output time (100 outputs): unlimited
11. Control Protocol: DMX-512
12. Number of DMX channels: 1
13. Net weight: 32.5 kg Gross weight: 35.0 kg
14. Aviation box packaging
- Machine size: 500 × 380 × 450 mm
- Packing size: 555 × 510 × 495 mm

中文参数

- 1.输入电压：AC220V/50HZ
- 2.功率：4000瓦
- 3.额定电流：18.2A
- 4.烟部预热时间：小于8分钟
- 5.保险：19A
- 6.无油保护：支持
- 7.DMX通道：2
- 8.可持续烟雾喷射时间（100%输出）：6分钟
- 9.显示屏：LCD
- 10.风量调节：0-100%可调
- 11.烟雾量调节：0-100%可调
- 12.油桶容量：6L*2（双管）
- 13.油耗：约70ML/min

Product features


- 1.Input voltage: AC220V / 50 HZ
- 2.Power: 4000W
- 3.Rated current: 18.2A
- 4.Pre-heating time of the smoke part: less than 8 minutes
- 5.Insurance: 19A
- 6.Oil-free protection: YES
- 7.DMX channel:2
- 8.Sustainable smoke injection time (100% output): 6 minutes
- 9.Display screen: LCD
- 10.Air volume adjustment: 0-100% adjustable
- 11.Smoke volume adjustment: 0-100% adjustable
- 12.Oil barrel capacity: 6L * 2 (double barrel)
- 13.Fuel consumption: approximately 70ML / min



HT-FG
汽柱烟机
Fog Gun



HT-Spark
冷焰喷花机
Cold spark machine

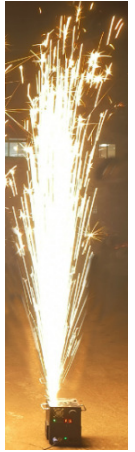

中文参数

- 1.电压:AC110-120V/220-240V,50/60Hz
- 2.功率:3000w
- 3.预热时间:8分钟
- 4.烟雾输出:4000cuft/min
- 5.油桶容积:10L
- 6.控制器: 遥控, DMX512

Product features

1. Voltage: AC110-120V/220-240V, 50/60HZ
2. Power: 3000W
3. Preheating time: 8Min
4. Smoke output: 4000 cuft/min
5. Oil can volume: 10L
6. Control method: DMX-512 control、remote control

中文参数

- 1.喷花高度: 可调1-5米 5档
- 2.功能: DMX512和无线遥控
- 3.功率: 600W/900W可选
- 4.配件: 电源线, 信号线, 遥控器
- 5.DMX控台5个档位可调, 遥控3个档位可调
- 6.喷花口22mm
- 7.钛粉每包200克, 最小档喷花连续时间是11分钟, 最大档喷花连续时间9分钟(不推荐连续喷, 对机器有损害)
- 8.尺寸: 185*185*252mm
- 9.重量: 5.9kg

Product features

1. Spray height: adjustable 1-5 meters with 5 levels
2. Features: DMX512 and wireless remote control
3. Power consumption: 600W/900W optional
4. Accessories: power cord, DMX signal cable, remote control
5. There are 5 adjustable levels on the DMX controller, and 3 adjustable levels for remote control;
6. Spray nozzle diameter: 22mm
7. Titanium powder is 200g per pack, continuous spray for 11 minutes based on smallest level and continuous spray for 9 minutes based on biggest level (continuous spray is not recommended as it may cause damage to the machine)
8. Size: 185 * 185 * 252mm
9. Weight: 5.9kg



珍珠控台 Pearl 2010

中文参数

1. DMX512/1990标准,2048个DMX控制通道。
2. 四个光电隔离独立驱动信号输出端口。可抗2000VRMS电气冲击。
3. 独立电源独立信号。可以控制40通道最多240台电脑灯和240路调光。
4. 320X240大屏幕显示所有操作和变化及输出。
5. 可以存储450个程序, 旋钮有不同的时间可调。XY控制自然顺滑。
6. 现场可以拷贝通道项目清单。独立系统锁功能有效防止误操作。内置灯库200多个。
7. 机内固化多种特效程序, 有效支持现场变幻特效。USB存储器,可以有效保存现场数据。
8. 音频输入连接器XILR-D3FX2
9. 产品尺寸:735X595X150MM
10. 净重:21.3kg 毛重:31kg

Product features

1. DMX512/1990 standard, with 2048 DMX channels.
2. Four optoelectronic isolated independent signal output ports. Can withstand 2000VRMS electrical shocks.
3. Independent power supply and independent signal. It can control up to 240pcs lights with 40 channels and 240 dimming channels.
4. The 320X240 large screen displays all operations, changes, and outputs.
5. It can store 450 programs, and the knob has different adjustable speed. XY controls naturally smooth.
6. The project list can be copied on site. The independent system lock function effectively prevents misoperation. More than 200 built-in light libraries.
7. Various special effects programs are solidified inside the machine, effectively supporting on-site changing special effects. USB memory can effectively store on-site data.
8. Audio input connector XILR-D3FX2
9. Product size: 735X595X150MM
10. Net weight: 21.3kg Gross weight: 31kg



老虎触摸控台 Tiger Touch

中文参数

1. 采用功能强大的泰坦操作系统。
2. 英特尔(Intel)酷睿i5双核处理器,120GB固态硬盘,4G运行内存。
3. 本机自带8个DMX输出口, 8192个通道,1个LTC时间码触发口。
4. 内置一个15.6寸电容触摸屏,亮度和可视角度更好,可扩展一个带触摸的高清显示屏。
5. 标准8DMX输出端口和MIDI接口,4096个DMX通道。可扩展至64个DMX输出口,32768DMX通道。
6. 内置UPS电源,断电可供电30分钟左右(可以定制断电可工作时间)防止突然断电系统损坏丢失程序。
7. 可扩展为1到5小时特有的无需接外部电源开机工作。
8. 内置图形发生器,且内置效果可以同步。
9. 控台内置播放器时间码,可以很方便编辑灯光秀。
10. 10个宏按键,可编辑任何程序。
11. 20个重放推杆,支持1000个虚拟重放。
12. 强大的属性控制窗口, CMY RGB拾色板系统。
13. 支持涂鸦式手写命名功能,支持Art-Net网络功能。
14. 支持中文菜单显示,且内置多国语言。
15. 内置数千种灯库, 并内置灯库编辑软件,你可以随时在控台上编写灯库
16. 内置Visualiser可视化舞台模拟软件,支持视频,可预编程!
17. 支持MIDI时间码声光同步功能,也可以在控台里播放音乐发送时间码来控制灯光程序重放。
18. 产品重量:净重14KG,纸箱包装18KG,航空箱包装29KG·

Product features

1. Adopting a powerful Titan operating system.
2. Intel Core i5 dual core processor, 120GB solid-state drive, 4GB RAM.
3. This machine comes with 8 DMX output ports, 8192 channels, and 1 LTC time code trigger port.
4. Equipped with a 15.6-inch capacitive touch screen, it provides better brightness and viewing angle, and can be extended to a high-definition touch screen display.
5. Standard 8 DMX output ports and MIDI interface, with 4096 DMX channels. Scalable to 64 DMX output ports, with 32768 DMX channels.
6. Equipped with a built-in UPS power supply, it can provide power for about 30 minutes after a power outage (customizable power outage working time) to prevent system damage and program loss due to sudden power outages.
7. It can be expanded to operate for 1 to 5 hours without the need for external power supply.
8. Equipped with a built-in graphics generator and synchronized effects.
9. The console has a built-in player with a time code, making it easy to edit lighting shows.
10. 10 macro buttons, can edit any program.
11. 20 replay push slides, supporting 1000 virtual replays.
12. Powerful attribute control window, CMY RGB color palette system.
13. Support graffiti style handwriting naming function and Art Net network function.
14. Support Chinese menu display and built-in multiple languages.
15. Equipped with thousands of built-in light libraries and built-in light library editing software, you can write a light library on the console at any time
16. Built in Visualiser visual stage simulation software, supports video, and can be pre programmed!
17. Supports MIDI time code sound and light synchronization function, and can also play music in the console to send time codes to control the playback of lighting programs.
18. Product weight: Net weight 14KG, cardboard box packing 18KG, flight case packing 29KG·
19. Carton packing: L73.5XW63.5xH23.5cm Flight case packing: 73.5x55.5x31.5cm



QO

中文参数

6个DMX输出,1个DMX输入(可设置为输出),连接扩展器,最高可支持65536个通道参数
 内置2个手动调节角度的15.4英寸可调节亮度触摸显示屏,无论白天还是黑夜都能清晰看清楚
 内置15个重放手动带感应功能的推杆(60mm),30个可执行程序按键。可外置15个推杆及30个程序按键
 2个AB场手动推杆(100mm)
 1个总控推杆
 4个功能编码器(带PUSH功能),1个菜单编码器带左右键功能
 1个调光轮
 1个千兆以太网口,支持MA NET, ARTNET信号
 5个USB接口,1个备份USB接口,一个DVI输出口(可外接触摸显示器),外置无线键盘鼠标
 独立德国青轴CHERRY黄色背光按键,手感更好。
 MIDI输入输出接口, LTC/SMPTE时间码,音频输入输出,麦克风输入接口,内置不间断电源
 内置120G固态硬盘, INTEL 六代I5 6500 CPU, 8G 2133M的4代内存,(独立显卡GT750TI,选配)。
 预装WIN7 64位定制版系统(系统可更改)
 支持舞台3D效果模拟,实时现场模拟
 AC 宽电压电源: 100-250V, 50/60Hz
 控台尺寸: 73.5cm*41.5cm*16cm
 航空箱尺寸: 80CM*45CM*33CM
 净重: 19kg 毛重: 32KG

Product features

6 DMX outputs,1 DMX INPUT
 2 internal TFT wide mode touchscreens (15.4" WXGA)
 15 manual executor fader,15 executor button
 4 encoders with push function,1 dimmer roller,2 A/B fader(100mm),1 master fader
 1 etherCON connectors, 4 USB connectors,1 backup usb input
 MIDI IN/OUT ,LTC,MIC IN,SOUND INPUT/OUTPUT
 Individually backlight silent (clickless) keys
 4th I5 CPU,128G SSD,4G RAM
 WIN7 64 BIT system inside
 POWER:100-250ac,50/60HZ,,200VA
 Controller Dimensions: 735*415*160mm,
 flight case dimensions:800*490*330mm
 NW:19kg GW:32kg



ROC8000

中文参数

6个DMX输出,1个DMX输入,连接扩展器,最高可支持65536个通道参数
 内置3个电动可调宽视角15.4英寸触摸屏+1个9英寸高亮度多点触摸屏,可外置2个触摸屏
 30个高精度电动推杆(60mm)
 2个AB场电动推杆(100mm)
 1个主控电动推杆
 7个进口光学编码器(带PUSH功能)
 1个高灵敏轨迹球
 2个千兆以太网口,支持MA NET, ARTNET, ETC
 NET2,PATHPORT,SCAN,SHOWNET,KINET1信号
 5个USB2.0口
 独立可调黄色背光按键,内置键盘和抽屉
 MIDI输入输出接口, LTC/SMPTE时间码, RDM功能
 内置固态硬盘,I5 CPU,8G内存
 兼容MA1和MA2系统,任何版本可以任意升级
 支持多台联机备份
 支持手持式远程控制
 支持舞台3D效果模拟,实时现场模拟
 AC 宽电压电源: 100-240 V, 50/60Hz, 内置不间断电源(UPS)
 控台尺寸: 130cm*66cm*21cm, 航空箱尺寸: 134CM*87CM*33CM
 控台尺寸: 130cm*66cm*21cm, 航空箱尺寸: 134CM*87CM*33CM
 净重: 55KG 毛重: 100KG

Product features

Real-time control for up to 65,536 parameters per session in connection with MA NPU (equivalent to 256 DMX universes)
 8,192 HTP/LTP parameters
 6 DMX outputs
 3 internal TFT wide mode touchscreens (15.4" WXGA)
 2 external TFT screens can be connected (UXGA, touchscreens accepted)
 1 internal command screen – multi-touch (9" SVGA)*
 30 motorized executor faders
 Integrated keyboard drawer
 Built-in uninterruptible power supply (UPS)
 2 etherCON connectors, 5 USB 2.0 connectors
 Motorized monitor wing
 2 motorized A/B fader 100mm Individually backlit and dimmable silent (clickless) keys
 AC110-240V,50/60Hz, with UPS inside Console
 size: 130*66*21 CM
 Flight case:134*87*34CM
 NW:55 kgs GW:100 kgs



8路信号放大器
DMX Splitter



网络处理器
NPU

中文参数

数字信号类型：DMX512/1990

1路输入，1路直通输出

8路光隔离信号分配输出

各输入输出接口之间的电气隔离电压：>1000V

数字信号指示灯

DMX信号输入连接器：XLR-D3M /XLR-D5M

DMX信号直通输出连接器：XLR-D3F/XLR-D5F

DMX信号分配输出连接器：XLR-D3F x 8 /XLR-D5F

电压：AC200-240V, 50-60Hz

尺寸：483*44.5*140mm

重量：4KG

Product features

Digital signal type: DMX512/1990

1 input, 1 direct output

8 optical isolation signal distribution outputs

Electrical isolation voltage between input and output interfaces:>1000V

Digital signal indicator light

DMX signal input connector: XLR-D3M/XLR-D5M

DMX signal direct output connector: XLR-D3F/XLR-D5F

DMX signal distribution output connector: XLR-D3F x 8/XLR-D5F

Voltage: AC200-240V, 50-60Hz

Size: 483 * 44.5 * 140mm

Weight: 4KG

中文参数

在Grand Ma2系统模式下，可控制多达65536个参数（最多256个DMX线路）

4096 HTP / LTP参数

8个DMX输出

内置7寸触摸屏

系统兼容版本3.7.0.5

1个以太网连接器

4个USB2.0接口

净重：9KG

毛重：15KG

体积：58 x 56 x 22cm

Product features

In Grand Ma2 system mode, up to 65536 parameters can be controlled (up to 256 DMX lines)

4096 HTP/LTP parameters

8 DMX outputs

Built in 7-inch touch screen

System compatible version 3.7.0.5

1 Ethernet connector

4 USB 2.0 interfaces

Net weight: 9KG

Gross weight: 15KG

Volume: 58 x 56 x 22cm

广州市皓腾灯光有限公司
Idealight Industrial Co., Limited

地址：广州市花都区新雅街华兴工业区华兴中路9号
Add: No. 9, Hua Xing Zhong Road, Huaxing Industrial Park,
Xinhua Town, Huadu District, Guangzhou, China

邮编/ Postcode: 510800

电话/ Tel: +86-(0)20-36815648

传真/ Fax: +86-(0)20-36815248

邮箱/ E-mail: sales@idealight.com.cn

网址/ Website: www.idealight.com.cn

www.idealight-china.com